


Overview

HPE ProLiant DL360 Gen10 Plus server

Do you need to efficiently expand or refresh your IT infrastructure to propel the business? Adaptable for diverse workloads and environments, the compact 1U HPE ProLiant DL360 Gen10 Plus server delivers enhanced performance with the right balance of expandability and density. Designed for supreme versatility and resiliency while backed by a comprehensive warranty, the HPE ProLiant DL360 Gen10 Plus server is ideal for IT infrastructure, either physical, virtual, or containerized.

The HPE ProLiant DL360 Gen10 Plus server supports the 3rd Generation Intel® Xeon® Scalable Processors with up to 40 cores, plus 3200 MT/s HPE DDR4 Smart Memory up to 4.0 TB per socket. Introducing PCIe Gen4 and Intel® Software Guard Extensions (SGX) support on the dual-socket segment, the HPE ProLiant DL360 Gen10 Plus server complements Gen10 reach by delivering premium compute, memory, I/O, and security capabilities for customers focused on performance at any cost.

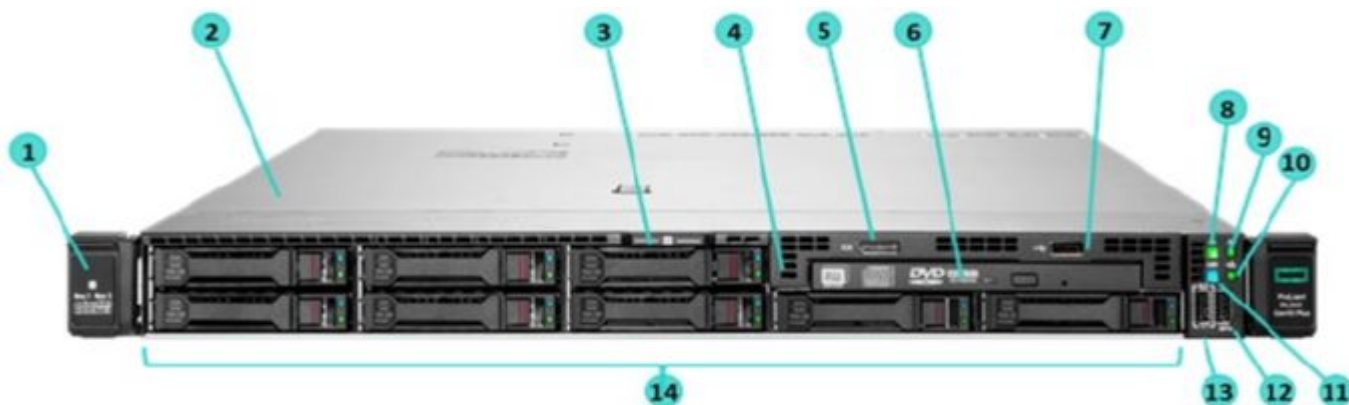


8 SFF Front View - 8 SFF + optional Universal Media Bay, optical drive, and SAS drives shown

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. Drive support label 2. Quick removal access panel 3. Serial number/iLO information pull tab 4. Universal Media Bay (optional): - Option: Optical drive bay + Display port & USB 2.0 port kit (shown) - Option: 2 SFF 12G x1 SAS/SATA cage - Option: 2 SFF 24G x4 Tri-Mode U.3 cage - Option: 2 SFF 16G x4 NVMe U.2 cage 5. Display Port (optional) 6. Optical drive (optional - shown) 7. USB 2.0 port (optional) | <ol style="list-style-type: none"> 8. Power On/Standby button and system power LED 9. Health LED 10. NIC status LED 11. UID button/LED 12. USB 3.0 port 13. iLO Service Port 14. Drive bays; optional backplanes:: - Option: 8 SFF 12G x1 SAS/SATA - Option: 8 SFF 24G x1 Tri-Mode U.3 - Option: 8 SFF 24G x4 Tri-Mode U.3 - Option: 8 SFF 16G x4 NVMe U.2 |
|--|---|

Notes: Systems Insight Display (SID) module will include #8-12 above (will not include #13 - iLO Service Port).


Overview

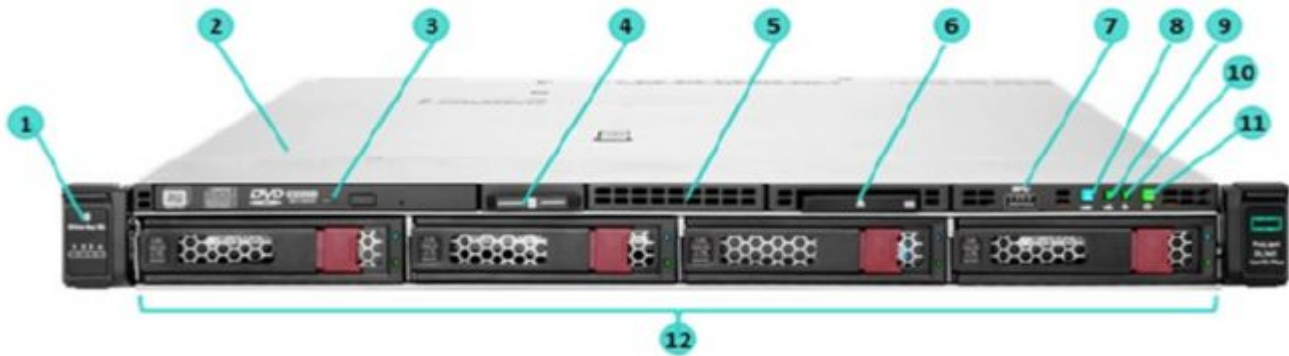

4 LFF Front View - 4 LFF + Optional Systems Insight Display (SID), optical drive and SAS drives shown

- | | |
|---|--|
| 1. Drive support label | 7. USB 3.0 Port |
| 2. Quick removal access panel | 8. UID button/LED |
| 3. Optical drive (optional - shown) | 9. NIC status LED |
| 4. Serial number/iLO information pull tab | 10. Health LED |
| 5. Option: Display port & USB 2.0 port Kit (blank shown) | 11. Power On/Standby button and system power LED |
| 6. Option: Systems Insight Display (SID) ¹ - Shown | 12. SAS/SATA drive bays |


Notes: ¹This option will lose iLO Service Port.

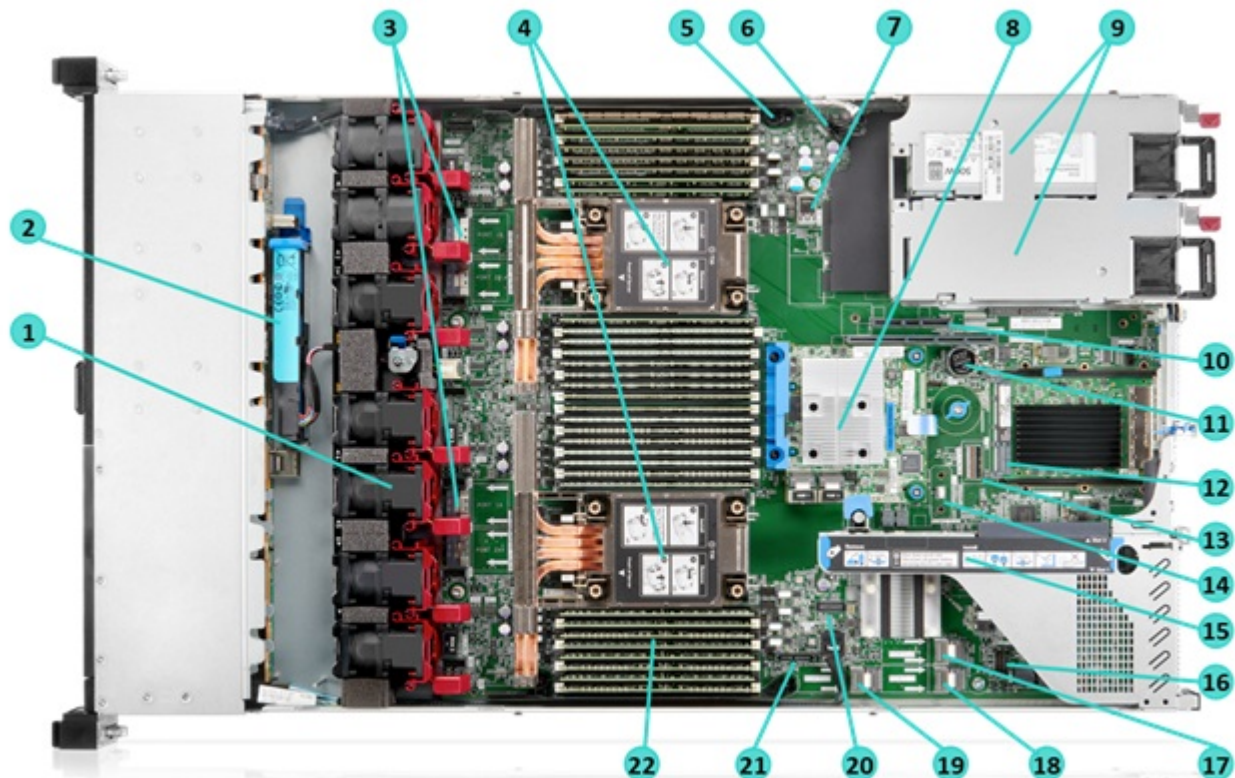

Internal View - Standard for all DL360 Gen10 Plus

Overview

1. Hot plug fans (single rotor standard)
 - 1 CPU - 5 fans
 - 2 CPUs - 7 fans
- Option: High Performance fans
2. Option: HPE Smart Hybrid Capacitor or HPE Smart Storage Battery
3. 4 x8 NVMe ports (1A - 2B)
4. Up to 2 processors (shown with high performance heat sinks)
5. Optional Chassis Intrusion Detection connector
6. Hard Drive backplane power connector
7. Dual internal USB 3.0 connector
8. Storage Controller (Type -a shown)
9. Up to 2 Power Supplies for redundant power
10. Secondary (CPU2) PCIe 4.0 riser
 - Option: Low Profile x16
 - Option: Full Height x16 (lose slot 2 on Primary riser)
11. System Battery
12. x16 OCP connector (supports various NICs up to 200GbE)
13. Vertical slimline SAS connector (AROC lane recovery)
14. TPM 2.0 (included on Pre-Configured Models)
15. Primary (CPU1) PCIe 4.0 riser
 - Standard: 2x 16 slots, AUX power block
 - Option: 1 x16 and 1 x8 slots + 2x PCIe M.2 connectors with HW RAID support
 - Option: (SFF only): 1 x16 and 1 x8 slots + 1 x8 NVMe connector
16. Optional front Display Port / USB 2.0 port connector
17. x4 SATA port 1
18. x4 SATA port 2
19. x4 SATA port 3
20. Front Power USB 3.0 connector
21. Optical/SATA port
22. DDR4 DIMM slots (Fully populated 32 DIMMs shown)

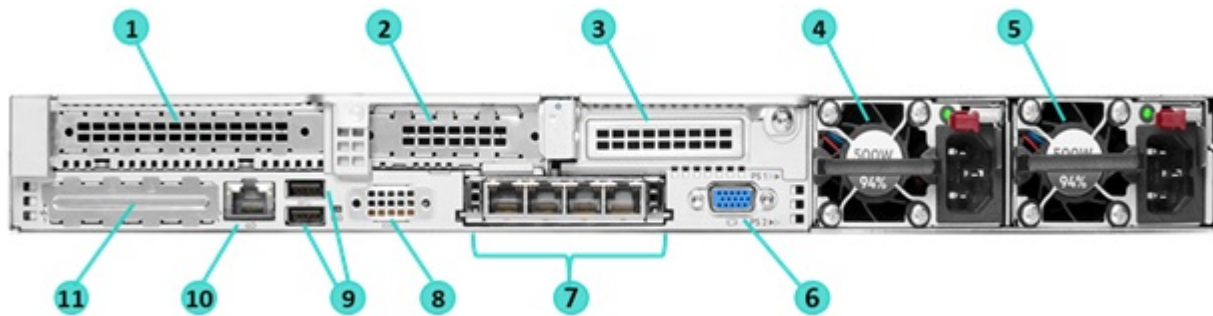

Rear View - Standard for all DL360 Gen10 Plus

1. Slot 1 PCIe 4.0 - Full Height
2. Slot 2 PCIe 4.0 - Low Profile
3. Option: Slot 3 PCIe 4.0 (Requires 2nd processor)
 - Low Profile and Full Height options
4. Power Supply 2
5. Power Supply 1
6. Video (VGA) port
7. OCP 3.0 Adapter (if equipped)¹
8. Option: Serial port (knockout blank shown)
9. USB 3.0 Ports
10. iLO Management Port
11. Blank cover, not available for use

Notes: ¹ Supports various NICs, up to 200GbE.

What's New

Overview

- New Pre-configured SKUs using Broadcom Tri-mode controllers
 - New Pre-configured SKU using HPE SR100i Gen10 Plus FIO Software RAID/VROC SATA controller
 - HPE NVMe Gen4 High Performance Low Latency Write Intensive SFF BC U.2 P5800X SSD drives
 - HPE 1800W-2200W Flex Slot Titanium Hot Plug Power Supply Kit
-

Platform Information

Form Factor

- 1U rack

Chassis Types

- 8 SFF with options for additional 2 SFF drive bays: 12G x1 SAS/SATA, 24G x4 Tri-Mode or 16G x4 NVMe
- 4 LFF

System Fans

- Single rotor hot plug fans by default

Notes:

- Optional High Performance Fan Kit available (includes 7 fans).
 - The DL360 Gen10 Plus will support up to 7 fans with fan redundancy built in. One fan rotor failure will place server in degraded mode but fully functional. Two fan rotor failures could provide warning and imminent server shutdown.
-

Standard Features

Processors - Up to 2 of the following, depending on model.

Notes:

- The 2nd digit of the processor model number "x3xx" is used to denote the processor generation (i.e. 3 = 3rd generation).
- This table covers the public Intel offering only.
- For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

| Intel Xeon Processor | | |
|----------------------|------------------------------------|--|
| Processor Suffix | Description | Offering |
| M | Media and AI Optimized | Media, AI and HPC Segment Optimized for lower TDP & higher frequencies, targeting following use cases: Media Processing and Delivery, Deep Learning Inference, Media Analytics workloads and HPC acceleration. |
| N | NFV/Networking Optimized | SKUs specifically designed for NFV and networking workloads, such as: L3 fwding, 5G UPF, OVS DPDK, VPP FIB router, VPP IPsec, web server/NGINX, vEPC, vBNG, and vCMTS. SKUs have higher base frequency with lower TDPs to enable best performance/WattUp to 4.5 TB addressable memory per socket. |
| P | High performance IaaS | Optimized for orchestration efficiency, IaaS higher frequency for VM markets. |
| S | Max SGX Enclave | Supports Software Guard Extensions maximum enclave size (512GB). |
| U | 1 Socket Optimized | Focused on single socket (1P) configurations, delivering competitive system perf/\$. Does not support two socket (2P) arrangements. |
| V | High VM Density | Optimized for orchestration efficiency and high density, lower power VM environments. |
| Y | Speed Select - Performance Profile | Intel® SST-PP (performance profile) provides the ability to set a guaranteed base frequency for a specific number of cores, and assign this performance profile to a particular application/workload to guarantee performance requirements. Also enables configuration of settings during runtime and provides additional frequency profile arrangement opportunities. |

Notes:

- 4.0TB maximum RAM per socket.
- 64 PCIe 4.0 lanes.
- 1.5 MB L3 cache/core, except on 6354 and 6346 processors (2.16 and 2.25 MB L3/core respectively).
- "U" processors (i.e. 6314U, 6312U) only supported in single socket configurations.
- Intel SST-CP (Core Power)- Enables flexibility for workloads that benefit from higher base frequency on a subset of the processor's cores. While the max turbo frequency across the cores remain constant across the cores, a subset of the cores can be assigned as to run at a higher base frequency than specified, while the other cores run at lower base frequency.
- Intel SST-TF (Turbo Frequency)- Enables flexibility for workloads that benefit from higher turbo frequency on a subset of the processor's cores. While the base frequency remains constant across the cores, a subset of the cores can be assigned to run at a higher turbo frequency than specified, while the other cores run at lower turbo frequency.
- Intel SST-BF (Base Frequency)- Allows the configuration of a guaranteed higher base frequency, for a specific number of cores, to support those workloads and applications that are not optimized for turbo frequencies.
- Intel Speed select SST-BF, SST-TF, SST-CP supported on Gold and Platinum processors. Power Profile (SST-PP) supported on Y, and select V, S and N processors.

Standard Features

| 3 rd Generation Intel® Xeon® Scalable Processor Family | | | | | | | |
|---|--|-----------------------------|----------|-----------------------------------|---------------|-----------|------------------|
| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | SGX Enclave size |
| Platinum 8380 Processor | 2.3 GHz | 40 | 60 MB | 270W | 3 @ 11.2 GT/s | 3200 MT/s | 512GB |
| Platinum 8368 Processor ⁵ | 2.4 GHz | 38 | 57 MB | 270W | 3 @ 11.2 GT/s | 3200 MT/s | 512GB |
| Platinum 8362 Processor ⁶ | 2.8 GHz | 32 | 48 MB | 265W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Platinum 8360Y Processor | 2.4 GHz ⁴ 2.5 GHz 2.6 GHz | 36 ⁴ 32 24 | 54 MB | 250W ⁴ 250W 220W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Platinum 8358P Processor ¹ | 2.6 GHz | 32 | 48 MB | 240W | 3 @ 11.2 GT/s | 3200 MT/s | 8GB |
| Platinum 8358 Processor | 2.6 GHz | 32 | 48 MB | 250W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Platinum 8352Y Processor | 2.2 GHz ⁴ 2.3 GHz 2.6 GHz | 32 ⁴ 24 16 | 48 MB | 205W ⁴ 185W 185W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Platinum 8352V Processor ^{1,2} | 2.1 GHz ⁴ 2.0 GHz 2.0 GHz | 36 ⁴ 32 24 | 54 MB | 195W ⁴ 180W 155W | 3 @ 11.2 GT/s | 2933 MT/s | 8GB |
| Platinum 8352S Processor ² | 2.2 GHz ⁴ 2.3 GHz 2.6 GHz | 32 ⁴ 24 16 | 48 MB | 205W ⁴ 185W 185W | 3 @ 11.2 GT/s | 3200 MT/s | 512GB |
| Platinum 8352M Processor ^{2,4,6} | 2.3 GHz ⁴ 2.4 GHz 2.6 GHz | 32 ⁴ 28 24 | 48 MB | 185W ⁴ 185W 185W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Platinum 8351N Processor ³ | 2.4 GHz | 36 | 54 MB | 225W | N/A | 2933 MT/s | 64GB |

Notes:

- 8-Channel DDR4 @ 3200 MT/s (lower DDR4 speed may be used in segment optimized processors (i.e. Cloud, NFV, etc).
- Support for Intel Optane Persistent Memory 200 Series, enabling up to 6TB memory per socket (does not work with SGX).
- 2 socket capable, 3 UPI @ 11.2 GT/s.
- Advanced RAS (except 8358P), AVX-512 2 FMA, SGX 64GB, TME-MT 64 keys.
- ¹Deterministic base frequency rating only applicable to VM workloads. Other workloads may see throttling.
- ²Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- ³Single socket capable even though not being a "U" processor. No dual socket support.
- ⁴Default Speed Select Performance Profile value.
- ⁵Does not support Sub-NUMA 2 (SNC2).
- ⁶Does not support Intel Speed Select Technology - Base Frequency (SST-BF).

Standard Features

| 3 rd Generation Intel® Xeon® Scalable Processor Family | | | | | | | |
|---|--|----------------------------|----------|-----------------------------------|---------------|-----------|------------------|
| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | SGX Enclave size |
| Gold 6354 Processor | 3.0 GHz | 18 | 39 MB | 205W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Gold 6348 Processor | 2.6 GHz | 28 | 42 MB | 235W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Gold 6346 Processor | 3.1 GHz | 16 | 36 MB | 205W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Gold 6342 Processor | 2.8 GHz | 24 | 36 MB | 230W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Gold 6338N Processor ¹ | 2.2 GHz | 32 | 48 MB | 185W | 3 @ 11.2 GT/s | 2667 MT/s | 64GB |
| Gold 6338 Processor | 2.0 GHz | 32 | 48 MB | 205W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Gold 6336Y Processor | 2.4 GHz ³ 2.9 GHz 3.1 GHz | 24 ³ 12 8 | 36 MB | 185W ³ 150W 150W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Gold 6334 Processor | 3.6 GHz | 8 | 18 MB | 165W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Gold 6330N Processor ¹ | 2.2 GHz | 28 | 42 MB | 165W | 3 @ 11.2 GT/s | 2667 MT/s | 64GB |
| Gold 6330 Processor | 2.0 GHz | 28 | 42 MB | 205W | 3 @ 11.2 GT/s | 2933 MT/s | 64GB |
| Gold 6326 Processor | 2.9 GHz | 16 | 24 MB | 185W | 3 @ 11.2 GT/s | 3200 MT/s | 64GB |
| Gold 6314U Processor ² | 2.3 GHz | 32 | 48 MB | 205W | N/A | 3200 MT/s | 64GB |
| Gold 6312U Processor ² | 2.4 GHz | 24 | 36 MB | 185W | N/A | 3200 MT/s | 64GB |

- Notes:**
- 8-channel DDR4 @ 3200 MT/s (lower DDR4 speed may be used in segment optimized processors (i.e. NFV, etc).
 - Support for Intel Optane Persistent Memory 200 Series, enabling up to 6TB memory per socket (does not work with SGX).
 - 2 sockets capable, 3 UPI @ 11.2 GT/s.
 - Advanced RAS, AVX-512 2 FMA, SGX 64GB, TME-MT 64 keys.
 - ¹Deterministic base frequency rating only applicable for NFV workloads. Other workloads may see throttling.
 - ²Single socket capable, no dual socket support
 - ³Default Speed Select Performance Profile value.

Standard Features

| 3rd Generation Intel® Xeon® Scalable Processor Family | | | | | | | |
|---|--|-----------------------------|----------|-----------------------------------|---------------|-----------|------------------|
| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | SGX Enclave size |
| Gold 5320 Processor | 2.2 GHz | 26 | 39 MB | 185W | 3 @ 11.2 GT/s | 2933 MT/s | 64GB |
| Gold 5318Y Processor | 2.1 GHz ³ 1.9GHz 2.0GHz | 24 ³ 24 22 | 36 MB | 165W ³ 150W 150W | 3 @ 11.2 GT/s | 2933 MT/s | 64GB |
| Gold 5318S Processor ¹ | 2.1 GHz ³ 1.9GHz 2.0GHz | 24 ³ 24 22 | 36 MB | 165W ³ 150W 150W | 3 @ 11.2 GT/s | 2933 MT/s | 512GB |
| Gold 5318N Processor ^{1,2} | 2.1 GHz ³ 2.0GHz | 24 ³ 20 | 36 MB | 150W ³ 135W | 3 @ 11.2 GT/s | 2667 MT/s | 64GB |
| Gold 5317 Processor | 3.0 GHz | 12 | 18 MB | 150W | 3 @ 11.2 GT/s | 2933 MT/s | 64GB |
| Gold 5315Y Processor | 3.2 GHz ³ 3.2GHz 3.4GHz | 8 ³ 6 4 | 12 MB | 140W ³ 125W 115W | 3 @ 11.2 GT/s | 2933 MT/s | 64GB |

- Notes:**
- 8-channel DDR4 @ 2933 MT/s (lower DDR4 speed may be used in segment optimized processors (i.e. NFV, etc).
 - Support for Intel Optane Persistent Memory 200 Series, enabling up to 6TB memory per socket (does not work with SGX).
 - 2 sockets capable, 3 UPI @ 11.2 GT/s.
 - Advanced RAS, AVX-512 2 FMA, SGX 64GB, TME-MT 64 keys.
 - ¹Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
 - ²Deterministic base frequency rating only applicable for NFV workloads. Other workloads may see throttling.
 - ³Default Speed Select Performance Profile value.

| 3rd Generation Intel® Xeon® Scalable Processor Family | | | | | | | |
|---|--|--------------------------|----------|---------------------------------|---------------|-----------|------------------|
| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | SGX Enclave size |
| Silver 4316 Processor | 2.3 GHz | 20 | 30 MB | 150W | 2 @ 10.4 GT/s | 2667 MT/s | 8GB |
| Silver 4314 Processor ¹ | 2.4 GHz | 16 | 24 MB | 135W | 2 @ 10.4 GT/s | 2667 MT/s | 8GB |
| Silver 4310 Processor | 2.1 GHz | 12 | 18 MB | 120W | 2 @ 10.4 GT/s | 2667 MT/s | 8GB |
| Silver 4309Y Processor | 2.8 GHz ² 2.6GHz 2.3GHz | 8 ² 8 8 | 12 MB | 105W ² 95W 85W | 2 @ 10.4 GT/s | 2667 MT/s | 8GB |

- Notes:**
- 8-channel DDR4 @ 2667 MT/s.
 - 2 sockets capable, 2 UPI @ 10.4 GT/s.
 - Standard RAS, AVX-512 2 FMA, SGX 8GB, TME-MT 64 keys.
 - ¹Supports Intel Optane Persistent Memory 200 Series, enabling up to 6TB memory per socket (does not work with SGX).
 - ²Default Speed Select Performance Profile value.

Standard Features

Chipset

Intel C621A Chipset

Notes: For more information regarding Intel® chipsets, please see the following URL:

<https://www.intel.com/content/www/us/en/products/chipsets/server-chipsets.html>

System Management Chipset

HPE iLO 5 ASIC

Notes: Read and learn more in the [iLO QuickSpecs](#).

Memory

| Type | HPE DDR4 Smart Memory | Registered (RDIMM), Load Reduced (LRDIMM) |
|---|-----------------------|--|
| DIMM Slots Available | 32 | 16 DIMM slots per processor, 8 channels per processor, 2 DIMMs per channel |
| Maximum capacity (LRDIMM) | 8.0 TB | 32 x 256 GB LRDIMM @ 3200 MT/s |
| Maximum capacity (RDIMM) | 2.0 TB | 32 x 64 GB RDIMM @ 3200 MT/s |
| Maximum capacity (Intel Persistent Memory) | 8.0 TB | 16 x 512 GB Intel Persistent Memory 200 Series for HPE |

Notes:

- All processors support up to 6TB memory per socket.
- Mixing of RDIMM and LRDIMM memory is not supported.
- To realize the performance memory capabilities listed in this document, HPE DDR4 Smart Memory is required.
- For additional information, please see the [HPE DDR4 Smart Memory QuickSpecs](#).
- Intel Persistent Memory 200 series only supported on Gold and Platinum Processors.
- For General Server Memory and Persistent Memory Population Rules and Guidelines for Gen10 Plus see details here: <http://www.hpe.com/docs/memory-population-rules>

Memory Protection

Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

Online Spare

Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

Notes: For more information see our [Memory RAS feature technical whitepaper](#).

Expansion Slots

Primary GPU Riser

| Expansion Slots # | Technology | Bus Width | Connector Width | Processor | Slot Form Factor |
|-------------------|------------|-----------|-----------------|-----------|--------------------------------|
| 1 | PCIe 4.0 | x16 | x16 | CPU 1 | Full-height, up to 9.5" length |
| 2 | PCIe 4.0 | x16 | x16 | CPU 1 | Low Profile, up to 9.5" length |

Notes: The specifications above correspond with the default primary riser.

Standard Features

| Primary PCIe M.2 Riser with HW RAID support (NS204i-r) | | | | | |
|--|------------|-----------|-----------------|-----------|--------------------------------|
| Expansion Slots # | Technology | Bus Width | Connector Width | Processor | Slot Form Factor |
| 1 | PCIe 4.0 | x16 | x16 | CPU 1 | Full-height, up to 9.5" length |
| 2 | PCIe 4.0 | X8 | X8 | CPU 1 | Low Profile, up to 9.5" length |

Notes:

Does not include M.2 media, 22110 capable.

Requires high performance fan kit (P26477-B21).

| Primary NVMe Riser | | | | | |
|--------------------|------------|-----------|-----------------|-----------|--------------------------------|
| Expansion Slots # | Technology | Bus Width | Connector Width | Processor | Slot Form Factor |
| 1 | PCIe 4.0 | x16 | x16 | CPU 1 | Full-height, up to 9.5" length |
| 2 | PCIe 4.0 | x8 | x8 | CPU 1 | Low Profile, up to 9.5" length |

Notes: Requires high performance fan kit (P26477-B21).

| Secondary Riser* | | | | | |
|-------------------|------------|-----------|-----------------|-----------|---|
| Expansion Slots # | Technology | Bus Width | Connector Width | Processor | Slot Form Factor |
| 3 | PCIe 4.0 | x16 | x16 | CPU 2 | Low Profile or Full-height, up to 9.5" length |

Notes: If secondary full height kit is installed, then primary PCIe Slot #2 cannot be used. Only 2 full height slots are supported.

Internal Storage Devices

- **Optical Drive**

Available on 8 SFF and 4 LFF CTO Servers as an option (DVD-ROM or DVD-RW)

- **Hard Drives**

None ship standard

Storage Controllers NVMe Boot Devices

- HPE DL36X Gen10 Plus x16/x8 M.2 NS204i-r Riser
- HPE NS204i-p NVMe PCIe3 OS Boot Device

Software RAID

- **HPE Smart Storage SR100i SR Gen10 Plus SW RAID**

Notes:

– All models feature an embedded storage controller, capable of operating on AHCI or SR100i modes, with

Standard Features

embedded software supporting RAID for either up to 14 SATA drives or 2 NVMe SSDs. In addition, all models feature 2 x8 PCIe 4.0 connectors per socket for NVMe SSDs, which must be used on SR100i mode. NVMe SSDs are qualified on SFF models only.

- HPE Smart Storage SR100i SR Gen10 Plus SW RAID will operate in UEFI mode only. For legacy support an additional controller will be needed, and for CTO orders please also select Legacy mode setting (758959-B22).
- HPE Smart Storage SR100i SR Gen10 Plus SW RAID is off by default and must be enabled.
- Supports Microsoft Windows Server only.
- For Linux users, HPE offers a solution that uses in-distro open-source software to create a two-disk RAID 1 boot volume. For more information visit: <https://downloads.linux.hpe.com/SDR/project/lsrrb/>

• Intel VROC NVMe for HPE ProLiant Gen10 Plus

Notes:

- All models feature 2 x8 PCIe 4.0 connectors per socket for NVMe connectivity. On 2P configurations, these provide support for up to 8 direct attach NVMe bays. Options available to connect 2 additional bays.
- Only supported on SFF models.
- Intel VROC for HPE ProLiant Gen10 Plus is an enterprise, hybrid Software RAID solution specifically designed for NVMe SSDs connected directly to the CPU. Intel VROC is a software-based solution utilizing Intel CPU to RAID or HBA direct connected drives and supports both Intel® SFF SSDs and HPE SFF SSDs.
- RAID Support- 0/1/5/10.
- Windows, Linux, VMware OS support.
- Host Tools- Windows GUI/CLI, Linux CLI.
- UEFI Support- HII Utility, OBSE.
- Active health monitoring of NVMe M.2 drives requires use of SMART tools.
- Intel VROC NVMe for HPE ProLiant Gen10 Plus will operate in UEFI mode only. For legacy support an additional Tri-Mode controller will be needed, and for CTO orders please also select Legacy mode setting (758959-B22).
- For NVMe SSDs only, no PCIe card support.
- Intel VROC NVMe is off by default and requires licensing, see options for details.

• Intel VROC SATA for HPE ProLiant Gen10 Plus

Notes:

- All models feature an embedded storage controller, with embedded software SATA RAID support for up to 14 bays.
- Intel VROC for HPE ProLiant Gen10 Plus is an enterprise, hybrid Software RAID solution specifically designed for SSDs. Intel VROC is a software-based solution utilizing Intel CPU to RAID or HBA direct connected drives and supports both Intel® SFF SSDs and HPE SFF SSDs.
- RAID Support- 0/1/5/10.
- Windows and Linux OS support.
- Host Tools- Windows GUI/CLI, Linux CLI.
- UEFI Support- HII Utility, OBSE.
- iLO Support- IML, Alert, SNMP, AHS.
- iLO Redfish- Redfish Read .
- ** Requires AMS & iLO 2.42.
- Intel VROC SATA for HPE ProLiant Gen10 Plus will operate in UEFI mode only. For legacy support an additional storage controller will be needed, and for CTO orders please also select Legacy mode setting (758959-B22).
- Intel VROC SATA is off by default and must be enabled.

Standard Features

Essential RAID Controllers

- Broadcom MR216i-a Tri-Mode Controller for HPE Gen10 Plus
- Broadcom MR216i-p Tri-Mode Controller for HPE Gen10 Plus
- HPE Smart Array E208i-a SR Gen10 Controller
- HPE Smart Array E208i-a SR G10 LH Controller
- HPE Smart Array E208i-p SR Gen10 Controller
- HPE Smart Array E208e-p SR Gen10 Controller

Performance RAID Controllers

- Microchip SR932i-p Tri-Mode Controller for HPE Gen10 Plus
- Microchip SR416i-a Tri-Mode Controller for HPE Gen10 Plus
- Broadcom MR416i-p Tri-Mode Controller for HPE Gen10 Plus
- Broadcom MR416i-a Tri-Mode Controller for HPE Gen10 Plus
- HPE Smart Array P408i-a SR Gen10 Controller
- HPE Smart Array P408i-a SR G10 LH Controller
- HPE Smart Array P408i-p SR Gen10 Controller
- HPE Smart Array P408e-p SR Gen10 Controller
- HPE Smart Array P816i-a SR Gen10 Controller
- HPE Smart Array P816i-a SR G10 LH Controller

Notes: If an accelerator needs to be installed on slots 2 or 3, then an LH storage controller (low profile heatsink) should be ordered to allow it to fit in the server.

For additional details, please see:

[HPE Smart Array SR Gen10 Controllers for HPE ProLiant DL, ML and Apollo Servers.](#)

Maximum Storage

| Storage | Capacity | Configuration |
|----------------------------|----------|--|
| Hot Plug SFF SAS HDD | 24.0 TB | 8+2 x 2.4 TB (with optional 2 SFF cage on UMB) |
| Hot Plug SFF SATA HDD | 20.0 TB | 8+2 x 2.0 TB (with optional 2 SFF cage on UMB) |
| Hot Plug SFF SAS SSD | 153.0 TB | 8+2 x 15.3 TB (with optional 2 SFF cage on UMB) |
| Hot Plug SFF SATA SSD | 76.8 TB | 8+2 x 7.68 TB (with optional 2 SFF cage on UMB) |
| Hot Plug SFF NVMe PCIe SSD | 153.6 TB | 8+2 x 15.36 TB (with optional 2 SFF cage on UMB) |
| Hot Plug LFF SAS HDD | 72.0 TB | 4 x 18 TB |
| Hot Plug LFF SATA HDD | 72.0 TB | 4 x 18 TB |
| Hot Plug LFF SAS SSD | 6.40 TB | 4 x 1.60 TB |
| Hot Plug LFF SATA SSD | 30.72 TB | 4 x 7.68 TB |
| NVMe M.2 SSD | 960 GB | 2 x 480 GB (with NS204i-p boot device or NS204i-r Riser) |

Graphics

- Integrated video standard
- Video modes up to 1920 x 1200 @ 60 Hz (32 bpp)
- 16 MB Video Memory
- HPE iLO 5 on system management memory
- 32 MB Flash
- 4 Gbit DDR3 with ECC protection

Standard Features

Power Supply

- HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes: Available in 94% efficiency.
- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes:
 - Available in 94% and 96% efficiency.
 - Also available in -48VDC and 227VAC/380VDC power inputs.
- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes:
 - Available in 94% efficiency.
 - 1600W Power supplies only support high line voltage (200 VAC to 240 VAC).
- HPE 1800W-2200W Flex Slot Titanium Hot Plug Power Supply Kit
Notes:
 - Available in 96% efficiency.
 - 1800-2200W Titanium Power supply only supports high line voltage (200 VAC to 240 VAC).

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Plus Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [HPE Power Cords and Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Flexible Slot Power Supplies](#).

Interfaces

| | |
|--------------------------------------|---|
| Serial | 1 port - Optional |
| Video | 1 Front - Display port (optional) 1 Rear - VGA port (standard on all models) Notes: Both ports are not active simultaneously. |
| Network Ports | None. Choice of OCP or stand up card, supporting a wide arrange of NIC adapters |
| HPE iLO Remote Mgmt Port | 1 GbE Dedicated |
| Front iLO Service Port | 1 standard |
| MicroSD Slot | Optional via HPE 32GB microSD RAID1 USB Boot Device Notes: MicroSD cards are not hot-pluggable, server must be powered down before removal. |
| USB 3.0 | 5 standard on all models: 1 front, 2 rear, 2 internal +1 optional USB 2.0 front |
| SID (Systems Insight Display) | Optional for all models Notes: Will lose iLO Service Port if selecting this option. |

Standard Features

Operating Systems and Virtualization Software

- **Microsoft Windows Server** 2016, 2019, 2022: Essentials, Standard, Datacenter
- **Microsoft Hyper-V Server:** 2016, 2019 & 2022
- **VMware vSphere:** 6.7 U3 w /P03, 7.0 U2
- **Red Hat Enterprise Linux (RHEL):** 7.9, 8.2 (64 bit, includes KVM)
- **SUSE Linux Enterprise Server (SLES):** 12 SP5, 15 SP2 (64 bit, includes KVM & Xen) **
- **Canonical Ubuntu:** 20.04 LTS (64 bit)
- **Oracle Linux:** 7.9, 8.2
- **Citrix:** Hypervisor: 8.2 LTSR

Notes: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server visit [HPE Support and Certification Matrices | Hewlett Packard Enterprise](#)

Industry Standard Compliance

- ACPI 6.3 Compliant
- PCIe 4.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- USB 3.0 Compliant
- USB 2.0 Compliant (only on optional Universal Media Bay)
- SMBIOS 3.2
- Redfish API
- IPMI 2.0
- Secure Digital 4.0
- TPM 1.2 and 2.0 support
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line (SMASH CLP)
- Active Directory v1.0
- ASHRAE A3/A4

Notes:

- For additional technical, thermal details regarding ambient temperature, humidity, and feature support, please visit <http://www.hpe.com/servers/ashrae>
- At Standard Operating Support conditions, there is no time limitation for operating the servers in ASHRAE Class A2 conditions, unless otherwise specified in the applicable product information.

- **European Union Erp Lot 9 Regulation**
European Union (EU) eco-design regulations for server and storage products, known as Lot 9, establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 Plus servers are compliant with Lot9 requirements. Please visit: <https://www.hpe.com/us/en/about/environment/msds-specs-more.html> for more information regarding HPE Lot 9 conformance. Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA),

Standard Features

the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.

HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

- UEFI (Unified Extensible Firmware Interface Forum) 2.6

Notes: UEFI is the default for the DL360 Gen10 Plus. Legacy mode can be selected in the field or as a factory option (758959-B22); some configuration restrictions apply.

HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 Plus servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

Notes: The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload Profiles for simple performance optimization

UEFI Boot Mode only:

- TPM 2.0 Support
- NVMe Boot Support
- Platform Trust Technology (PTT) can be enabled.
- iSCSI Software Initiator Support.
- HTTP/HTTPs Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

Notes:

–For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

–UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Plus Server.

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hpe.com/info/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hpe.com/servers/uefi>.

Standard Features

Intelligent Provisioning

Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning. Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at <https://www.hpe.com/us/en/servers/smart-update.html>.

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9, Gen10 and Gen10 Plus HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities. Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/powershell>.

Standard Features

HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <http://www.hpe.com/info/oneview>.

HPE Systems Insight Manager (HPE SIM)

Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <http://www.hpe.com/info/hpesim>.

Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-2 validation
- Common Criteria certification
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- iLO Security Modes
- Granular control over iLO interfaces
- Smart card (PIV/CAC) and Kerberos based 2-factor Authentication
- Tamper-free updates - components digitally signed and verified
- Secure Recovery - recover critical firmware to known good state on detection of compromised FW
- Ability to rollback firmware
- Secure erase of NAND
- TPM (Trusted Platform Module)
- Bezel Locking Kit
- Chassis Intrusion detection option

HPE Trusted Platform Module

HPE Trusted Platform Module 2.0 is included on Pre-Configured models and can be enabled and disabled using the BIOS.

Notes: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys.

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Notes: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett

Standard Features

Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<https://www.hpe.com/us/en/search-results.html?page=1&q=servers%20warranty&autocomplete=0>

Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE GreenLake for Compute Ops Management

HPE is intelligently transforming compute management with an intuitive cloud operating experience through HPE GreenLake cloud platform to streamline and secure operations from edge-to-cloud. Automated key lifecycle tasks, for onboarding, updating, managing, and monitoring HPE servers, brings agility and greater efficiencies to wherever compute devices reside via a unified single browser-based interface. Manage single locations or multiple, distributed sites. Keep tens to thousands of servers secure with batch policy controls and automated updates.

Compute Ops Management is cloud-native software that is continually updated with new services, features, patches, and fixes. The management application resides in the HPE GreenLake cloud platform (access via <https://console.greenlake.hpe.com>) and leverages the HPE GreenLake architecture, security, and unified operations.

For a complete list of software as-a-service subscription SKUs and more information, visit the HPE GreenLake for Compute Ops Management QuickSpecs:

<https://www.hpe.com/psnow/doc/a50004263enw>

For information on supported HPE servers, the complete list can be found here:

<https://www.hpe.com/info/com-supported-servers>

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9, Gen10 and Gen10 Plus servers. To learn more visit <http://www.hpe.com/info/oneview>.

HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at

<http://www.hpe.com/info/cmu>.

Optional Features

Accelerator and GPGPU Information

Hewlett Packard Enterprise supports various accelerators on select HPE ProLiant servers to support different workloads. The accelerators enable seamless integration of GPU computing with HPE ProLiant servers for high-performance computing, large data center graphics, deep learning and virtual desktop deployments. These accelerators deliver all of the standard benefits of GPU computing while enabling maximum reliability and tight integration with system monitoring and management tools such as HPE Insight Cluster Management Utility.

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go - and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>

Service and Support

HPE Pointnext - Service and Support

Get the most from your HPE Products. Get the expertise you need at every step of your IT journey with **HPE Pointnext Services**. We help you lower your risks and overall costs using automation and methodologies that have been tested and refined by HPE experts through thousands of deployments globally. HPE Pointnext **Advisory Services**, focus on your business outcomes and goals, partnering with you to design your transformation and build a roadmap tuned to your unique challenges. Our **Professional** and **Operational Services** can be leveraged to speed up time-to-production, boost performance and accelerate your business. HPE Pointnext specializes in flawless and on-time implementation, on-budget execution, and creative configurations that get the most out of software and hardware alike.

Consume IT on your terms

HPE GreenLake brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

Managed services to run your IT operations

HPE GreenLake Management Services provides services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

Recommended Services

HPE Pointnext Tech Care.

HPE Pointnext Tech Care is the new operational service experience for HPE products. Tech Care goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Pointnext Tech Care has been reimaged from the ground up to support a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Pointnext Tech Care is available in three response levels. Basic, which provides 9x5 business hour availability and a 2 hour response time. Essential which provides a 15 minute response time 24x7 for most enterprise level customers, and Critical which includes a 6 hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

HPE Pointnext Complete Care

HPE Pointnext Complete Care is a modular, edge-to-cloud IT environment service that provides a holistic approach to optimizing your entire IT environment and achieving agreed upon IT outcomes and business goals through a personalized and customer-centric experience. All delivered by an assigned team of HPE Pointnext Services experts. HPE Pointnext Complete Care provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/completecure>

Service and Support

Other related Services

HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://h20195.www2.hpe.com/v2/Getdocument.aspx?docname=5981-9356enw>

HPE Installation and Startup Service

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

DC for Hyperscale

Complete Care for Hyperscale is available for Service Providers and HPC customers who use a scale out approach to computing with a high volume homogenous infrastructure and resilient architecture can take advantage of this environment support tailored to their operating model.

HPE Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAXxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

HPE Service Credits

HPE Service Credits offers flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

<http://www.hpe.com/ww/learn>

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>.

The HPE Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

Notes: *HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>.

Notes: HPE ProLiant DL385 Gen10 Plus Server is covered under the HPE Service Contract applied to the

Service and Support

[HPE ProLiant Server](#). No separate HPE support services need to be purchased.

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [here](#).

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

Pre-Configured Models

- Pre-Configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
- Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will not be shipped inside the server.
- If you desire a custom configuration please see the "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot 9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more/erp-lot9-servers.html>

Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.

HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

Worldwide Models.

| SKU Number | P39886-B21 P39886-291 P39886-AA1 | P39883-B21 P39883-291 | P39882-B21 P39882-291 |
|----------------------|--|--|--|
| Model Name | HPE ProLiant DL360 Gen10 Plus 4310 2.1GHz 12-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 Plus 4314 2.4GHz 16-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 Plus 5315Y 3.2GHz 8-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server |
| Chassis | 8SFF | 8SFF | 8SFF |
| Backplane | 8SFF 12G x1 SAS UBM2 BC | 8SFF 12G x1 SAS UBM2 BC | 8SFF 12G x1 SAS UBM2 BC |
| Processor | 4310 (12-Core, 2.1 GHz, 120W) | 4314 (16-Core, 2.4 GHz, 135W) ¹ | 5315Y (8-Core, 3.2 GHz, 140W) ² |
| Number of Processors | One processor with standard heatsink | One processor with standard heatsink | One processor with standard heatsink |
| Memory | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2933 MT/s due to processor limitation. |
| Network Controller | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter |

Pre-Configured Models

| | | | |
|---------------------------|---|---|---|
| | HPE Notes: No embedded networking | for HPE Notes: No embedded networking | for HPE Notes: No embedded networking |
| Storage Controller | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery |
| Hard Drive | None included | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x16 LP | 2 PCIe: 1 x16 FH, 1 x16 LP | 2 PCIe: 1 x16 FH, 1 x16 LP |
| Power Supply | 1x 800W | 1x 800W | 1x 800W |
| Fans | 5 - Standard | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Security | TPM (Trusted Platform Module) Notes: Disabled on AA1 SKUs | | |
| Rail Kit | Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

| | | | |
|-----------------------------|---|--|--|
| SKU Number | P55243-B21 P55243-291 | P55242-B21 P55242-291 | P55241-B21 P55241-291 |
| Model Name | HPE ProLiant DL360 Gen10 Plus 5315Y 3.2GHz 8-core 1P 32GB-R MR416i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 Plus 4314 2.4GHz 16-core 1P 32GB-R MR416i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 Plus 4310 2.1GHz 12-core 1P 32GB-R MR416i-a NC 8SFF 800W PS Server |
| Chassis | 8SFF | 8SFF | 8SFF |
| Backplane | 8SFF x1 Tri-mode U.3 BC | 8SFF x1 Tri-mode U.3 BC | 8SFF x1 Tri-mode U.3 BC |
| Processor | 5315Y (8-Core, 3.2 GHz, 140W) ² | 4314 (16-Core, 2.4 GHz, 135W) ¹ | 4310 (12-Core, 2.1 GHz, 120W) |
| Number of Processors | One processor with standard heatsink | One processor with standard heatsink | One processor with standard heatsink |
| Memory | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2933 MT/s due to processor limitation | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. |
| Network Controller | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking |
| Storage Controller | MR416i-a/4GB with Smart Storage Battery | MR416i-a/4GB with Smart Storage Battery | MR416i-a/4GB with Smart Storage Battery |
| Hard Drive | None included | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x16 LP | 2 PCIe: 1 x16 FH, 1 x16 LP | 2 PCIe: 1 x16 FH, 1 x16 LP |
| Power Supply | 1x 800W Platinum | 1x 800W Platinum | 1x 800W Platinum |

Pre-Configured Models

| | | | |
|--------------------|---|----------------------|----------------------|
| Fans | 7 - High Performance | 7 - High Performance | 7 - High Performance |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Security | TPM (Trusted Platform Module) Notes: Disabled on AA1 SKUs | | |
| Rail Kit | Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

| | | |
|-----------------------------|--|--|
| SKU Number | P55240-B21 P55240-291 | P55239-B21 P55239-291 |
| Model Name | HPE ProLiant DL360 Gen10 Plus 4309Y 2.8GHz 8-core 1P 32GB-R MR416i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 Plus 4309Y 2.8GHz 8-core 1P 32GB-R S100i NC 8SFF 800W PS Server ⁴ |
| Chassis | 8SFF | 8SFF |
| Backplane | 8SFF x1 Tri-mode U.3 BC | 8SFF 12G x1 SAS UBM2 BC |
| Processor | 4309Y (8-Core, 2.8 GHz, 105W) ³ | 4309Y (8-Core, 2.8 GHz, 105W) ³ |
| Number of Processors | One processor with standard heatsink | One processor with standard heatsink |
| Memory | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. |
| Network Controller | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking |
| Storage Controller | MR416i-a/4GB with Smart Storage Battery | HPE SR100i Gen10 Plus FIO Software RAID/VROC SATA ⁴ |
| Hard Drive | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x16 LP | 2 PCIe: 1 x16 FH, 1 x16 LP |
| Power Supply | 1x 800W Platinum | 1x 800W Platinum |
| Fans | 7 - High Performance | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 |
| Security | TPM (Trusted Platform Module) Notes: Disabled on AA1 SKUs | |
| Rail Kit | Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | |
| Form Factor | 1U Rack | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | |

Pre-Configured Models

| SKU Number | P55276-421 | P55275-421 | P55274-421 |
|-----------------------------|---|--|--|
| Model Name | HPE ProLiant DL360 Gen10 Plus 5315Y 3.2GHz 8-core 1P 32GB-R MR416i-a NC 8SFF 800W PS EU Server | HPE ProLiant DL360 Gen10 Plus 4314 2.4GHz 16-core 1P 32GB-R MR416i-a NC 8SFF 800W PS EU Server | HPE ProLiant DL360 Gen10 Plus 4310Y 2.1GHz 8-core 1P 32GB-R MR416i-a NC 8SFF 800W PS EU Server |
| Chassis | 8SFF | 8SFF | 8SFF |
| Backplane | 8SFF x1 Tri-mode U.3 BC | 8SFF x1 Tri-mode U.3 BC | 8SFF x1 Tri-mode U.3 BC |
| Processor | 5315Y (8-Core, 3.2 GHz, 140W) ² | 4314 (16-Core, 2.4 GHz, 135W) ¹ | 4310 (12-Core, 2.1 GHz, 120W) |
| Number of Processors | One processor with standard heatsink | One processor with standard heatsink | One processor with standard heatsink |
| Memory | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2933 MT/s due to processor limitation | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. |
| Network Controller | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking |
| Storage Controller | MR416i-a/4GB with Smart Storage Battery | MR416i-a/4GB with Smart Storage Battery | MR416i-a/4GB with Smart Storage Battery |
| Hard Drive | None included | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x16 LP | 2 PCIe: 1 x16 FH, 1 x16 LP | 2 PCIe: 1 x16 FH, 1 x16 LP |
| Power Supply | 1x 800W Titanium | 1x 800W Titanium | 1x 800W Titanium |
| Fans | 7 - High Performance | 7 - High Performance | 7 - High Performance |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Security | TPM (Trusted Platform Module) Notes: Disabled on AA1 SKUs | | |
| Rail Kit | Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Pre-Configured Models

| SKU Number | P55273-421 | P55272-421 |
|-----------------------------|--|--|
| Model Name | HPE ProLiant DL360 Gen10 Plus 4309Y 2.8GHz 8-core 1P 32GB-R MR416i-a NC 8SFF 800W PS EU Server | HPE ProLiant DL360 Gen10 Plus 4309Y 2.8GHz 8-core 1P 32GB-R S100i NC 8SFF 800W PS EU Server ⁴ |
| Chassis | 8SFF | 8SFF |
| Backplane | 8SFF x1 Tri-mode U.3 BC | 8SFF 12G x1 SAS UBM2 BC |
| Processor | 4309Y (8-Core, 2.8 GHz, 105W) ³ | 4309Y (8-Core, 2.8 GHz, 105W) ³ |
| Number of Processors | One processor with standard heatsink | One processor with standard heatsink |
| Memory | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. |
| Network Controller | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking |
| Storage Controller | MR416i-a/4GB with Smart Storage Battery | HPE SR100i Gen10 Plus FIO Software RAID/VROC SATA ⁴ |
| Hard Drive | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x16 LP | 2 PCIe: 1 x16 FH, 1 x16 LP |
| Power Supply | 1x 800W Titanium | 1x 800W Titanium |
| Fans | 7 - High Performance | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 |
| Security | TPM (Trusted Platform Module) Notes: Disabled on AA1 SKUs | |
| Rail Kit | Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | |
| Form Factor | 1U Rack | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | |

Notes:

- UEFI is the standard default for all Pre-configured models.
- ¹Supports Intel Optane Persistent Memory 200 Series, enabling up to 6TB memory per socket (does not work with SGX).
- ²5315Y 8/6/4 cores would result in 3.2/3.2/3.4 GHz operating points at 140W/125W/115W TDPs.
- ³4309Y 8/8/8 cores would result in 2.8/2.6/2.3 GHz operating points at 105W/95W/85W TDPs.
- ⁴HPE SR100i Gen10 Plus FIO Software RAID by default. VROC SATA is available and can be enabled in RBSU.

Country Code Key

- B21 = Worldwide
- 291 = Japan
- 421 = European Union
- AA1 = PRC

Notes:

- The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.
- The -421 SKU is to be ordered in European Union countries for Lot 9 compliance

Pre-Configured Models

| China Specific Models | | | |
|------------------------------|--|--|--|
| SKU Number | P40744-AA1 | P40745-AA1 | P40746-AA1 |
| Model Name | HPE ProLiant DL360 Gen10 Plus 4309Y 2.8GHz 8-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 Plus 4309Y 2.8GHz 8-core 1P 32GB-R P408i-a NC 4LFF 800W PS Server | HPE ProLiant DL360 Gen10 Plus 4310 2.1GHz 12-core 1P 32GB-R P408i-a NC 4LFF 800W PS Server |
| Chassis | 8SFF | 4LFF | 4LFF |
| Backplane | 8SFF 12G x1 SAS UBM2 BC | 4LFF 12G x1 SAS UBM2 LP | 4LFF 12G x1 SAS UBM2 LP |
| Processor | 4309Y (8-Core, 2.8 GHz, 105W) ¹ | 4309Y (8-Core, 2.8 GHz, 105W) ¹ | 4310 (12-Core, 2.1 GHz, 120W) |
| Number of Processors | One processor with standard heatsink | One processor with standard heatsink | One processor with standard heatsink |
| Memory | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. | 32 GB RDIMM 2R 3200 MT/s (1x 32 GB) & 31 DIMM blanks Notes: Runs at 2667 MT/s due to processor limitation. |
| Network Controller | Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking | Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking | Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking |
| Storage Controller | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery |
| Hard Drive | None included | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x16 LP | 2 PCIe: 1 x16 FH, 1 x16 LP | 2 PCIe: 1 x16 FH, 1 x16 LP |
| Power Supply | 1x 800W | 1x 800W | 1x 800W |
| Fans | 5 - Standard | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Security | TPM (Trusted Platform Module) Notes: Disabled on AA1 SKUs | | |
| Rail Kit | Easy Install w/o CMA | | |
| Form Factor | 1U Rack Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Notes:

- UEFI is the standard default for all Pre-configured models.
- ¹4309Y 8/8/8 cores would result in 2.8/2.6/2.3 GHz operating points at 105W/95W/85W TDPs.

Configuration Information

This section lists some of the steps required to configure a Factory Integrated Model. To ensure valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information

Step 1: Base Configuration (choose one of the following configurable models)

Network Choice (NC) Models

Network Choice models do not include embedded LOM. To enable networking capability please select a validated alternative NIC -OCP or PCIe- from the Core Options section.

| CTO Server | HPE DL360 Gen10 Plus 4 LFF NC CTO Server | HPE DL360 Gen10 Plus 8 SFF NC CTO Server |
|-----------------------|---|---|
| SKU Number | P28947-B21 | P28948-B21 |
| TAA SKU* | P28947-B21#GTA | P28948-B21#GTA |
| Processor | Not included as standard | |
| DIMM Slots | 32-DIMM slots (Up to 8 per socket can be used for Intel Optane Persistent Memory 200 Series) | |
| Storage Controller | Embedded with 14 SATA ports. | |
| PCIe | AHCI, HPE Smart Storage SR100i and Intel VROC SW RAID capable. | |
| | PCIe 4.0: 2 slots (1 x16 FH / 1 x16 LP) and 4 x8 front NVMe connectors | |
| | Optional: 1 x16 FH or LP slot | |
| Drive Cage - included | 4 LFF - 12G x1 SAS/SATA (UBM2) backplane Low Profile (LP) drive support | 8 SFF - Optional backplanes, must be selected if internal drives needed Basic carrier (BC) drive support |
| Network Controller | Choice of OCP or stand up cards Notes: No embedded networking. | |
| Fans | 5 Standard Fans Optional: High Performance Fans | |
| Management | HPE iLO with Intelligent Provisioning (standard) Optional: iLO Advanced and OneView | |
| USB | Front: 1 USB 3.0 + iLO service port Rear: 2 USB 3.0 Internal: 2 USB 3.0 Optional: 1 Front USB 2.0 (lose iLO serv. port on 4 LFF) | |
| Security | Optional TPM (Trusted Platform Module) Notes: Disabled on shipments to China | |
| Rail Kit | Optional Easy Install rails and CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | |
| Form Factor | 1U Rack | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | |

Notes:

Configuration Information

- *HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country.
- Intel® Optane Persistent Memory 200 Series is only supported on Platinum, Gold or 4314 processors.

Step 2: Choose Options

Please select one or two matching processors.

For example: for a single Xeon-Platinum 8380 processor configuration select 1x P36941-B21. If dual Xeon-Platinum 8380 processor configuration, select 2x P36941-B21

Notes:

- Mixing of 2 different processor models is not supported.
- CTO server includes 5 standard fans. Dual processor configurations require 7 fans, either standard or high performance (dependent on processor model).
- Processors with TDP equal to or greater than 150W require High Performance Heatsink (P26479-B21).
- Processors with TDP equal to or greater than 205W require High Performance Fan Kit (P26477-B21).
- Options as NVMe SSDs, 100GbE or greater NICs/HCAs, accelerators, 24G SAS drives -among others- require high performance fans.
- Processors with TDP up to 140W, or starting at 230W -both included- require DIMM blanks kit (P07818-B21).
- DIMM blanks kit (P07818-B21) recommended with processor TDPs ranging from 150W to 225W -both included- as enhance cooling.
- Each processor feeds 2 x8 front NVMe connectors, supporting up to 4 drives. Socket must populated for NVMe connectors to be usable.

Step 2a: Choose Processor Options

Processor Option Kits

SKU

3rd Generation Intel Xeon-Platinum

Notes:

- All SKUs below ship with processor only. Adequate fans and heatsinks (standard, or high performance) must be selected.
- 3200 MT/S maximum memory speed unless otherwise noted.
- 64GB SGX Enclave unless otherwise noted.

Intel Xeon-Platinum 8380 2.3GHz 40-core 270W Processor for HPE

P36941-B21

Notes:

- Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).
- 512GB SGX Enclave.

Intel Xeon-Platinum 8368 2.4GHz 38-core 270W Processor for HPE

P36940-B21

Notes:

- Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).
- 512GB SGX Enclave.

Intel Xeon-Platinum 8362 2.8GHz 32-core 265W Processor for HPE

P45418-B21

Notes:

- Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).
- Does not support Intel Speed Select Technology - Base Frequency (SST-BF).

Intel Xeon-Platinum 8360Y 2.4GHz 36-core 250W Processor for HPE

P36939-B21

Configuration Information

Notes:

- 36/32/24 cores would result in 2.4/2.5/2.6 GHz operating points at 250W/250W/220W TDPs.
- Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).

Intel Xeon-Platinum 8358P 2.6GHz 32-core 240W Processor for HPE P37598-B21

Notes:

- Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).
- 8GB SGX Enclave.

Intel Xeon-Platinum 8358 2.6GHz 32-core 250W Processor for HPE P36938-B21

Notes: Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).

Intel Xeon-Platinum 8352Y 2.2GHz 32-core 205W Processor for HPE P36929-B21

Notes:

- 32/24/16 cores would result in 2.2/2.3/2.6 GHz operating points at 205W/185W/185W TDPs.
- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Platinum 8352V 2.1GHz 36-core 195W Processor for HPE P37599-B21

Notes:

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- 36/32/24 cores would result in 2.1/2.0/2.0 GHz operating points at 195W/180W/155W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.
- 8GB SGX Enclave.

Intel Xeon-Platinum 8352S 2.2GHz 32-core 205W Processor for HPE P37613-B21

Notes:

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- 32/24/16 cores would result in 2.2/2.3/2.6 GHz operating points 205W/185W/185W TDPs.
- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 512GB SGX Enclave.

Intel Xeon-Platinum 8352M 2.3GHz 32-core 185W Processor for HPE P45414-B21

Notes:

- 32/28/24 cores would result in 2.3/2.4/2.6 GHz operating points 185W/185W/185W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- Does not support Intel Speed Select Technology - Base Frequency (SST-BF).

Intel Xeon-Platinum 8351N 2.4GHz 36-core 225W Processor for HPE P37602-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- Single socket capable even though not being a "U" processor. No dual socket support.

3rd Generation Intel Xeon-Gold

SKU

Configuration Information

Notes:

- All SKUs below ship with processor only. Adequate fans and heatsinks (standard, or high performance) must be selected.
- 3200 MT/S maximum memory speed unless otherwise noted.
- 64GB SGX Enclave unless otherwise noted.

Intel Xeon-Gold 6354 3.0GHz 18-core 205W Processor for HPE P36935-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6348 2.6GHz 28-core 235W Processor for HPE P36937-B21

Notes: Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).

Intel Xeon-Gold 6346 3.1GHz 16-core 205W Processor for HPE P36934-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6342 2.8GHz 24-core 230W Processor for HPE P36936-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6338N 2.2GHz 32-core 185W Processor for HPE P37603-B21

Notes:

- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2677 MT/s max. memory speed.

Intel Xeon-Gold 6338 2.0GHz 32-core 205W Processor for HPE P36928-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6336Y 2.4GHz 24-core 185W Processor for HPE P36926-B21

Notes:

- 24/12/8 cores would result in 2.4/2.9/3.1 GHz operating points at 185W/150W/150W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6334 3.6GHz 8-core 165W Processor for HPE P36933-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6330N 2.2GHz 28-core 165W Processor for HPE P37604-B21

Notes:

- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2667 MT/s max. memory speed.

Intel Xeon-Gold 6330 2.0GHz 28-core 205W Processor for HPE P36927-B21

Configuration Information

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

Intel Xeon-Gold 6326 2.9GHz 16-core 185W Processor for HPE

P36932-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6314U 2.3GHz 32-core 205W Processor for HPE

P37610-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6312U 2.4GHz 24-core 185W Processor for HPE

P37611-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 5320 2.2GHz 26-core 185W Processor for HPE

P36925-B21

Notes:

- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

Intel Xeon-Gold 5318Y 2.1GHz 24-core 165W Processor for HPE

P36924-B21

Notes:

- 24/24/22 cores would result in 2.1/1.9/2.0 GHz operating points at 165W/150W/150W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

Intel Xeon-Gold 5318S 2.1GHz 24-core 165W Processor for HPE

P37612-B21

Notes:

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- 24/20 cores would result in 2.1/2.0 GHz operating points at 150W/135W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

Intel Xeon-Gold 5318N 2.1GHz 24-core 150W Processor for HPE

P37605-B21

Notes:

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- 24/24/22 cores would result in 2.1/1.9/2.0 GHz operating points at 165W/150W/150W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2667 MT/s max. memory speed.

Intel Xeon-Gold 5317 3.0GHz 12-core 150W Processor for HPE

P36931-B21

Configuration Information

Notes:

- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

Intel Xeon-Gold 5315Y 3.2GHz 8-core 140W Processor for HPE

P36930-B21

Notes:

- 8/6/4 cores would result in 3.2/3.2/3.4 GHz operating points at 140W/125W/115W TDPs.
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

3rd Generation Intel Xeon-Silver**SKU****Notes:**

- All SKUs below ship with processor only. Adequate fans and heatsinks (standard, or high performance) must be selected.
- 2667 MT/S maximum memory speed.
- 8GB SGX Enclave unless otherwise noted.

Intel Xeon-Silver 4316 2.3GHz 20-core 150W Processor for HPE

P36923-B21

Notes:

- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Silver 4314 2.4GHz 16-core 135W Processor for HPE

P36922-B21

Notes:

- Requires DIMM blanks kit (P07818-B21).
- Supports Intel Optane Persistent Memory 200 Series, enabling up to 6TB memory per socket (does not work with SGX).

Intel Xeon-Silver 4310 2.1GHz 12-core 120W Processor for HPE

P36921-B21

Notes: Requires DIMM blanks kit (P07818-B21).**Intel Xeon-Silver 4309Y 2.8GHz 8-core 105W Processor for HPE**

P36920-B21

Notes:

- 8/8/8 cores would result in 2.8/2.6/2.3 GHz operating points at 105W/95W/85W TDPs.
- Requires DIMM blanks kit (P07818-B21).

Step 2b: Choose Memory Options

Please select one or more memory DIMMs from below.

For new Gen10 Plus memory population rule whitepaper and optimal memory performance guidelines, please go to:

<http://www.hpe.com/docs/memory-population-rules>For Gen10 Plus memory speed table, please go to: <https://www.hpe.com/docs/memory-speed-table>For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Plus Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: <http://www.hpe.com/docs/memory-ras-feature>.**Notes:**

- The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.
- Quantity of memory DIMMs selected per socket must be 1, 2, 4, 6, 8, 12 or 16.
- For additional information, please see the [HPE DDR4 Smart Memory QuickSpecs](#)

Registered DIMMs (RDIMMs)

Configuration Information

| | |
|---|------------|
| HPE 64GB (1x64GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit | P06035-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit | P06033-B21 |
| HPE 32GB (1x32GB) Single Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit | P40007-B21 |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit | P06031-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit | P06029-B21 |
| HPE 8GB (1x8GB) Single Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit | P07525-B21 |

Load Reduced DIMMs (LRDIMMs)

Notes: Mixing of 3DS and non-3DS DIMMs not allowed.

| | |
|--|------------|
| HPE 256GB (1x256GB) Octal Rank x4 DDR4-3200 CAS-26-22-22 Load Reduced 3DS Smart Memory Kit | P06039-B21 |
|--|------------|

Notes:

– Requires High Performance Fan Kit (P26477-B21) and DIMM blanks kit (P07818-B21).

- **Support limited to 25°C maximum inlet temperature.**

– Not supported with HPE IB HDR/EN 200Gb 2p QSFP56 OCP3 Adapter.

| | |
|---|------------|
| HPE 128GB (1x128GB) Quad Rank x4 DDR4-3200 CAS-22-22-22 Load Reduced Smart Memory Kit | P06037-B21 |
|---|------------|

HPE Persistent Memory

Notes:

– A maximum of 16 HPE Persistent Memory Kits supported on the following 3rd Generation Intel Xeon Scalable Processor series (Platinum 8300, Gold 6300 and Silver 4310).

– Supported on quantities of 1, 2, 4 or 8 per socket.

– Cannot be used with HPE 800W FlexSlot 48VDC Hot Plug Low Halogen Power Supply (865434-B21).

– For additional information regarding HPE Persistent Memory Population Rules and Guidelines for Gen10 Plus visit: <http://www.hpe.com/docs/memory-population-rules>

| | |
|---|------------|
| Intel Optane 512GB persistent memory 200 Series for HPE | P23538-B21 |
|---|------------|

Notes: Requires High Performance Fan Kit (P26477-B21) and DIMM blanks kit (P07818-B21).

| | |
|---|------------|
| Intel Optane 128GB persistent memory 200 Series for HPE | P23532-B21 |
|---|------------|

HPE DIMM blanks

| | |
|-------------------------|------------|
| HPE DDR4 DIMM Blank Kit | P07818-B21 |
|-------------------------|------------|

Notes:

– Required by processors with TDP up to 140W, or starting at 230W (both included).

– Recommended with processor TDPs ranging from 150W to 225W -both included- as enhance cooling.

Step 2c: Choose Power Supplies

Please select one or two power supplies from below.

Notes: Mixing of 2 different power supplies is NOT supported.

HPE Flex Slot Power Supplies

| | |
|---|------------|
| HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 865408-B21 |
|---|------------|

| | |
|---|------------|
| HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit | 865438-B21 |
|---|------------|

Notes: Only supports high line voltage (200 VAC to 240 VAC).

| | |
|---|------------|
| HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | P38995-B21 |
|---|------------|

| | |
|---|------------|
| HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit | 865434-B21 |
|---|------------|

| | |
|--|------------|
| HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit | 865428-B21 |
|--|------------|

| | |
|--|------------|
| HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | P38997-B21 |
|--|------------|

Configuration Information

Notes: Only supports high line voltage (200 VAC to 240 VAC).

Step 2d: Choose backplane (8 SFF server only)

If front drives are needed in the 8 SFF server, please select one backplane from list below.

Notes: No optional backplanes available for LFF models, 4-bay 12G x1 SAS/SATA already included with server.

HPE DL360 Gen10 Plus Basic Carrier (BC) drive backplanes

Notes

– For all backplanes below:

- o Supports Basic Carrier Drives.
- o Includes cabling.

HPE ProLiant DL360 Gen10 Plus 8SFF SAS/SATA 12G BC Backplane Kit

P26427-B21

Notes:

- Supports SAS and SATA Basic Carrier (BC) drives.
- UBM2.
- Can be connected to Broadcom Tri-mode controllers when using the following Tri-mode to SAS/SATA cables:

o HPE DL36x G10+ 8SFF SAS/SATA TM Cbl Kit P55882-B21

o HPE DL36x G10+ 2SFF SAS/SATA TM Cbl Kit P55883-B21

HPE ProLiant DL360 Gen10 Plus 8SFF x1 Tri-Mode 24G U.3 BC Backplane Kit

P26431-B21

Notes:

- Supports SATA, SAS and NVMe Basic Carrier (BC) drives.
- NVMe SSDs must be U.3.
- Requires High Performance Fan Kit (P26477-B21).
- No NVMe Direct Attach support.
- Not supported with SR932i-p Tri-Mode controller.
- Can't be connected to Smart Array (SAS/SATA) controllers or embedded SATA ports.
- UBM3.

HPE ProLiant DL360 Gen10 Plus 8SFF x4 Tri-Mode 24G U.3 BC Backplane Kit

P26429-B21

Notes:

- Supports SATA, SAS and NVMe Basic Carrier (BC) drives.
- NVMe SSDs must be U.3.
- Requires High Performance Fan Kit (P26477-B21).
- Supports NVMe Direct Access and slotted Tri-Mode controllers.
- Includes Direct Access cables.
- Requires 8 SFF cable (P26451-B21) for Tri-Mode controllers.
- Can't be connected to Smart Array (SAS/SATA) controllers, nor to embedded SATA ports.
- UBM3.

HPE ProLiant DL360 Gen10 Plus 8SFF x4 NVMe 16G U.2 BC Backplane Kit

P26433-B21

Notes:

- Supports NVMe (U.2 and non-static U.3) Basic Carrier (BC) SSDs.
- Requires High Performance Fan Kit (P26477-B21).
- Supports NVMe Direct Access and SR932i-p Tri-Mode controller.

Configuration Information

- Includes Direct Access cables.
- Requires 8 SFF cable (P26451-B21) for SR932i-p Tri-Mode controller.
- Does not support HPE Smart Storage SR100i SR Gen10 Plus SW RAID.
- Maximum of 8 U.2 drives per controller.
- Can't be connected to Smart Array (SAS/SATA) controllers or embedded SATA ports.
- UBM4.

Step 3: Choose Additional (FIO) Factory Integratable Options

Each of the following may be selected if desired at time of factory integration

HPE Gen10 TPM 1.2 FIO Setting 872108-B21

Notes: TPM 2.0 is set as default, for 1.2 TPM setting instead, please select this option.

HPE Legacy FIO Mode Setting 758959-B22

Notes: UEFI is the default, this FIO part can be used for CTO to enable Legacy mode.

HPE ProLiant DL360 Gen10 Plus Direct Attach Full NVMe FIO Trigger System Setting P26445-B21

Notes: Instructs HPE Configurator to prepopulate 8+2 SFF NVMe capable backplanes, high-performance fan kit and primary NVMe riser as defaults.

HPE Smart Memory Fast Fault Tolerance FIO Setting 875293-B21

Notes:

Enables Fast Fault Tolerance mode, an HPE Memory RAS feature introduced in HPE Gen10 servers that survives up to two DRAM failures.

This RAS feature combines Adaptive Double DRAM Device Correction (ADDC) with HPE Advanced Error Detection Technology, resultin in significantly better memory reliability and availability that what ADDDC provides on its own. For more information see our [**Memory RAS feature technical whitepaper**](#).

HPE 12 DIMM SNC2 Hemi SGX FIO Enablement Kit P26933-B21

Notes:

Instructs factory to populate 12 DIMMs/socket in the optimal way required by Sub-NUMA Clustering (SNC).

Only applicable to 12 DIMM/socket counts.

For supported 8 DIMM, 12 DIMM, and 16 DIMM SGX memory population configuration please see page 4 of the guide: [**Server Memory and Persistent Memory population rules for HPE Gen10 Plus servers with 3rd Gen Intel Xeon Scalable processors**](#)

Configuration Information

| | |
|---------------------------------|------------|
| HPE Server Identity FIO Setting | P41905-B21 |
|---------------------------------|------------|

Notes: Initial Device Identity (IDevID) certificates are part of a Zero Trust Architecture. This SKU instructs factory to provision IdevID on HPE iLO.

| | |
|--|------------|
| HPE ProLiant Platform Certificate and IDevID iLO FIO Setting | P42104-B21 |
|--|------------|

Notes:

Directs HPE manufacturing site to create, digitally sign and store a platform certificate on the server.

Requires HPE Trusted Platform Module (TPM).

| | |
|---|------------|
| HPE ProLiant DL300 Gen10 Plus Platform RAS OS Control FIO Setting | P27078-B21 |
|---|------------|

Notes:

Firmware first is ProLiant servers BIOS default selection. In this mode monitoring functionality built into the design of the server is first on the scene of correctable problems to determine quickly and accurately what's wrong and how to fix it. Firmware first enables many platform-specific actions for errors including predictive fault analysis. This technology functions independently of the operating system and does not depend on O/S-based tools.

This SKU instructs factories to enable O/S first mode, a BIOS switch that allows experienced customers to have the operating system handle correctable hardware errors. On this mode, more errors could be observed, including soft ones that do not necessarily indicate issues with the component or cause warranty replacement.

HPE Security Options

HPE Server Security Optimized Service for HPE ProLiant (R9S59A) is an optional security upgrade intended for agencies and regulated industries with enhanced security and compliance needs. Applying this option to a DL3XX Gen10/Gen10 Plus CTO server ensures it is hardened by turning on advanced safeguards in place against cyber-exploits throughout the server lifecycle. An iLO Advanced License required for High Security Mode and compatible intrusion detection device option kits are prerequisites for the full optimization service.

Step 4: Choose Additional Options for Factory Integration from Core and Additional Option sections below

| | |
|--|--------|
| HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU | E5Y43A |
|--|--------|

| | |
|---|--------|
| HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU | P8B31A |
|---|--------|

Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Unique Options

Risers

HPE ProLiant DL36X Gen10 Plus x16/x8 PCIe M.2 NS204i-r Riser Kit P26463-B21

Notes:

- M.2 media not included, 22110 capable.
- Requires High Performance Fan Kit (P26477-B21).

HPE ProLiant DL36X Gen10 Plus 8SFF 2NVMe CPU1 Riser Kit P26465-B21

Notes:This kit is not available on the 4 LFF model.

HPE ProLiant DL36X Gen10 Plus Low Profile Riser Kit P26471-B21

HPE ProLiant DL36X Gen10 Plus Full Height Riser Kit P26467-B21

| Riser Information ^{***} | | | | | | | | | | |
|----------------------------------|--|----------------|------|-----------------------------|------------------|-----|------------------|---------------------|----------|--------------|
| Part number | Description | Riser position | | Slot Bus width (Gen4 lanes) | | | GPU Support | NVMe Direct Connect | | M.2 Connect. |
| | | Prim. | Sec. | #1 | #2 | #3 | | Connectors | Max SSDs | N/A |
| N/A | HPE DL360 Gen10 Plus x16/x16 Primary GPU Riser | D | N/A | x16 | x16 | N/A | Y | N/A | N/A | N/A |
| P26463-B21 | HPE DL36X G10 Plus x16/x8 2x M.2 NS204i-r Primary Riser ^{1,2,3} | O | N/A | x16 | x8 | N/A | Y ^{6,7} | N/A | N/A | 2 |
| P26465-B21 | HPE DL36X G10 Plus 8 SFF x16/x8 2NVMe Primary Riser ⁴ | O | N/A | x16 | x8 | N/A | Y ⁷ | 1 | 2 | N/A |
| P26467-B21 | HPE DL36x Gen10 Plus x16 FH GPU Secondary Riser Kit ⁵ | N/A | O | N/A | N/A ⁵ | x16 | Y | N/A | N/A | N/A |
| P50027-B21 | HPE ProLiant DL36X Gen10 Plus x16 FH GPU Secondary Riser Power Cable v2 Kit ⁵ | N/A | O | N/A | N/A ⁵ | X16 | Y | N/A | N/A | N/A |
| P26471-B21 | HPE DL360 Gen10 Plus x16 LP Secondary Riser Kit | N/A | O | N/A | N/A | x16 | Y ⁶ | N/A | N/A | N/A |

Notes:

- D = Default on server; O = Optional; N = not supported or slot/connector not present.
- ¹Supports 2x 22110 M.2 media, not included.
- ²Provides HW RAID 1 capabilities utilizing inbox Windows, Linux or VMware drivers.
- ³Requires High Performance Fan Kit (P26477-B21).
- ⁴Not supported on 4 LFF models.
- ⁵When secondary full height kit is installed, then primary PCIe Slot #2 cannot be used. Only 2 full height slots are supported.

Additional Options

- A ^{Max Qty=1} of the following list of Secondary riser options is allowed per server. This means that only one item can be selected from the following list:
 - HPE DL36x Gen10+ 2P FH Riser Kit (P26467-B21)
 - HPE DL36x Gen10+ LP Riser Kit (P26471-B21)
 - HPE ProLiant DL36X Gen10 Plus x16 FH GPU Secondary Riser Power Cable v2 Kit (P50027-B21)
- Requires the selection of a 2nd Processor
- **IMPORTANT!!!** With the installation of this option into the server, you will lose physical access to the PCIe Slot 2 that is located on the Default / Primary Riser. The "PCIe Card Capacity Limits" must account for this reduction of PCIe slots.
- ⁶GPU max 75W
- ⁷Slot 1 only, no slot 2 support
- *For additional details on ProLiant DL Gen10 Plus server risers. Please visit:
<https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw>

Cooling Options

| | |
|--|------------|
| HPE ProLiant DL360 Gen10 Plus Standard Heat Sink Kit | P37863-B21 |
| HPE ProLiant DL360 Gen10 Plus High Performance Heat Sink Kit | P26479-B21 |

Notes: Required for processors with a TDP equal or greater than 150W.

| | |
|--|------------|
| HPE ProLiant DL36X Gen10 Plus Standard Fan Kit | P37861-B21 |
|--|------------|

Notes:

- Includes 2 fans, complements base server default (5) to system max. of 7 required by 2P configs.
- Supports processors with a TDP equal or lower than 195W.

| | |
|--|------------|
| HPE ProLiant DL36X Gen10 Plus High Performance Fan Kit | P26477-B21 |
|--|------------|

Notes:

- Includes 7 fans, required by processors with a TDP equal or greater than 205W, and select options.
- Required for Extended Ambient Operating Support.

| | |
|-------------------------|------------|
| HPE DDR4 DIMM Blank Kit | P07818-B21 |
|-------------------------|------------|

Notes:

- Instructs factory to install blanks on unused DIMM slots. Max. 1 kit per system.
- Required by processors with TDP up to 140W, or starting at 230W (both included).
- Recommended with processor TDPs ranging from 150W to 225W -both included- as enhance cooling.

Additional Options

| Cooling options summary | | | | |
|-------------------------|--|--|--|--|
| CPU TDP (Watts) | 85W - 140W¹ | 150W - 195W¹ | 205W - 225W¹ | 230W - 270W¹ |
| Heatsink | Standard (P37863-B21) | High Performance ⁴ (P26479-B21) | High Performance ⁴ (P26479-B21) | High Performance ⁴ (P26479-B21) |
| Fans | Standard ² (5 included on base server, P37861-B21 for 2P configs) | Standard ² (5 included on base server, P37861-B21 for 2P configs) | High Performance ⁴ (P26477-B21) | High Performance ⁴ (P26477-B21) |
| DIMM blanks | Required ⁴ (P07818-B21) | Recommended ³ (P07818-B21) | Recommended ³ (P07818-B21) | Required ⁴ (P07818-B21) |

Notes:

- ¹Both minimum and maximum limits included (e.g greater or equal to, and up to including).
- ²CPU TDP driven. Options as NVMe SSDs, 100GbE or greater NICs/HCAs, accelerators or 24G SAS drives - among others- require high performance fans.
- ³Recommended with processor TDPs ranging from 185W to 225W -both included- as enhance cooling.
- ⁴Required.

Universal Media Bay Options

HPE ProLiant DL360 Gen10 Plus 2SFF SAS/SATA 12G BC Drive Cage Kit

P26435-B21

Notes:

- Supports SAS and SATA Basic Carrier (BC) Drives.
- Requires an 8 SFF backplane (12G x1 SAS/SATA, 24G Tri-Mode, or 16G x4 NVMe).
- Includes cabling.
- Can't be connected to Tri-Mode controllers.
- UBM2.

HPE ProLiant DL360 Gen10 Plus 2SFF x4 Tri-Mode 24G U.3 BC Drive Cage Kit

P26437-B21

Notes:

- Supports SAS, SATA and NVMe Basic Carrier (BC) Drives.
- Requires an 8 SFF backplane (12G x1 SAS/SATA, 24G x1 Tri-Mode or 24G x4 Tri-Mode).
- Cannot be mixed with 8SFF 16G x4 NVMe U.2 backplane (P26433-B21).
- Includes Direct Access cables.
- NVMe SSDs must be U.3.
- Requires High Performance Fan Kit (P26477-B21).
- Supports NVMe Direct Access and Tri-Mode controllers.
- Requires 2 SFF cable (P36657-B21) for Tri-Mode controllers.
- Can't be connected to Smart Array (SAS/SATA) controllers or embedded SATA ports.
- UBM3.

HPE ProLiant DL360 Gen10 Plus 2SFF x4 NVMe 16G U.2 BC Drive Cage Kit

P26439-B21

Notes:

- Supports NVMe (U.2 and non-static U.3) Basic Carrier (BC) SSDs.
- Requires an 8 SFF backplane (12G x1 SAS/SATA or 16G x4 NVMe).
- Cannot be mixed with U.3 backplanes (P26429-B21 or P26431-B21).
- Includes Direct Access cables
- Requires High Performance Fan Kit (P26477-B21).

Additional Options

- Supports NVMe Direct Access and Tri-Mode controllers.
- Requires 2 SFF cable (P36657-B21) for Tri-Mode controllers.
- UBM4.

HPE ProLiant DL360 Gen10 Plus 8SFF Display Port/USB/Optical Drive Blank Kit P40003-B21

Notes: This kit is required for Optical Drive option (8 SFF model only).

HPE ProLiant DL360 Gen10 Plus LFF Display Port/USB Kit P26455-B21

Optical Drive Options

HPE Mobile USB DVD-RW Optical Drive 701498-B21

Notes: This kit is supported on USB 3.0 ports only.

HPE 9.5mm SATA DVD-ROM Optical Drive 726536-B21

Notes:

- Requires Universal Media Bay Kit (P40003-B21) to install on 8 SFF models.
- Requires cable for optical drive (P26459-B21) to install on 4 LFF models.

HPE 9.5mm SATA DVD-RW Optical Drive 726537-B21

Notes:

- Requires Universal Media Bay Kit (P40003-B21) to install on 8 SFF models.
- Requires cable for optical drive (P26459-B21) to install on 4 LFF models.

HPE ProLiant DL360 Gen10 Plus LFF Optical Cable P26459-B21

System Insight Display Options

HPE ProLiant DL360 Gen10 Plus SFF System Insight Display Power Module Kit P26447-B21

Notes: Removes iLO Service Port.

HPE ProLiant DL360 Gen10 Plus LFF System Insight Display Power Module Kit P26457-B21

Notes: Removes iLO Service Port.

Security

HPE Trusted Platform Module 2.0 Gen10 Plus Black Rivets Kit P13771-B21

HPE Gen10 Plus Chassis Intrusion Detection Kit P14604-B21

HPE 1U Gen10 Bezel Kit 867998-B21

HPE Bezel Lock Kit 875519-B21

Notes: Requires Bezel Kit (867998-B21).

HPE Processors

Please select one or two matching processors.

For example: for a single Xeon-Platinum 8380 processor configuration select 1x P36941-B21. If dual Xeon-Platinum 8380 processor configuration, select 2x P36941-B21

Notes:

- Mixing of 2 different processor models is not supported.
- CTO server includes 5 standard fans. Dual processor configurations require 7 fans, either standard or high

Additional Options

- performance (dependent on processor model).
- Processors with TDP equal to or greater than 150W require High Performance Heatsink (P26479-B21).
- Processors with TDP equal to or greater than 205W require High Performance Fan Kit (P26477-B21).
- Options as NVMe SSDs, 100GbE or greater NICs/HCAs, accelerators, 24G SAS drives -among others- require high performance fans.
- Processors with TDP up to 140W, or starting at 230W -both included- require DIMM blanks kit (P07818-B21).
- DIMM blanks kit (P07818-B21) recommended with processor TDPs ranging from 185W to 225W -both included- as enhance cooling.
- Each processor feeds 2 x8 front NVMe connectors, supporting up to 4 drives. Socket must populated for NVMe connectors to be usable.

3rd Generation Intel Xeon-Platinum

Notes:

- All SKUs below ship with processor only. Adequate fans and heatsinks (standard, or high performance) must be selected.
- 3200 MT/S maximum memory speed unless otherwise noted.
- 64GB SGX Enclave unless otherwise noted.

Intel Xeon-Platinum 8380 2.3GHz 40-core 270W Processor for HPE P36941-B21

Notes:

- Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).
- 512GB SGX Enclave.

Intel Xeon-Platinum 8368 2.4GHz 38-core 270W Processor for HPE P36940-B21

Notes:

- Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).
- 512GB SGX Enclave.

Intel Xeon-Platinum 8362 2.8GHz 32-core 265W Processor for HPE P45418-B21

Notes:

- Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).
- Does not support Intel Speed Select Technology - Base Frequency (SST-BF).

Intel Xeon-Platinum 8360Y 2.4GHz 36-core 250W Processor for HPE P36939-B21

Notes:

- 36/32/24 cores would result in 2.4/2.5/2.6 GHz operating points at 250W/250W/220W TDPs.
- Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).

Intel Xeon-Platinum 8358P 2.6GHz 32-core 240W Processor for HPE P37598-B21

Notes:

- Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).
- 8GB SGX Enclave.

Intel Xeon-Platinum 8358 2.6GHz 32-core 250W Processor for HPE P36938-B21

Notes: Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).

Intel Xeon-Platinum 8352Y 2.2GHz 32-core 205W Processor for HPE P36929-B21

Notes:

- 32/24/16 cores would result in 2.2/2.3/2.6 GHz operating points at 205W/185W/185W TDPs.
- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Additional Options

Intel Xeon-Platinum 8352V 2.1GHz 36-core 195W Processor for HPE P37599-B21

Notes:

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- 36/32/24 cores would result in 2.1/2.0/2.0 GHz operating points at 195W/180W/155W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.
- 8GB SGX Enclave.

Intel Xeon-Platinum 8352S 2.2GHz 32-core 205W Processor for HPE P37613-B21

Notes:

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- 32/24/16 cores would result in 2.2/2.3/2.6 GHz operating points 205W/185W/185W TDPs.
- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 512GB SGX Enclave.

Intel Xeon-Platinum 8352M 2.3GHz 32-core 185W Processor for HPE P45414-B21

Notes:

- 32/28/24 cores would result in 2.3/2.4/2.6 GHz operating points 185W/185W/185W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- Does not support Intel Speed Select Technology - Base Frequency (SST-BF).

Intel Xeon-Platinum 8351N 2.4GHz 36-core 225W Processor for HPE P37602-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- Single socket capable even though not being a "U" processor. No dual socket support.

3rd Generation Intel Xeon-Gold**Notes:**

- All SKUs below ship with processor only. Adequate fans and heatsinks (standard, or high performance) must be selected.
- 3200 MT/S maximum memory speed unless otherwise noted.
- 64GB SGX Enclave unless otherwise noted.

Intel Xeon-Gold 6354 3.0GHz 18-core 205W Processor for HPE P36935-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6348 2.6GHz 28-core 235W Processor for HPE P36937-B21

Notes: Requires High Performance Heatsink (P26479-B21), Fans (P26477-B21) and DIMM blanks kit (P07818-B21).

Intel Xeon-Gold 6346 3.1GHz 16-core 205W Processor for HPE P36934-B21

Additional Options

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6342 2.8GHz 24-core 230W Processor for HPE P36936-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6338N 2.2GHz 32-core 185W Processor for HPE P37603-B21

Notes:

- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2677 MT/s max. memory speed.

Intel Xeon-Gold 6338 2.0GHz 32-core 205W Processor for HPE P36928-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6336Y 2.4GHz 24-core 185W Processor for HPE P36926-B21

Notes:

- 24/12/8 cores would result in 2.4/2.9/3.1 GHz operating points at 185W/150W/150W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6334 3.6GHz 8-core 165W Processor for HPE P36933-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6330N 2.2GHz 28-core 165W Processor for HPE P37604-B21

Notes:

- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2667 MT/s max. memory speed.

Intel Xeon-Gold 6330 2.0GHz 28-core 205W Processor for HPE P36927-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

Intel Xeon-Gold 6326 2.9GHz 16-core 185W Processor for HPE P36932-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6314U 2.3GHz 32-core 205W Processor for HPE P37610-B21

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 6312U 2.4GHz 24-core 185W Processor for HPE P37611-B21

Additional Options

Notes:

- Requires High Performance Heatsink (P26479-B21) and Fans (P26477-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Gold 5320 2.2GHz 26-core 185W Processor for HPE

P36925-B21

Notes:

- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

Intel Xeon-Gold 5318Y 2.1GHz 24-core 165W Processor for HPE

P36924-B21

Notes:

- 24/24/22 cores would result in 2.1/1.9/2.0 GHz operating points at 165W/150W/150W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

Intel Xeon-Gold 5318S 2.1GHz 24-core 165W Processor for HPE

P37612-B21

Notes:

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- 24/20 cores would result in 2.1/2.0 GHz operating points at 150W/135W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

Intel Xeon-Gold 5318N 2.1GHz 24-core 150W Processor for HPE

P37605-B21

Notes:

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- 24/24/22 cores would result in 2.1/1.9/2.0 GHz operating points at 165W/150W/150W TDPs.
- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2667 MT/s max. memory speed.

Intel Xeon-Gold 5317 3.0GHz 12-core 150W Processor for HPE

P36931-B21

Notes:

- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

Intel Xeon-Gold 5315Y 3.2GHz 8-core 140W Processor for HPE

P36930-B21

Notes:

- 8/6/4 cores would result in 3.2/3.2/3.4 GHz operating points at 140W/125W/115W TDPs.
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.
- 2933 MT/s max. memory speed.

3rd Generation Intel Xeon-Silver

Notes:

- All SKUs below ship with processor only. Adequate fans and heatsinks (standard, or high performance) must be selected.
- 2667 MT/S maximum memory speed.
- 8GB SGX Enclave unless otherwise noted.

Additional Options

Intel Xeon-Silver 4316 2.3GHz 20-core 150W Processor for HPE P36923-B21

Notes:

- Requires High Performance Heatsink (P26479-B21).
- DIMM blanks kit (P07818-B21) recommended as enhance cooling.

Intel Xeon-Silver 4314 2.4GHz 16-core 135W Processor for HPE P36922-B21

Notes:

- Requires DIMM blanks kit (P07818-B21).
- Supports Intel Optane Persistent Memory 200 Series, enabling up to 6TB memory per socket (does not work with SGX).

Intel Xeon-Silver 4310 2.1GHz 12-core 120W Processor for HPE P36921-B21

Notes: Requires DIMM blanks kit (P07818-B21).

Intel Xeon-Silver 4309Y 2.8GHz 8-core 105W Processor for HPE P36920-B21

Notes:

- 8/8/8 cores would result in 2.8/2.6/2.3 GHz operating points at 105W/95W/85W TDPs.
- Requires DIMM blanks kit (P07818-B21).

HPE Memory

Please select one or more memory DIMMs from below.

For new Gen10 Plus memory population rule whitepaper and optimal memory performance guidelines, please go to:

<http://www.hpe.com/docs/memory-population-rules>

For Gen10 Plus memory speed table, please go to: <https://www.hpe.com/docs/memory-speed-table>

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Plus Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: <http://www.hpe.com/docs/memory-ras-feature>.

Notes:

- The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.
- Quantity of memory DIMMs selected per socket must be 1, 2, 4, 6, 8, 12 or 16.
- For additional information, please see the [HPE DDR4 Smart Memory QuickSpecs](#)

HPE DDR4 Memory

Notes: DIMMs must be selected in quantities of 1, 2, 4, 6, 8, 12 or 16 per socket.

Registered DIMMs (RDIMMs)

HPE 64GB (1x64GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit P06035-B21

HPE 32GB (1x32GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit P06033-B21

HPE 32GB (1x32GB) Single Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit P40007-B21

HPE 16GB (1x16GB) Dual Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit P06031-B21

HPE 16GB (1x16GB) Single Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit P06029-B21

HPE 8GB (1x8GB) Single Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit P07525-B21

Load Reduced DIMMs (LRDIMMs)

Notes: Mixing of 3DS and non-3DS DIMMs not allowed.

Additional Options

HPE 256GB (1x256GB) Octal Rank x4 DDR4-3200 CAS-26-22-22 Load Reduced 3DS Smart Memory Kit P06039-B21

Notes:

- Requires DIMM blanks kit (P07818-B21).
- Support limited to 25°C maximum inlet temperature.
- Not supported with HPE IB HDR/EN 200Gb 2p QSFP56 OCP3 Adapter.

HPE 128GB (1x128GB) Quad Rank x4 DDR4-3200 CAS-22-22-22 Load Reduced Smart Memory Kit P06037-B21

HPE Persistent Memory

Notes:

- A maximum of 8 HPE Persistent Memory Kits per socket are supported on the following 3rd Generation Intel Xeon Scalable Processor series (Platinum 8300, Gold 6300 or 4314).
- Supported on quantities of 1, 2, 4 or 8 per socket.
- Cannot be used with HPE 800W FlexSlot 48VDC Hot Plug Low Halogen Power Supply (865434-B21).
- For additional information regarding HPE Persistent Memory Population Rules and Guidelines for Gen10 Plus visit: <http://www.hpe.com/docs/memory-population-rules>

Intel Optane 512GB persistent memory 200 Series for HPE P23538-B21

Notes: Requires High Performance Fan Kit (P26477-B21) and DIMM blanks kit (P07818-B21).

Intel Optane 128GB persistent memory 200 Series for HPE P23532-B21

HPE DIMM blanks

HPE DDR4 DIMM Blank Kit P07818-B21

Notes:

- Kit includes enough blanks for one server.
- Required by processors with TDP up to 140W, or starting at 230W (both included).
- Recommended with processor TDPs ranging from 185W to 225W -both included- as enhance cooling.

HPE Boot Controllers

HPE NS204i-p x2 Lanes NVMe PCIe3 x8 OS Boot Device P12965-B21

Notes: Requires High Performance Fan Kit (P26477-B21).

HPE Storage Controllers

Notes: For additional details, please see [HPE Smart Array Gen10 Plus Controllers QuickSpecs: HPE MegaRAID Storage Controllers](#) and [HPE SmartRAID Storage Controllers](#)

HPE Flexible Smart Array Controllers

Notes: None of the cards below can be used in conjunction with the OCP x16 Enablement Kit (P36661-B21) or the Smart Array-NVMe Adapter Kit (P38585-B21).

HPE Smart Array P816i-a SR Gen10 (16 Internal Lanes/4GB Cache/SmartCache) 12G SAS Modular Controller 804338-B21

HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular Controller 804331-B21

HPE Smart Array P816i-a SR Gen10 (16 Int Lanes/4GB Cache/SmartCache) 12G SAS Modular LH Controller 869083-B21

Additional Options

HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular LH Controller 869081-B21

HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular LH Controller 869079-B21

HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular Controller 804326-B21

Notes: The Low Height (LH) controller is required when a PCIe card that exceeds half-length is used in slots 2 or 3.

HPE Flexible Tri-Mode Array Controllers

Notes:

– For all cards below:

- o SR series and MR series Tri Mode controllers cannot be mixed in same configuration.
- o If selected along a 2 SFF x4 U.3 or x4 U.2 backplane, the 2 SFF Tri-Mode Cable (P36657-B21) is required
- o Cannot be used in conjunction with the OCP x16 Enablement Kit (P36661-B21) or the Smart Array-NVMe Adapter Kit (P38585-B21).

Microchip SmartRAID SR416i-a x16 Lanes 4GB Cache NVMe/SAS 24G Controller for HPE Gen10 Plus P12688-B21

Broadcom MegaRAID MR416i-a x16 Lanes 4GB Cache NVMe/SAS 12G Controller for HPE Gen10 Plus P26279-B21

Broadcom MegaRAID MR216i-a x16 Lanes without Cache NVMe/SAS 12G Controller for HPE Gen10 Plus P26325-B21

Broadcom MegaRAID MR216i-p x16 Lanes without Cache NVMe/SAS 12G Controller for HPE Gen10 Plus P26324-B21

Broadcom MegaRAID MR416i-p x16 Lanes 4GB Cache NVMe/SAS 12G Controller for HPE Gen10 Plus P06367-B21

HPE Flexible NVMe Adapters

HPE ProLiant DL365 Gen10 Plus Smart Array to NVMe Adapter Kit P38585-B21

Notes:

- Provides x8 PCIe 4.0 lanes to a 2SFF NVMe cage, recovering from unused AROC connector on configurations without Flexible Storage controllers.
- Cannot be used in conjunction with the OCP x16 Enablement kit, NVMe riser, or Flexible Storage Controllers.
- This kit is not available on the 4 LFF model.

HPE Smart Array Controllers

HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller 804405-B21

HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller 830824-B21

Notes:

- Not supported on slot 3.
- Requires internal cable kit (SFF: P26449-B21 / LFF: P26461-B21) if installed in slot 2.

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller 804398-B21

HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller 804394-B21

Additional Options

Notes:

- Not supported on slot 3.
- Requires internal cable kit (SFF: P26449-B21 / LFF: P26461-B21) if installed in slot 2.

Tri-Mode Array Controllers

Notes

- For all cards below:
 - o Only supported on slot 1.
 - o SR series and MR series Tri Mode controllers cannot be mixed in a same configuration.
 - o If selected along an 8 SFF U.3 or U.2 backplane, the 8 SFF Tri-Mode Cable (P26451-B21) is required.
 - o If selected along an 2 SFF U.3 or U.2 backplane, the 2 SFF Tri-Mode Cable (P36657-B21) may be required.

Microchip SmartRAID SR932i-p x32 Lanes 8GB Wide Cache NVMe/SAS 24G Controller for HPE Gen10 Plus P04220-B21

Notes: When used in conjunction with the Smart Hybrid Capacitor (P02377-B21), additional 4xx or 8xx storage controllers will be limited to a maximum of one. If more than two controllers are needed on the server, the Smart Storage battery (P01366-B21) must be used.

Broadcom MegaRAID MR416i-p x16 Lanes 4GB Cache NVMe/SAS 12G Controller for HPE Gen10 Plus P06367-B21

Broadcom MegaRAID MR216i-p x16 Lanes without Cache NVMe/SAS 12G Controller for HPE Gen10 Plus P26324-B21

HPE Energy Packs

HPE 96W Smart Storage Lithium-ion Battery with 145mm Cable Kit P01366-B21

Notes: Supports up to 6 storage controllers.

HPE Smart Storage Hybrid Capacitor with 145mm Cable Kit P02377-B21

Notes: Supports up to 3 storage controllers (except SR932i-p, which limits system at 2 controllers max).

Software RAID

HPE SR100i Gen10 Plus FIO Software RAID P28417-B21

Notes:

- Requires UEFI, not supported on Legacy Mode.
- Maximum of 2 NVMe SSDs, which must be connected to NVMe ports embedded on system board.
- Supports Microsoft Windows Server only.
- For Linux users, HPE offers a solution that uses in-distro open-source software to create a two-disk RAID 1 boot volume. For more information visit: <https://downloads.linux.hpe.com/SDR/project/lsrrb/>

Intel VROC NVMe FIO SW for HPE R7J58A

Notes:

- Requires UEFI, not supported on Legacy Mode.
- Supported only with NVMe U.2 P4xxx SSDs.
- For NVMe SSDs only, no PCIe card support.
- Can't be selected along Factory RAID settings.

Additional Options

Intel Virtual RAID on CPU Premium FIO Software for HPE R7J57A

Notes:

- Requires UEFI, not supported on Legacy Mode.
- For NVMe SSDs only, no PCIe card support.
- Can't be selected along Factory RAID settings.

Intel Virtual RAID on CPU Premium E-RTU for HPE R7J59AAE

Notes:

- Requires UEFI, not supported on Legacy Mode.
- Supported only with NVMe U.2 P4xxx SSDs.
- For NVMe SSDs only, no PCIe card support.
- Similar to Intel VROC NVMe FIO SW for HPE (R7J58A), but intended for field deployments (BTO).

Intel Virtual RAID on CPU Software E-RTU for HPE ProLiant DL360/380 Gen10 Plus with Intel SSDs R7J60AAE

Notes:

- Requires UEFI, not supported on Legacy Mode.
- For NVMe SSDs only, no PCIe card support.
- Similar to Intel VROC NVMe Premium FIO SW for HPE (R7J57A), but intended for field deployments (BTO).

Cable Kits

HPE ProLiant DL36x Gen10 Plus 8SFF SAS/SATA Tri-Mode Cable Kit P55882-B21

Notes:

- Max = 1 of 8SFF SAS/SATA tri-mode cable kit or SFF internal cable kit can be selected.
- When 8SFF SAS/SATA drive cage is selected along with Trimode controllers (MR216i or MR416i) then 8SFF SAS/SATA tri-mode cable kit must be selected.
- 8SFF SAS/SATA tri-mode cable kit is not required if Direct attached or Embedded Controller is selected.

HPE ProLiant DL36x Gen10 Plus 2SFF SAS/SATA Tri-Mode Cable Kit P55883-B21

Notes:

- Max = 1 of 2SFF SAS/SATA tri-mode cable kit can be selected.
- When 2SFF SAS/SATA drive cage is selected along with Trimode controllers (MR216i or MR416i) then 2SFF SAS/SATA tri-mode cable kit must be selected.
- 2SFF SAS/SATA tri-mode cable kit is not required if Direct attached or Embedded Controller is selected.

HPE ProLiant DL36x Gen10 Plus 8SFF SAS/SATA PCIe Slot2 Tri-Mode Cable Kit P55884-B21

Notes:

- Max = 1 of 8SFF SAS/SATA tri-mode cable kit or SFF internal cable kit can be selected.
- When 8SFF SAS/SATA drive cage is selected with P series PCIe Trimode controllers (MR216i-p or MR416i-p) along with GPU or NS204i-p NVMe PCIe3 OS Boot Device or HPE Universal SATA AIC HHHL M.2 SSD Kit or 4P SFP / 4P BASE-T Adptr (Networking) to mount on Primary Riser, then 8SFF P2 Trimode cbl kit must be selected.

HPE ProLiant DL360 Gen10 Plus 4LFF SAS/SATA Tri-Mode Cable Kit P55885-B21

Additional Options

Notes:

Max = 1

LFF internal cable kit & 4LFF tri-mode cable kit cannot be selected together

When 4LFF Model-X is selected along with tri-mode controllers (MR216i or MR416i) then 4LFF tri-mode cable kit must be selected.

HPE ProLiant DL360 Gen10 Plus SFF Internal Cable Kit P26449-B21

Notes: Required to install SAS/SATA storage controller on slot 2.

HPE ProLiant DL360 Gen10 Plus LFF Internal Cable Kit P26461-B21

Notes: Required to install SAS/SATA storage controller on slot 2.

HPE ProLiant DL36X Gen10 Plus 8SFF Tri-Mode Cable Kit P26451-B21

Notes: Required when Tri-Mode Controllers are selected along the U.2 or U.3 backplanes.

HPE ProLiant DL36X Gen10 Plus 2SFF Tri-Mode Cable Kit P36657-B21

Notes: Required when Tri-Mode Controllers are selected along the U.2 or U.3 backplanes.

HPE ProLiant DL36X Gen10 Plus Rear Serial Port Cable Kit P26475-B21

HPE Hard Disk Drives

Enterprise - 12G SAS - SFF Basic Carrier Drives

HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD P28352-B21

HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Self-encrypting FIPS HDD P28618-B21

Notes:

Can only be selected with U.3 backplane/cage and requires choice of either MR416i-a, MR216i-a, MR416i-p or MR216i-p Tri-Mode controller.

Local Key Management handled by controller.

iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE 1.8TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD P53562-B21

HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD P28586-B21

HPE 1TB SAS 12G Business Critical 7.2K SFF BC 1-year Warranty HDD P53563-B21

HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Self-encrypting FIPS HDD P28618-B21

Notes:

Can only be selected with U.3 backplane/cage and requires choice of either MR416i-a, MR216i-a, MR416i-p or MR216i-p Tri-Mode controller.

Local Key Management handled by controller.

iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE 900GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD P40432-B21

HPE 600GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD P53560-B21

HPE 600GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD P53561-B21

HPE 300GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD P28028-B21

HPE 300GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD P40430-B21

Midline - 12G SAS - SFF Basic Carrier Drives

HPE 2TB SAS 12G Business Critical 7.2K SFF BC 1-year Warranty 512e HDD P28505-B21

Midline - 6G SATA - SFF Basic Carrier Drives

HPE 2TB SATA 6G Business Critical 7.2K SFF BC 1-year Warranty 512e HDD P28500-B21

Additional Options

HPE 1TB SATA 6G Business Critical 7.2K SFF BC 1-year Warranty HDD P28610-B21

Midline - 12G SAS - LFF Low Profile Carrier Drives

HPE 20TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD P53553-B21

HPE 18TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD P37669-B21

HPE 16TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD P23608-B21

HPE 14TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD P09155-B21

HPE 12TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD 881781-B21

HPE 10TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e ISE Multi Vendor HDD P53556-B21

HPE 8TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD 834031-B21

HPE 6TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD 861746-B21

HPE 4TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD 833928-B21

HPE 2TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD 833926-B21

Midline - 6G SATA - LFF Low Profile Carrier Drives

HPE 20TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD P53554-B21

HPE 18TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD P37678-B21

HPE 16TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD P23449-B21

HPE 14TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD P09165-B21

HPE 12TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD 881787-B21

HPE 10TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e ISE Multi Vendor HDD P53557-B21

HPE 8TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD 834028-B21

HPE 6TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD 861742-B21

HPE 4TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD 861683-B21

HPE 2TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD 861681-B21

HPE 1TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD 861686-B21

HPE Solid State Drives

For SSD selection guidance, please visit <https://ssd.hpe.com/>

Read Intensive - 24G SAS - SFF Basic Carrier Solid State Drives

Notes: All 24G SAS drives require the High Performance Fan Kit (P26477-B21).

HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD P49045-B21

HPE 7.68TB SAS 24G Read Intensive SFF BC Multi Vendor SSD P49041-B21

HPE 7.68TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD P41399-B21

Notes:

SED capability requires choice of either MR416i-a, MR416i-p, MR216i-a or MR216i-p Tri-Mode controller and will run at 12G speeds.

Additional Options

Local Key Management handled by controller.

iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD P49035-B21

HPE 3.84TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD P41398-B21

Notes:

SED capability requires choice of either MR416i-a, MR416i-p, MR216i-a or MR216i-p Tri-Mode controller and will run at 12G speeds.

Local Key Management handled by controller.

iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE 1.92TB SAS 24G Read Intensive SFF BC Multi Vendor SSD P49031-B21

HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD P49029-B21

Mixed Use - 24G SAS - SFF Basic Carrier Solid State Drives

Notes: All 24G SAS drives require the High Performance Fan Kit (P26477-B21).

HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD P49057-B21

HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD P49053-B21

HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD P49049-B21

HPE 1.6TB SAS 24G Mixed Use SFF BC Self-encrypting FIPS PM6 SSD P41401-B21

Notes:

SED capability requires choice of either MR416i-a, MR416i-p, MR216i-a or MR216i-p Tri-Mode controller and will run at 12G speeds.

Local Key Management handled by controller.

iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD P49047-B21

HPE 800GB SAS 24G Mixed Use SFF BC Self-encrypting FIPS PM6 SSD P41400-B21

Notes:

SED capability requires choice of either MR416i-a, MR416i-p, MR216i-a or MR216i-p Tri-Mode controller and will run at 12G speeds.

Local Key Management handled by controller.

iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

Write Intensive - 24G SAS - SFF Basic Carrier Solid State Drives

Notes: All 24G SAS drives require the High Performance Fan Kit (P26477-B21).

Read Intensive - 12G Value SAS - SFF Basic Carrier Solid State Drives

HPE 7.68TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD P40509-B21

HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD P40508-B21

HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD P40507-B21

HPE 960GB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD P40506-B21

Mixed Use - 12G Value SAS - SFF Basic Carrier Solid State Drives

HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD P40512-B21

HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD P40511-B21

Additional Options

HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD P40510-B21

Very Read Intensive - 6G SATA - SFF - Basic Carrier Solid State Drives (Only for use with Broadcom MegaRAID)

HPE 7.68TB SATA 6G Very Read Optimized SFF BC 5400 SSD P58228-B21

Notes: Basic Carrier drives support on 8SFF Basic Carrier CTO Server only

Read Intensive - 6G SATA - SFF Basic Carrier Self-encrypting Solid State Drives

HPE 1.92TB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD P58240-B21

HPE 480GB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD P58236-B21

Read Intensive - 6G SATA - SFF Basic Carrier Solid State Drives

HPE 7.68TB SATA 6G Read Intensive SFF BC Multi Vendor SSD P40501-B21

HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD P40500-B21

HPE 3.84TB SATA 6G Read Intensive SFF BC PM893 SSD P44010-B21

HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD P40499-B21

HPE 1.92TB SATA 6G Read Intensive SFF BC PM893 SSD P44009-B21

HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD P40498-B21

HPE 960GB SATA 6G Read Intensive SFF BC PM893 SSD P44008-B21

HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD P40497-B21

HPE 480GB SATA 6G Read Intensive SFF BC PM893 SSD P44007-B21

HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD P40496-B21

Mixed Use - 6G SATA - SFF Basic Carrier Self-encrypting Solid State Drives

HPE 1.92TB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD P58248-B21

HPE 960GB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD P58244-B21

Mixed Use - 6G SATA - SFF Basic Carrier Solid State Drives

HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD P40505-B21

HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD P40504-B21

HPE 1.92TB SATA 6G Mixed Use SFF BC PM897 SSD P44013-B21

HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD P40503-B21

HPE 960GB SATA 6G Mixed Use SFF BC PM897 SSD P44012-B21

HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD P40502-B21

HPE 480GB SATA 6G Mixed Use SFF BC PM897 SSD P44011-B21

Read Intensive - 12G SAS - LFF Low Profile Carrier Solid State Drives

HPE 7.68TB SAS 24G Read Intensive LFF LPC Multi Vendor SSD P49040-B21

Notes: 12G SAS speeds.

Mixed Use - 12G SAS - LFF Low Profile Carrier Solid State Drives

HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS Multi Vendor SSD P37009-B21

Read Intensive - 12G SATA - LFF Low Profile Carrier Solid State Drives

HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD P47808-B21

Very Read Intensive - 6G SATA - LFF Low Profile Carrier Solid State Drive

HPE 7.68TB SATA 6G Very Read Optimized LFF LPC 5400 SSD P58232-B21

NVMe Gen4 - SSD and AIC

Notes:

Additional Options

All NVMe drives require the High Performance Fan Kit (P26477-B21).

NVMe drives are not supported on the 4LFF Model-X/CTO Server.

U.3 drives can be selected with U.2 & U.3 Drive Cage.

If NVMe or SAS4 drives are selected, the High Performance Fan Kit (P26477-B21) must be selected.

Read Intensive - PCIe/NVMe U.3 - SFF Basic Carrier Solid State Drives

HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD P50224-B21

HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD P50222-B21

Notes: Cannot be used with SR100i SW RAID.

HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD P64848-B21

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD P50219-B21

Notes: Cannot be used with SR100i SW RAID.

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD P41403-B21

Notes:

Can only be selected with U.3 backplane/cage.

For controller attached:

- o Requires choice of either MR416i-a, MR216i-a, MR416i-p or MR216i-p Tri-Mode controller.
- o Local Key Management handled by controller.

For direct attach:

- o Cannot be used with SR100i SW RAID.
- o Requires TPM 2.0 for Local Key encryption.

iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD P64846-B21

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD P50216-B21

Notes: Cannot be used with SR100i SW RAID.

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD P41402-B21

Notes:

Can only be selected with U.3 backplane/cage.

For controller attached:

- o Requires choice of either MR416i-a, MR216i-a, MR416i-p or MR216i-p Tri-Mode controller.
- o Local Key Management handled by controller.

For direct attach:

- o Cannot be used with SR100i SW RAID.
- o Requires TPM 2.0 for Local Key encryption.

iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD P64844-B21

Additional Options

HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD P64842-B21

Read Intensive - PCIe/NVMe U.3 Static - SFF Basic Carrier Solid State Drives

Notes:

- All NVMe drives require the High Performance Fan Kit (P26477-B21).
- U.3 Static drives can only be used with U.3 cages/backplanes.

HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD P47847-B21

HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD P47846-B21

HPE 1.9TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD P47845-B21

HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD P47844-B21

Mixed Use - PCIe/NVMe U.3 - SFF Basic Carrier Solid State Drives

Notes: All NVMe drives require the High Performance Fan Kit (P26477-B21).

HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD P50233-B21

Notes: Cannot be used with SR100i SW RAID.

HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD P50230-B21

HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD P41405-B21

Notes:

Can only be selected with U.3 backplane/cage.

For controller attached:

- o Requires choice of either MR416i-a, MR216i-a, MR416i-p or MR216i-p Tri-Mode controller.
- o Local Key Management handled by controller.

For direct attach:

- o Cannot be used with SR100i SW RAID.
- o Requires TPM 2.0 for Local Key encryption.

iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD P50227-B21

Notes: Cannot be used with SR100i SW RAID.

HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD P41404-B21

Notes:

Can only be selected with U.3 backplane/cage.

For controller attached:

- o Requires choice of either MR416i-a, MR216i-a, MR416i-p or MR216i-p Tri-Mode controller.
- o Local Key Management handled by controller.

For direct attach:

- o Cannot be used with SR100i SW RAID.

Additional Options

- o Requires TPM 2.0 for Local Key encryption.

iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

Notes: Cannot be used with SR100i SW RAID.

Mixed Use - PCIe/NVMe U.3 Static - SFF Basic Carrier Solid State Drives

Notes:

- All NVMe drives require the High Performance Fan Kit (P26477-B21).
- U.3 Static drives can only be used with U.3 cages/backplanes.

| | |
|--|------------|
| HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD | P47840-B21 |
| HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD | P65023-B21 |
| HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD | P47839-B21 |
| HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD | P65015-B21 |
| HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD | P47838-B21 |
| HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD | P65007-B21 |
| HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD | P47837-B21 |
| HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD | P64999-B21 |

Read Intensive - PCIe/NVMe U.2 - SFF Basic Carrier Solid State Drives

Notes:

- All NVMe drives require the High Performance Fan Kit (P26477-B21).
- U.2 drives Cannot be used with SR100i SW RAID.
- U.2 drives can only function at x4 bandwidth, doesn't support x2 or x1 connectivity.

| | |
|---|------------|
| HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD | P51457-B21 |
| HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD | P51455-B21 |
| HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD | P51453-B21 |

Mixed Use - PCIe/NVMe U.2 - SFF Basic Carrier Solid State Drives

Notes:

- All NVMe drives require the High Performance Fan Kit (P26477-B21).
- U.2 drives Cannot be used with SR100i SW RAID.
- U.2 drives can only function at x4 bandwidth, doesn't support x2 or x1 connectivity.

| | |
|---|------------|
| HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD | P51463-B21 |
| HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD | P51461-B21 |
| HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD | P51459-B21 |

Write Intensive- PCIe/NVMe U.2 - SFF Basic Carrier Solid State Drives

Notes:

- All NVMe drives require the High Performance Fan Kit (P26477-B21).
- U.2 drives Cannot be used with SR100i SW RAID.
- U.2 drives can only function at x4 bandwidth, doesn't support x2 or x1 connectivity.

| | |
|--|------------|
| HPE 750GB NVMe Gen3 High Performance Low Latency Write Intensive SFF BC U.2 P4800X SSD | P40553-B21 |
|--|------------|

Additional Options

| | |
|--|------------|
| HPE 375GB NVMe Gen3 High Performance Low Latency Write Intensive SFF BC U.2 P4800X SSD | P40552-B21 |
|--|------------|

Read Intensive - PCIe/NVMe - M.2 Solid State Drives

| | |
|--|------------|
| HPE 480GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD | P40513-B21 |
|--|------------|

Notes:

Requires DL36X x16/x8 M.2 NS204i-r Primary Riser (P26463-B21).

Quantity 2 needed by M.2 NS204i-r Riser.

Requires High Performance Fan Kit (P26477-B21).

Hard Drive Blank Kits

| | |
|----------------------------------|------------|
| HPE Gen9 LFF HDD Spade Blank Kit | 807878-B21 |
|----------------------------------|------------|

| | |
|--|------------|
| HPE Small Form Factor Hard Drive Blank Kit | 666987-B21 |
|--|------------|

HPE Smart IO

Pensando Distributed Services Card (DSC)

Notes:

– Requires UEFI, not supported on Legacy Mode.

– Requires the High Performance Fan Kit (P26477-B21).

– Each card instance requires one RTU license of Silver or Platinum software. In case of more than one adapter, RTU licenses doesn't need to be of the same part number.

o One 3yr/4yr/5yr license must be purchased for every DSC-25 or DSC-100 card in a server.

o 1yr licenses are reserved for renewals only.

| | |
|--|------------|
| Pensando Distributed Services Platform DSC-25 Enterprise 10/25Gb 2-port SFP28 Card | P26966-B21 |
|--|------------|

| | |
|---|------------|
| Pensando Distributed Services Platform DSC-100 100Gb 2-port QSFP28 Card | P37690-B21 |
|---|------------|

Pensando DSP Silver Software Licenses

| | |
|--|----------|
| Pensando Distributed Services Platform Enterprise 1-year Renewal Subscription 24x7 Support E-RTU | R6A06AAE |
|--|----------|

| | |
|--|----------|
| Pensando Distributed Services Platform Enterprise 3-year Subscription 24x7 Support E-RTU | R6A07AAE |
|--|----------|

| | |
|--|----------|
| Pensando Distributed Services Platform Enterprise 4-year Subscription 24x7 Support E-RTU | R6F68AAE |
|--|----------|

| | |
|--|----------|
| Pensando Distributed Services Platform Enterprise 5-year Subscription 24x7 Support E-RTU | R6A08AAE |
|--|----------|

Pensando DSP Platinum Software Licenses

| | |
|--|----------|
| Pensando Distributed Services Platform Enterprise Pro 1-year Renewal Subscription 24x7 Support E-RTU | R6A09AAE |
|--|----------|

| | |
|--|----------|
| Pensando Distributed Services Platform Enterprise Pro 3-year Subscription 24x7 Support E-RTU | R6A10AAE |
|--|----------|

| | |
|--|----------|
| Pensando Distributed Services Platform Enterprise Pro 4-year Subscription 24x7 Support E-RTU | R6F69AAE |
|--|----------|

| | |
|--|----------|
| Pensando Distributed Services Platform Enterprise Pro 5-year Subscription 24x7 Support E-RTU | R6A11AAE |
|--|----------|

HPE Networking

1 Gigabit Ethernet adapters

| | |
|---|------------|
| Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T Adapter for HPE | P51178-B21 |
|---|------------|

Additional Options

Notes:

This adapter can be installed in Slot1 and/or Slot 3 only.

Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE

P21106-B21

Notes:

Cannot be installed on slot #2.

Can be used to fulfill factory diagnostics requirements.

10 Gigabit Ethernet adapters

Notes: All cards below can be used to fulfill factory diagnostics requirements.

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE

P26253-B21

Marvell QL41132HLRJ Ethernet 10Gb 2-port BASE-T Adapter for HPE

P08437-B21

Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE

P26259-B21

Intel X710-DA2 Ethernet 10Gb 2-port SFP+ Adapter for HPE

P28787-B21

Marvell QL41132HLCU Ethernet 10Gb 2-port SFP+ Adapter for HPE

P21933-B21

Marvell QL41134HLCU Ethernet 10Gb 4-port SFP+ Adapter for HPE

P10094-B21

Notes: Requires UEFI, not supported on Legacy Mode.

This adapter requires Full Height riser

25 Gigabit Ethernet adapters

Notes: Unless otherwise stated, all cards below can be used to fulfill factory diagnostics requirements.

Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE

P26264-B21

Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE

P26262-B21

Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE

P08443-B21

Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE

P42044-B21

Mellanox MCX512F-ACHT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE

P13188-B21

Marvell QL41232HLCU Ethernet 10/25Gb 2-port SFP28 Adapter for HPE

P22702-B21

Notes: Requires UEFI, not supported on Legacy Mode.

Xilinx X2522-25G-PLUS Ethernet 10/25Gb 2-port SFP28 Adapter for HPE

P21109-B21

Notes: Cannot be used to fulfill factory diagnostics requirements, select an alternate NIC.

Notes: Cannot be used to fulfill factory diagnostics requirements, select an alternate NIC.

Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE

P08458-B21

Notes: Full height card, can only be installed in slot 1. Slot 3 feasible only with FH riser kit (P26467-B21)

This adapter requires Full Height riser

100 Gigabit Ethernet adapters

Notes:

All of the following cards require the High Performance Fan Kit (P26477-B21).

All cards below limited to 30°C maximum inlet temperature.

None of the cards below support PXE Boot.

Unless otherwise stated, all cards below can be used to fulfill factory diagnostics requirements.

HPE NV60100M 100Gb 2-port Storage Offload Adapter

R8M41A

HPE Ethernet 100Gb 1-port QSFP28 PCIe3 x16 MCX515A-CCAT Adapter

P31246-B21

Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE

P21112-B21

Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE

P25960-B21

200 Gigabit Ethernet adapters

Additional Options

Mellanox MCX623105AS-VDAT Ethernet 200Gb 1-port QSFP56 Adapter for HPE P10180-B21

Notes:

Can be used to fulfill factory diagnostics requirements.
Requires the High Performance Fan Kit (P26477-B21).
Support limited to 30°C maximum inlet temperature.

OCP Adapters

Notes: Unless otherwise stated, all cards below can be used to fulfill factory diagnostics requirements.

Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE P51181-B21

Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE P08449-B21

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE P10097-B21

Marvell QL41132HQRJ Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE P10103-B21

Notes: Requires UEFI, not supported on Legacy Mode.

Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE P26256-B21

Notes:

Must add x16 OCP enablement kit (P36661-B21) if NIC x16 connectivity desired.
Requires the High Performance Fan Kit (P26477-B21).

Intel X710-DA2 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE P28778-B21

Marvell QL41132HQCU Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE P08452-B21

Notes: Requires UEFI, not supported on Legacy Mode.

Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE P26269-B21

Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE P10115-B21

Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE P10106-B21

Notes: Cannot be used to fulfill factory diagnostics requirements, select an alternate NIC.

Marvell QL41232HQCU Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE P10118-B21

Notes: Requires UEFI, not supported on Legacy Mode.

Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE P42041-B21

Notes:

Requires High Performance Fan Kit (P26477-B21).

Mellanox MCX562A-ACAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE P10112-B21

Notes:

High Performance Fan Kit (P26477-B21) required for inlet temperatures above 28°C.
Must add x16 OCP enablement kit (P36661-B21) if NIC x16 connectivity desired.

HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe4 x16 OCP3 MCX653435A-HDAI Adapter P31323-B21

Notes:

Requires High Performance Fan Kit (P26477-B21).
Requires OCP x16 Enablement kit (P36661-B21).
Temperature limit of 30°C inlet, except when using the latest generation of AOCs (P28169-B2x), where the limit is 27°C inlet.

Cannot be used to fulfill factory diagnostics requirements, select an alternate NIC.

HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 OCP3 MCX653436A-HDAI Adapter P31348-B21

Notes:

Requires High Performance Fan Kit (P26477-B21).
Requires OCP x16 Enablement kit (P36661-B21).

Additional Options

The maximum inlet temperature can be 25°C, without using the newest generation of AOCs (P28169-B2x), which would make the configuration unsupported.

Not supported with 256GB LR DIMMs

Limits NVMe SSDs to a maximum of 8.

Cannot be used to fulfill factory diagnostics requirements, select an alternate NIC.

HPE InfiniBand NDR200 1-port OSFP PCIe5 x16 MCX75310AAS-HEAT Adapter

P45642-B21

Notes:

The Max selection must be equal to the Max x16 slots available on Riser selected.

If any of the IB Cards are selected, appropriate riser with x16 slot must be selected to obtain Max throughput.

This Option and Legacy Mode Setting cannot be selected together. However this combination is allowed to select if any other PCIe Networking card (without Legacy BIOS restriction) or OCP Networking (without Legacy BIOS restriction) or Infiniband OCP Card is selected.

Must select High Performance Fan when this option is selected.

HPE ProLiant DL300 Gen10 Plus OCP x16 Enablement Kit

P36661-B21

Notes:

Adds x8 PCIe 4.0 lanes to OCP slot, recovering from unused AROC connector on configurations without Flexible Storage controllers.

Cannot be used in conjunction with any the Smart Array-NVMe Adapter Kit (P38585-B21) or any Flexible Storage Controller.

HPE InfiniBand

Notes:

Requires High Performance Fan Kit (P26477-B21).

Temperature limit of 30°C inlet, except when using the latest generation of AOCs (P28169-B2x), where the limit is 27°C inlet.

None of the cards below can be used to fulfill factory diagnostics requirements, select an alternate NIC.

HPE InfiniBand HDR100/Ethernet 100Gb 1-port QSFP56 PCIe4 x16 MCX653105A-ECAT Adapter

P23665-B21

HPE InfiniBand HDR100/Ethernet 100Gb 2-port QSFP56 PCIe4 x16 MCX653106A-ECAT Adapter

P23666-B21

HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe4 x16 MCX653105A-HDAT Adapter

P23664-B21

HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 MCX653106A-HDAT Adapter

P31324-B21

HPE Omni-Path

HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel Omni-Path Architecture Adapter

829335-B21

Notes:

Requires High Performance Fan Kit (P26477-B21).

30°C maximum inlet temperature.

HPE Power Supplies

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Plus Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the **HPE Power Cords and Cables** web page.

To review the power requirements for your selected system, please use the **HPE Power Advisor Tool**.

Additional Options

For information on power specifications and technical content visit [HPE Flexible Slot Power Supplies](#).

HPE Flex Slot Hot-plug Power supplies

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit P38997-B21

Notes: 1600W Power supplies only support high line voltage (200 VAC to 240 VAC).

HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit P03178-B21

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit P38995-B21

HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit 865438-B21

HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit 865434-B21

HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit 865428-B21

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865408-B21

Notes: According to The Bureau of Indian Standards Act, 2016, BIS certification is required by every manufacturer (Indian or foreign) of those who are manufacturing products under Compulsory Certification.

–DL360 Gen10 Plus CTO Servers manufactured in Singapore with below Power Supplies are certified with BIS: P38997-B21, P38995-B21, 865438-B21, 865434-B21 and 865408-B21.

–Starting from Q3 2023, DL360 Gen10 Plus CTO Servers manufactured in the US with below Power Supply is certified with BIS: P03178-B21.

For information on BIS Certification requirement visit

BIS Certification - BIS Certificate for Import (indianchemicalregulation.com)

HPE Computation and Graphics Accelerators

NVIDIA A2 16GB PCIe Non-CEC Accelerator for HPE R9H23C

Notes:

–Requires High Performance Fan Kit (P26477-B21).

–When this accelerator is installed in a secondary riser, server cannot be shipped integrated into a rack.

NVIDIA T4 16GB Computational Accelerator for HPE R0W29C

Notes:

–Requires High Performance Fan Kit (P26477-B21).

–When this accelerator is installed in a secondary riser, server cannot be shipped integrated into a rack.

HPE ProLiant DL36X Gen10 Plus CPU1 GPU Cable Kit P26469-B21

HPE ProLiant DL36x Gen10 Plus CPU1 A4000 GPU Cable Kit P50031-B21

Notes: For cards requiring more than 75W and up to 150W.

GPGPU Information

Additional Options

| HPE DL360 Gen10 Plus Configuration | | | | | | | | |
|------------------------------------|---|----------------|------|------|----------------|------------------|-------------|------------|
| Part number | Card | Qty supp. | PCIe | 4LFF | 8SFF SAS/SAT A | 8+2SFF SAS/SAT A | 8+2SFF NVMe | 10SFF NVMe |
| R9H23C ^{1,2} | NVIDIA A2 16GB PCIe NonCEC Accelerator | 1 ³ | Gen4 | 30C | 30C | 30C | 20C | 20C |
| R0W29C ^{1,2} | NVIDIA Tesla T4 16GB Module | 3 | Gen3 | 30C | 30C | 30C | 20C | 20C |

Notes:

- Requires increased cooling to be selected in BIOS settings
- There is no Energy Star certification with Graphic cards.
- ¹ Requires high performance fans and GPU enablement kits
- ² When installed in a secondary riser, accelerator will be fulfilled as ship along, can't be racked by factory.
- ³ Nvidia GPU A2 will be available in all 3 slots (incl. Slot 2 & 3) expected in Q4 2023 with new low-profile bracket in the A2 kit.

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

GPU Enablement Kit

HPE ProLiant DL36x Gen10 Plus Full Height A4000 Riser Kit

P50027-B21

Notes:

– A Max Qty=1 of the following list of Secondary riser options is allowed per server. This means that only one item can be selected from the following list:

- o HPE DL36x Gen10+ 2P FH Riser Kit (P26467-B21)
- o HPE DL36x Gen10+ LP Riser Kit (P26471-B21)
- o HPE ProLiant DL36X Gen10 Plus x16 FH GPU Secondary Riser Power Cable v2 Kit (P50027-B21)

- Requires the selection of a 2nd Processor
- IMPORTANT!!! With the installation of this option into the server, you will lose physical access to the PCIe Slot 2 that is located on the Default / Primary Riser. The "PCIe Card Capacity Limits" must account for this reduction of PCIe slots.

HPE ProLiant DL36x Gen10 Plus CPU1 A4000 GPU Cable Kit

P50031-B21

Embedded Management

HPE iLO Advanced

HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features

512485-B21

HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features

512486-B21

HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features

512487-B21

Additional Options

| | |
|--|----------|
| HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features | BD505A |
| HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features | BD506A |
| HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features | BD507A |
| HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features | E6U59ABE |
| HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features | E6U64ABE |

Software as a Service Management

HPE GreenLake for Compute Ops Management

| | |
|--|----------|
| HPE GreenLake for Compute Ops Management Enhanced 3-year Upfront ProLiant SaaS | R7A11AAE |
|--|----------|

Additional Options

| | |
|--|----------|
| HPE GreenLake for Compute Ops Management Enhanced 1-year Upfront ProLiant SaaS | R7A10AAE |
| HPE GreenLake for Compute Ops Management Enhanced 5-year Upfront ProLiant SaaS | R7A12AAE |

Notes: For customers purchasing HPE GreenLake for Compute Ops Management, without a hardware purchase or a BTO purchase, use this base SKU within ASQ order:

| | |
|--|----------|
| HPE GreenLake for Compute Ops Management Base SaaS | R6Z73AAE |
|--|----------|

HPE iLO Common Password Setting

| | |
|-------------------------------------|------------|
| HPE iLO Common Password FIO Setting | P08040-B21 |
|-------------------------------------|------------|

Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services.

HPE Converged Infrastructure Management Software

HPE OneView Advanced (with HPE iLO Advanced)

| | |
|--|----------|
| HPE OneView including 3yr 24x7 Support Physical 1-server LTU | E5Y34A |
| HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU | E5Y35AAE |

HPE OneView Advanced (without HPE iLO Advanced)

| | |
|---|--------|
| HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU | P8B24A |
| HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU | P8B25A |

Additional Options

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU P8B26AAE

Notes:

- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>
- Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.
- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>

HPE Security

HPE 1U Gen10 Bezel Kit 867998-B21

HPE Bezel Lock Kit 875519-B21

HPE Gen10 Plus Chassis Intrusion Detection Kit P14604-B21

Notes: This provides a physical connection from the server board and hood to detect any physical intrusion into the chassis, providing security during the entire supply chain process of shipping, receiving, distribution, and operation.

HPE Trusted Platform Module 2.0 Gen10 Plus Black Rivets Kit P13771-B21

Notes:

- HPE Trusted Platform Module 2.0 option works with Gen10 Plus servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen10 or earlier servers.
- HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

HPE Gen10 TPM 1.2 FIO Setting 872108-B21

Notes: This is a FIO setting to allows the TPM 2.0 module to operate in a TPM 1.2 mode.

HPE Storage Options

Emulex Fibre Channel HBAs

HPE SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter Q0L13A

HPE SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter Q0L14A

HPE SN1600E 32Gb Single Port Fibre Channel Host Bus Adapter Q0L11A

HPE SN1600E 32Gb Dual Port Fibre Channel Host Bus Adapter Q0L12A

HPE SN1610E 32Gb 1-port Fibre Channel Host Bus Adapter R2J62A

HPE SN1610E 32Gb 2-port Fibre Channel Host Bus Adapter R2J63A

HPE SN1700E 64Gb 1-port Fibre Channel Host Bus Adapter R7N77A

HPE SN1700E 64Gb 2-port Fibre Channel Host Bus Adapter R7N78A

QLogic Fibre Channel HBAs

HPE SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter P9D93A

HPE SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter P9D94A

HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter R2E08A

HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter R2E09A

Additional Options

HPE Rack Options

Rail Kits

| | |
|--|------------|
| HPE ProLiant DL300 Gen10 Plus 1U SFF Easy Install Rail Kit | P26485-B21 |
| HPE ProLiant DL300 Gen10 Plus 1U LFF Easy Install Rail Kit | P26487-B21 |
| HPE ProLiant DL300 Gen10 Plus 1U Cable Management Arm for Rail Kit | P26489-B21 |

Notes:

- HPE rail kits contain telescoping rails which allow for in-rack serviceability.
 - Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations.
Please refer to your installation instructions for proper tools and number of people to use for any installation.
-

HPE Racks

- Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
 - Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
-

HPE Power Distribution Units (PDUs)

- Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
 - Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications. Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
 - Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
-

HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\)](#) web page.
 - Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
 - Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.
-

HPE USB and SD Options

Notes: In vSphere 7.0, VMware made changes that impact the use of an SD Card/USB media as a standalone boot device and will be removing support for them after version 7.x. SD Card/USB media can still be used as a standalone boot option through all 7.x releases via published Customer Advisory [Usage of SD Card/USB Devices As Standalone Boot Devices Has Changed Due to System Storage Changes For VMware ESXi 7.0 \(Or Later\)](#).

For any major release beyond VMware ESXi 7.x, VMware will require M.2 or another local persistent device as the standalone boot option.

Additional Options

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 32GB microSD RAID 1 USB Boot Drive

P21868-B21

HPE Tape Backup

HPE StoreEver LTO-9 Ultrium 45000 External Tape Drive

BC042A

HPE Support Services

Installation & Start-up Services

HPE Install ProLiant DL3xx Service

U4506E

HPE Installation and Startup DL3xx Service

U4507E

Tech Care

HPE 3 Year Tech Care Essential ProLiant DL360 Gen10+ Service

HY4U7E

HPE 3 Year Tech Care Essential wDMR ProLiant DL360 Gen10+ Service

HY4U8E

HPE 5 Year Tech Care Essential ProLiant DL360 Gen10+ Service

HY4X1E


HPE 5 Year Tech Care Essential wDMR ProLiant DL360 Gen10+ Service

HY4X2E

Notes: For a full listing of support services available for this server, please visit <http://www.hpe.com/services>.

Memory

Memory Population guidelines

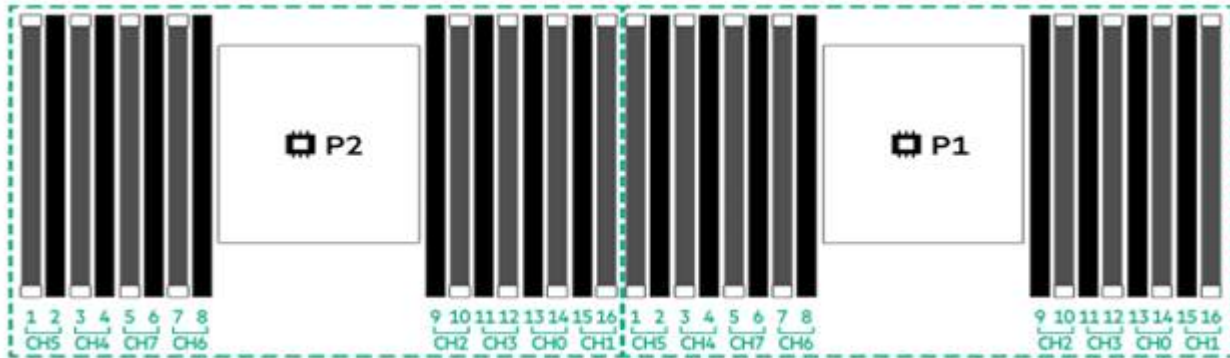

HPE ProLiant DL360 Gen10 Plus

| HPE ProLiant Gen10 Plus 16 slot per CPU DIMM population order | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|
| DIMM population order | | | | | | | | | | | | | | | | |
| DIMM slot | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| 1 DIMM | | | | | | | | | | | | | | 14 | | |
| 2 DIMMs | | | 3 | | | | | | | | | | | 14 | | |
| 4 DIMMs | | | 3 | | | | 7 | | | 10 | | | | 14 | | |
| 6 DIMMs | 1 | | 3 | | | | 7 | | | 10 | | | | 14 | | 16 |
| 8 DIMMs ^{2,3} | 1 | | 3 | | 5 | | 7 | | | 10 | | 12 | | 14 | | 16 |
| 12 DIMMs | 1 | 2 | 3 | 4 | | | 7 | 8 | 9 | 10 | | | 13 | 14 | 15 | 16 |
| 12 DIMMs ^{1,2,3} | 1 | | 3 | 4 | 5 | | 7 | 8 | 9 | 10 | | 12 | 13 | 14 | | 16 |
| 16 DIMMs ^{2,3} | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |

Notes:

- Omitted DIMM counts/socket not qualified by Intel.
- ¹ Required by Sub-NUMA Cluster (SNC) configurations, must be ordered with 12 DIMM SNC2 FIO Enable Kit (P26933-B21).
- ² Support Hemi (hemisphere mode)
- ³ Support Software Guard Extensions (SGX)

General Memory Population Rules and Guidelines

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.


Memory

- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.
- For details on the HPE Server Memory Options Population Rules, visit: <http://www.hpe.com/docs/memory-population-rules>
- To realize the performance memory capabilities listed in this document, HPE DDR4 Smart Memory is required. For additional information, please see the [HPE DDR4 Smart Memory QuickSpecs](#).


Notes: The maximum memory speed is a function of the memory type, memory configuration, and processor model.

For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>

Storage

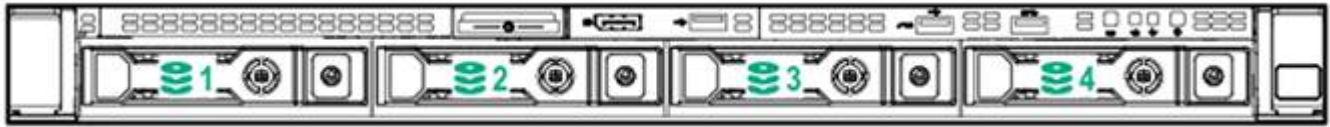

4 LFF device bay numbering

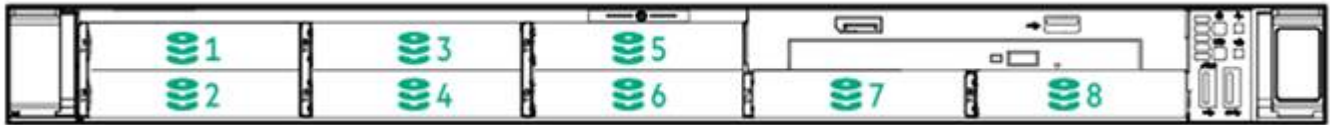

8 SFF + ODD device bay numbering



8 SFF + 2 SFF device bay numbering

| Box | Description |
|-----|--------------|
| 1 | Bays 1-8 |
| 2 | Bays 1 and 2 |

Technical Specifications

System Unit

Dimensions (Height x Width x Depth)

SFF Drives

- 4.29 x 43.46 x 74.19 cm
1.69 x 17.11 x 29.21 in

LFF Drives

- 4.29 x 43.46 x 77.31 cm
1.69 x 17.11 x 30.44 in

Weight (approximate)

- **13.29 kg (29.29 lb)**
 - **SFF minimum:** One drive, one processor, one power supply, two heatsinks, one Smart Array controller, and five fans.
- **18.11 kg (39.92 lb)**
 - **SFF maximum:** 10 drives, two processors, two power supplies, two heatsinks, one Smart Array controller and seven fans.
- **15.09 kg (33.27 lb)**
 - **LFF minimum:** one drive, one processor, one power supply, two heatsinks, one Smart Array controller and five fans.
- **19.45 kg (42.88 lb)**
 - **LFF maximum:** Four drives, two processors, two power supplies, two heatsinks, one Smart Array controller and seven fans.

Input Requirements (per power supply)

Rated Line Voltage

- For 1800-2200W (Titanium): 200 to 240 VAC
- For 1600W (Platinum): 200-240 VAC
- For 800W (Titanium): 200-240 VAC
- For 800W (Platinum): 100-240 VAC
- For 800W (Universal): 200-277 VAC
- For 800W (-48VDC): -40 Vdc to -72 Vdc
- For 500W (Platinum): 100-240 VAC

BTU Rating

Maximum

- For 1800-2400W (Titanium) Power Supply: 6497BTU/hr (at 200 VAC), 7230 BTU/hr (at 220 VAC), 7962 BTU/hr (at 240 VAC)
- For 1600W (Platinum) Power Supply: 5918 BTU/hr (at 200 VAC), 5888 BTU/hr (at 220 VAC), 5884 BTU/hr (at 240 VAC)
- For 800W (Titanium) Power Supply: 2905 BTU/hr (at 200 VAC), 2899 BTU/hr (at 220 VAC), 2893

Technical Specifications

- BTU/hr (at 240 VAC)
 - For 800W (Platinum) Power Supply: 3067 BTU/hr (at 100 VAC), 2958 BTU/hr (at 200 VAC), 2949 BTU/hr (at 240 VAC)
 - For 800W (Universal) Power Supply: 2964 BTU/hr (at 200 VAC), 2951 BTU/hr (at 230 VAC), 2936 BTU/hr (at 277 VAC)
 - For 800W(-48Vdc) Power Supply: 2983 BTU/hr (at -40 Vdc), 2951 BTU/hr (at -48VDC), 2912 BTU/hr (at -72Vdc)
 - For 500W (Platinum) Power Supply: 1902 BTU/hr (at 100 VAC), 1840 BTU/hr (at 200 VAC), 1832 BTU/hr (at 240 VAC)
-

Power Supply Output (per power supply)

Rated Steady-State Power

- For 1800W-2200W (Titanium) Power Supply: 2200W (at 240 VAC). 2200W (at 240 VDC) input for China only
- For 1600W (Platinum) Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
- For 800W (Titanium) Power Supply: 800W (at 200 VAC), 800W (at 240 VAC), 800W (at 240 VDC) for China only
- For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
- For 800W (Universal) Power Supply: 800W (at 200 VAC), 800W (at 277 VAC)
- For 800W (-48VDC) Power Supply: 800W (at -40 Vdc), 800W (at -72Vdc)
- For 500W (Platinum) Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VDC) input for China only

Maximum Peak Power

- For 1800W-2200W (Titanium) Power Supply: 2200W (at 240 VAC). 2200W (at 240 VDC) input for China only
 - For 1600W (Platinum) Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
 - For 800W (Titanium) Power Supply: 800W (at 200 VAC), 800W (at 240 VAC), 800W (at 240 VDC) for China only
 - For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
 - For 800W (Universal) Power Supply: 800W (at 200 VAC), 800W (at 277 VAC)
 - For 800W (-48VDC) Power Supply: 800W (at -40 Vdc), 800W (at -72Vdc)
 - For 500W (Platinum) Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VDC) input for China only
-

System Inlet Temperature

- **Standard Operating Support**

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.

System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

Technical Specifications

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hpe.com/servers/ashrae>

- **Extended Ambient Operating Support**

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system require the High Performance Fan Kit (P26477-B21) and are listed at the URL:

<http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- **Non-operating**

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

Relative Humidity (non-condensing)

- **Operating**

8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

- **Non-operating**

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Altitude

- **Operating**

3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

- **Non-operating**

9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Emissions Classification (EMC)

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Technical Specifications

HPE Smart Array

For latest information on [HPE Smart Array Gen10 Plus Controllers for HPE ProLiant DL, ML and Apollo Servers](#) please refer to their QuickSpecs.

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

| Test case | 1 | 3 | 4 | 5 | 6 |
|------------------|--------|--------|--------|--------|--------|
| Idle | | | | | |
| LWAd | 5.1 B | 5.4 B | 5.4 B | 5.1 B | 5.1 B |
| LpAm | 35 dBA | 38 dBA | 39 dBA | 36 dBA | 35 dBA |
| Operating | | | | | |
| LWAd | 5.9 B | 5.6 B | 6.2 B | 5.1 B | 5.6 B |
| LpAm | 45 dBA | 41 dBA | 47 dBA | 34 dBA | 40 dBA |

Notes: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers [end-of-life product return, trade-in, and recycling programs](#), in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the [Hewlett Packard Enterprise web site](#). These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|----------|---|
| 05-Sep-2023 | Version 27 | Change d | Standard Feature, Core Options and Additional Options were updated. |
| 10-Jul-2023 | Version 26 | Change d | Additional Options section was updated. |
| 05-Jun-2023 | Version 25 | Change d | Additional Options section was updated. |
| 01-May-2023 | Version 24 | Change d | Optional Features and Additional Options sections were updated. |
| 06-Mar-2023 | Version 23 | Change d | Pre-Configured Models and Configuration Information were updated. |
| 10-Jan-2023 | Version 22 | Change d | Additional Options section was updated Obsolete SKUs were removed. |
| 05-Dec-2022 | Version 21 | Change d | Core Options and Additional Options section were updated. |
| 14-Nov-2022 | Version 20 | Change d | Optional Features and additional Options sections were updated. Obsolete SKUs were removed. |
| 06-Sep-2022 | Version 19 | Change d | Core Options and Configuration Information sections were updated. Obsolete SKUs were removed. |
| 01-Aug-2022 | Version 18 | Change d | Core Options and Configuration Information sections were updated. Obsolete SKUs were removed. |
| 05-Jul-2022 | Version 17 | Change d | Additional Options and Memory sections were updated. Obsolete SKUs were removed. |
| 27-Jun-2022 | Version 16 | Change d | Additional Options section was updated. Obsolete SKUs were removed. |
| 02-May-2022 | Version 15 | Change d | Pre-Configured Models and Additional Options sections were updated. Obsolete SKUs were removed. |
| 22-Apr-2022 | Version 14 | Change d | Standard Features and Additional Options sections were updated. Obsolete SKU was removed. |
| 21-Mar-2022 | Version 13 | Change d | Overview, Pre-Configured Models and Additional Options sections were updated. |
| 07-Mar-2022 | Version 12 | Change d | Additional Options section was updated. |
| 10-Jan-2022 | Version 11 | Change d | Overview, Configuration Information, Additional Options and Core Options sections were updated. Obsolete SKUs were removed. |
| 06-Dec-2021 | Version 10 | Change d | Overview, Configuration Information, Additional Options and Core Options sections were updated. Obsolete SKUs were removed. |
| 01-Nov-2021 | Version 9 | Change d | Overview, Standard Features, Configuration Information, Additional Options and Core Options sections were updated. Obsolete SKUs were removed. |
| 11-Oct-2021 | Version 8 | Change d | Overview, Standard Features, Configuration Information and Core Options sections were updated. Obsolete SKUs were removed. |



Summary of Changes

| | | | |
|-------------|-----------|----------|---|
| 07-Sep-2021 | Version 7 | Change d | Overview, Standard Features, Configuration Information, Core Options, Additional Options and Technical Specifications sections were updated. Obsolete SKUs were removed. |
| 16-Aug-2021 | Version 6 | Change d | Overview, Standard Features, Configuration Information, Core Options, and Technical Specifications sections were updated. Obsolete SKUs were removed. |
| 02-Aug-2021 | Version 5 | Change d | Overview, Standard Features, Configuration Information, Core Options and Technical Specifications sections were updated. Obsolete SKUs were removed. |
| 06-Jul-2021 | Version 4 | Change d | Overview, Pre-Configured Models, Configuration Information and Core Options sections were updated. Obsolete SKUs were removed. |

| Date | Version History | Action | Description of Change |
|-------------|-----------------|----------|--|
| 07-Jun-2021 | Version 3 | Change d | Overview, Standard Features, Configuration Information, Core Options, Memory and Storage sections were updated. Supplementary 3 rd Generation Intel® Xeon® Scalable Processors and Pre-Configured Models were added. Operating Systems and Virtualization Software list was updated. Obsolete SKUs were removed. |
| 12-Apr-2021 | Version 2 | Change d | Overview and Configuration Information sections were updated. Added delayed availability notice; Corrected 8351N & 6314U processors UPI info; Corrected VMware ESX versions supported. |
| 06-Apr-2021 | Version 1 | New | New QuickSpecs. |

Copyright

Make the right purchase decision. Contact our presales specialists.

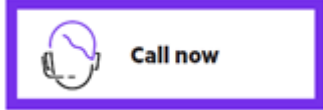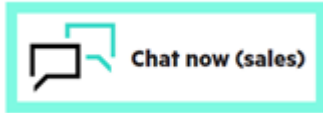

© Copyright 2023 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

a50002559enw - 16714 - Worldwide - V27 - 05-September-2023