

Overview

HPE ProLiant BL460c Gen10 Server Blade

Scale business performance and securely drive Traditional and Hybrid IT workloads across a converged infrastructure with the new HPE ProLiant BL460c Gen10 server blade for HPE BladeSystem. The HPE ProLiant BL460c Gen10 server blade helps drive new applications, turbo charge performance and transform into an agile, secure foundation, which with HPE OneView, places you on the path to Composable Infrastructure.



HPE ProLiant BL460c Gen10 Server Blade – Front View

- | | |
|---|-------------------------------|
| 1. Serial label pull tab (SUV Connector located behind) | 6. Quick access panel |
| 2. Unique identification (UID) LED | 7. Front hot-plug drive bays |
| 3. Health status bar LED | 8. NIC activity LED |
| 4. Power Button | 9. Server blade release lever |
| 5. iLO USB connection | |

What's New

- Larger memory capacity with 128GB DIMMs
- Additional Intel Xeon Scalable Family of processor – 614+New options for HPE Smart Array controllers

Standard Features

Platform Information

This document covers the HPE ProLiant BL460c Gen10 server blade only.

For information on HPE BladeSystems c-Class Enclosures and HPE BladeSystem c-Class Interconnect and Mezzanine Components, please see the following HPE BladeSystem c-Class QuickSpecs:

- HPE BladeSystem c3000 Enclosure QuickSpecs at <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128340.pdf>
NOTE: The c3000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c7000 Enclosure QuickSpecs at <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>
NOTE: The c7000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c-Class Interconnect and Mezzanine Components at <https://www.hpe.com/us/en/integrated-systems/bladesystem.html>

NOTE: For optimal cooling and system performance the BL460c Gen10 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.

NOTE: For proper BladeSystem operation, the minimum required versions of HPE Onboard Administrator and HPE Virtual Connect are required and available via the HPE Service Pack for ProLiant, please see http://h17007.www1.hpe.com/us/en/enterprise/servers/products/service_pack/spp/index.aspx

Form Factor HPE ProLiant BL460c Gen10 is a half-height server blade that plugs into the HPE BladeSystem c3000 and c7000 enclosures.

Standard Features

Processors - Up to 2 of the following depending on model.

NOTE: For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>

NOTE: Intel Xeon Platinum 8160M, Gold 6142M, 6140M, and 6134M support extended memory capacities up to 1.5TB per socket versus 768GB per socket for standard processors. However, maximum memory capacity for the server will be limited by maximum capacity DIMMs available and number of DIMM slots. The BL460c Gen10 will support a maximum memory capacity of 512GB per socket with 64GB DIMMs regardless of processor chosen. This maximum will increase as larger capacity DIMMs are qualified for the server.

| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | QPI | DDR4 MT/s |
|----------------------------|---------------|-------|----------|-------|---------------|-----------|
| Platinum Processors | | | | | | |
| Platinum 8164 Processor | 2.0 GHz | 26 | 35.75 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s |
| Platinum 8160 Processor | 2.1 GHz | 24 | 33.00 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s |
| Platinum 8158 Processor | 3.0 GHz | 12 | 24.75 MB | 150 | 3 @ 10.4 GT/s | 2666 MT/s |
| Platinum 8153 Processor | 2.0 GHz | 16 | 22 MB | 125 | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold Processors | | | | | | |
| Gold 6152 Processor | 2.1 GHz | 22 | 30.25 MB | 140W | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold 6148 Processor | 2.4 GHz | 20 | 27.50 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold 6144 Processor | 3.5 GHz | 8 | 24.75 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold 6142 Processor | 2.6 GHz | 16 | 22.00 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold 6140 Processor | 2.3 GHz | 18 | 24.75 MB | 140W | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold 6138 Processor | 2.0 GHz | 20 | 27.50 MB | 125W | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold 6136 Processor | 3.0 GHz | 12 | 24.75 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold 6134 Processor | 3.2 GHz | 8 | 24.75 MB | 130W | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold 6132 Processor | 2.6 GHz | 14 | 19.25 MB | 140W | 3 @ 10.4 GT/s | 2666 MT/s |

Standard Features

| | | | | | | |
|--------------------------|---------|----|----------|------|---------------|-----------|
| Gold 6130 Processor | 2.1 GHz | 16 | 22.00 MB | 125W | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold 6128 Processor | 3.4 GHz | 6 | 19.25 MB | 115W | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold 6126 Processor | 2.6 GHz | 12 | 19.25 MB | 125W | 3 @ 10.4 GT/s | 2666 MT/s |
| Gold 5122 Processor | 3.6 GHz | 4 | 16.50 MB | 105W | 2 @ 10.4 GT/s | 2666 MT/s |
| Gold 5120 Processor | 2.2 GHz | 14 | 19.25 MB | 105W | 2 @ 10.4 GT/s | 2400 MT/s |
| Gold 5118 Processor | 2.3 GHz | 12 | 16.50 MB | 105W | 2 @ 10.4 GT/s | 2400 MT/s |
| Gold 5115 Processor | 2.4 GHz | 10 | 13.75 MB | 85W | 2 @ 10.4 GT/s | 2400 MT/s |
| Silver Processors | | | | | | |
| Silver 4116 Processor | 2.1 GHz | 12 | 16.50 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s |
| Silver 4114 Processor | 2.2 GHz | 10 | 13.75 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s |
| Silver 4112 Processor | 2.6 GHz | 4 | 8.25 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s |
| Silver 4110 Processor | 2.1 GHz | 8 | 11.00 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s |
| Bronze Processors | | | | | | |
| Bronze 3104 Processor | 1.7 GHz | 6 | 11.00 MB | 85W | 2@ 9.6 GT/s | 2133 MT/s |

NOTE: When using processors of 135W or greater, 10 fans are required in the c7000 for optimal performance.

NOTE: Memory per socket is based on the processor maximum supported memory, not the BL460c memory maximum.

NOTE: Platinum – 8100 Series - 2S - 2UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2666 MT/s, 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology
Intel AVX-512 (2x 512-bit FMA), 48 lanes PCIe 3.0, advanced RAS.

NOTE:Gold – 5100, 6100 Series - 2S - 2UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2400 MHz (SKU 5122=supports 2666), 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA) (SKU 5122 supports 2x 512 bit FMA), 48 lanes PCIe 3.0, advanced RAS.

NOTE: Silver – 4100 Series - 2S - 2UPI @ 9.6 GT/s, 6-Channel DDR4 @ 2400 MHz, 768 GB memory capacity, Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA), 48 lanes PCIe 3.0, standard RAS.

Chipset

Intel C621 Chipset

NOTE: For more information regarding Intel chipsets, please see the following: <http://www.intel.com/content/www/us/en/chipsets/chipsets-overview.html>

On System Management Chipset

HPE iLO 5 ASIC

NOTE: Read and learn more in the [iLO QuickSpecs](#).

Memory

One of the following depending on Model

| | |
|----------------------------------|--|
| Type | HPE SmartMemory DDR4 Load Reduced (LRDIMM), or Registered (RDIMM) |
| Standard (Pre-configured Models) | 128GB (4 x 32GB) DDR4 2666MT/s LRDIMMs at 1.2V 64GB (4x 16GB) DDR4 2666MT/s RDIMMs at 1.2V 16GB (2 x 8GB) DDR4 2666MT/s RDIMMs at 1.2V |
| Maximum (LRDIMM) 2TB | 16 x 128GB up to 2666MT/s at 1.2V (processor dependent) |
| Maximum (RDIMM) 512GB | 16 x 32GB up to 2666MT/s at 1.2V |

NOTE: HPE memory from previous generation servers is not supported with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen10. For additional

Standard Features

information, please see the [HPE SmartMemory QuickSpecs](#)

at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

NOTE: LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

NOTE: Depending on the memory configuration and processor model, the memory speed may run at 2666MT/s, 2400MT/s, 2133MT/s, or 1866MT/s. Please see the [Online Memory Configuration Tool](#) at:

<https://memoryconfigurator.hpe.com/DDR4memoryconfig/Home/SelectServer>

Memory Protection

Advanced ECC

Memory Mirroring

Memory Online Spare Mode (Rank Spare Mode)

Network Controller

One of the following depending on Model

- One (1) 20Gb 2-port FlexFabric FLB, 10Gb 2-port HPE FlexFabric FLB, or 10Gb 2-port Ethernet FLB
NOTE: Supports FCoE, TCP/IP offload engine, hardware-based accelerated iSCSI, iSCSI boot, and autosensing 10Gb/1Gb Ethernet.
NOTE: Each port is autosensing the speed, and can interoperate with 1Gb HPE BladeSystem c-Class interconnect components. Both ports will operate at the same speed.
NOTE: FlexFabric capabilities require the use of an HPE Virtual Connect FlexFabric or Flex10/10D module. Fibre Channel over Ethernet (FCoE) is supported with HPE interconnects. Learn more at: <https://www.hpe.com/us/en/integrated-systems/virtual-connect.html>
- One (1) HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM
- One (1) HPE FlexFabric 10Gb 2-port 560FLB FlexibleLOM
- One (1) HPE FlexFabric 20Gb 2-port 630FLB FlexibleLOM
- One (1) HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM
NOTE: FlexibleLOMs are not compatible with c-Class server blades prior to Gen9.
- Standard iLO Network Controller:
One (1) 10/100 Mbps port for the HPE iLO 5 to Onboard Administrator link. The Onboard Administrator (with 10/100/1000 Mbps) to BladeSystem link is 1Gbps

Expansion Slots

Two (2) I/O expansion mezzanine slots:

- x16 PCIe 3.0 Type A (supports Type A mezzanine cards) (expansion slot 1).
NOTE: This expansion slot supports dual-port mezzanine cards: one port is routed to interconnect module bay 3 and the other to bay 4.
- x16 PCIe 3.0 Type B (supports Type A and Type B mezzanine cards) (expansion slot 2).
NOTE: This expansion slot supports dual-port and quad-port mezzanine cards. For dual-port cards, one port is routed to interconnect module bay 5 and the other to bay 6. For quad-port cards, one port is routed to interconnect module bay 5, one to bay 6, one to bay 7, and one to bay 8.
NOTE: A second processor must be installed (in processor slot 2) to have access to the second expansion slot (expansion slot 2).

Mezzanine card options include:

- Dual-port 20Gb FlexFabric, Dual-port 10Gb FlexFabric, and 10GbE options.
- Dual-port 16Gb Fibre Channel HBA for SAN connectivity.
- QDR and FDR InfiniBand for low latency and high bandwidth server interconnectivity.
- I/O accelerator mezzanine options for high transaction rate local storage

HPE Server ROM

Standard Features

HPE ROM (read only memory) is now digitally signed using the HPE Corporate Signing Service. This signature is verified before the flash process starts, reducing accidental programming and preventing malicious efforts to corrupt system ROM.

HPE ROM provides for essential initialization and validation of hardware components before control is passed to the customer-installed operating system. The ROM also provides the capability of booting from various fixed media (HDD, CD-ROM) and removable media (USB), to continue operation to the operating system.

HPE ROM performs very early configuration of the video controller, to allow monitoring of initialization progress via an attached monitor. If configuration or hardware errors are discovered during this early phase of hardware initialization, suitable messages are now displayed on the connected monitor. Additionally, these configuration or hardware errors are logged to the Integrated Management Log (IML) to assist in diagnosis.

The HPE ProLiant ROM is used to configure the following:

- Processor and chipset status registers
- System memory, memory map, and memory initialization
- System hardware configuration (integrated PCI devices and optional PCIe cards).
- Customer-specific BIOS configuration using the HPE ROM-Based Setup Utility (RBSU).

HPE Server UEFI /Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration while interacting with your server at boot time. HPE ProLiant Gen10 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

NOTE: The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <https://www.hpe.com/us/en/product-catalog/detail/pip.6935826.html>

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using HPE RESTful API
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: HPE Legacy FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory.

Storage Controller

All BTO Models

One (1) HPE Smart Array P204i-b 12G SAS modular Controller with 1GB Flash-Backed Write Cache (FBWC), or HPE Smart Array S100i SR Gen10 SW RAID.

NOTE: The HPE Smart Array P204i-b and the HPE Smart Array S100i SR Gen10 SW RAID (chipset SATA) support up to two (2) small form factor (SFF) or 4 ultra form factor (uFF) hot plug drive bays.

NOTE: For NVMe support, please select the NVMe FIO setting (873373-B21) available on CTO models only.

Maximum Internal Storage

Two drives bays for SFF HPE Smart Drives. Capacities dependent on drive size selected.

NOTE: The ProLiant BL460c Gen10 server blade includes the HPE hot plug small form factor (SFF) SmartDrive carrier for enhanced management and reduced maintenance errors. HPE drives from previous generation servers (prior to Gen8) are not compatible with the ProLiant BL460c Gen10 drive bays.

Interfaces

Micro SDHC Slot

One (1) internal Micro Secure Digital High Capacity (Micro SDHC) card slot

Standard Features

USB 3.0 Port One (1) internal USB 3.0 connector for USB flash media drive keys

NOTE: The above options are intended for integrated hypervisor virtualization environments.

Industry Standard Compliance

ACPI 6.1 Compliant
PCIe 3.0 Compliant
WOL Support
Microsoft® Logo certifications
PXE Support
USB 3.0 Compliant (internal); USB 2.0 Compliant (external ports via SUV)
SMBIOS 3.1
UEFI 2.6
Redfish API

Operating Systems and Virtualization Software Support for ProLiant Servers

Microsoft Windows Server
VMware
Red Hat Enterprise Linux Server
SUSE Linux Enterprise Server

For specific OS support information please visit Server Operating Systems and Virtualization Software – links found at <https://www.hpe.com/us/en/servers/server-operating-systems.html> or http://h17007.www1.hpe.com/us/en/enterprise/servers/supportmatrix/redhat_linux.aspx#.WuyQvk3rtaQ

NOTE: For more information on the HPE Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrices at: <http://h17007.www1.hpe.com/us/en/enterprise/servers/supportmatrix/windows.aspx> http://h17007.www1.hpe.com/us/en/enterprise/servers/supportmatrix/oracle_linux.aspx <http://h17007.www1.hpe.com/us/en/enterprise/servers/supportmatrix/vmware.aspx> and our driver download page: <http://h17007.www1.hpe.com/us/en/enterprise/servers/supportmatrix/vmware.aspx#.WuyRBE3rtaQ>

Security Features

UEFI Secure Boot and Secure Start support
Immutable Silicon Root of Trust
Support for Commercial National Security Algorithms (CNSA)
iLO Security Modes including a New iLO Advance Premium Security License
Granular control over iLO interfaces
Tamper-free updates – components digitally signed and verified
Secure Recovery – recover critical firmware to known good state on detection of compromised firmware
TPM (Trusted Platform Module) 1.2 option
TPM (Trusted Platform Module) 2.0 option Bezel Locking Kit

Enclosures

Hewlett Packard Enterprise offers two different c-Class server blade enclosures to meet your individual needs:

- The HPE BladeSystem c7000 rack enclosure is 10U high and holds up to sixteen (16) ProLiant BL460c Gen10 servers plugged vertically.
- The HPE BladeSystem c3000 rack enclosure is 6U high and holds up to eight (8) HPE ProLiant BL460c Gen10 servers plugged horizontally.

Server blades, interconnect modules, power supplies, fans, and redundant Onboard Administrator modules are all designed to fit into the c3000 and c7000 enclosures.

Standard Features

NOTE: For additional enclosure information, please see: <https://www.hpe.com/us/en/product-catalog/storage/disk-enclosures/pip.hpe-bladesystem-c7000-enclosures.1844065.html>

Graphics

Integrated Matrox G200eh video controller

- 1600 x 1200 (32 bpp)
- 1920 x 1200 (16 bpp)

HPE iLO Management On System Management Memory

- 16 MB Flash Video Memory
- 256 MB DDR 3 with ECC (112 MB after ECC and video)

HPE Server UEFI / Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

NOTE: The UEFI System Utilities tool is analogous to the ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant.
- PXE boot support for IPv6 networks
- Workload Profiles for simple performance optimization

UEFI Boot Mode only:

- TPM 2.0 Support
- NVMe Boot Support
- Platform Trust Technology (PTT) can be enabled.
- iSCSI Software Initiator Support.
- HTTP/HTTPs Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: Legacy FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Server.

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hpe.com/info/ilo>

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hpe.com/servers/uefi>

Intelligent Provisioning

Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning. Learn more at <http://www.hpe.com/servers/intelligentprovisioning>

Standard Features

- iLO RESTful API** iLO RESTful API is Redfish API conformant and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. <http://www.hpe.com/info/restfulapi>
- Server Utilities**
- Active Health System** The HPE Active Health System (AHS) is an essential component of iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. <http://www.hpe.com/servers/ahs>
- Active Health System Viewer** Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>
- Smart Update** Keep your servers up to date with the HPE's Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at <http://www.hpe.com/info/smartupdate>
- iLO Amplifier Pack** Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities. Learn more at <http://www.hpe.com/servers/iLOamplifierpack>
- HPE iLO Mobile Application** Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>
- RESTful Interface Tool** RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>
- Scripting Tools** Provision one to many servers using your own scripts to discover and deploy with Scripting Toolkit (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/stk> or <http://www.hpe.com/servers/powershell>
- HPE OneView Standard** HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE Servers generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. <http://www.hpe.com/info/oneview>

Optional Features

Fibre Channel Support

Up to two (2) optional 16Gb Fibre Channel mezzanine HBAs are supported on the HPE ProLiant BL460c Gen10.

Compatible SAN

HPE ProLiant BL460c Gen10 server blades are optimized for HPE MSA, EVA, 3PAR and XP.

HPE ProLiant BL460c Gen10 server blades are compatible with select 3rd party SANs. Please see blade storage page for more details at <https://www.hpe.com/us/en/integrated-systems/bladesystem.html>.

HPE Virtual Connect

HPE Virtual Connect is an interconnect option for c-Class BladeSystem that simplifies server connectivity to data and storage networks, and reduces costs. Unique HPE Flex-10 technology makes maximum use of network bandwidths, provide dynamic tuning and enable extreme flexibility to meet individual server and infrastructure requirements by allocating up to 4 network connections per server port. Virtual Connect FlexFabric modules extend those capabilities to allocate one function per port to storage connections (FCoE).

HPE OneView's software-defined approach to infrastructure management enables central console to administer network connections and workloads for thousands of servers, see

<https://www.hpe.com/us/en/integrated-systems/management-software.html>

For more information on Virtual Connect Ethernet, Fibre Channel, Converged Network and management options, see <https://www.hpe.com/us/en/integrated-systems/virtual-connect.html>

Server Management

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8 Gen9 and Gen10 servers. <http://www.hpe.com/info/oneview>

HPE Insight Control

NOTE: Insight Control is not supported with Gen10 server blades.

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality <http://www.hpe.com/servers/iloadvanced>

HPE OneView

Powerful converged management of servers, storage, and network for IT service automation and infrastructure simplicity.

HPE iLO Advanced Premium Security Edition

HPE iLO Advanced Premium Security Edition for iLO 5 includes iLO Advanced License plus high-end security modes, unique security capabilities, like Automatic FW recovery; Runtime FW verification, and Secure erase. <http://www.hpe.com/servers/ilopremium>

HPE Matrix Operating Environment

The HPE Matrix Operating Environment (Matrix OE) for ProLiant and Integrity servers is an integrated command center that helps you instantly adjust to dynamic business demands. This advanced infrastructure management software lets you reduce the cost of common data center tasks by up to 40 percent while keeping pace with your changing business. The HPE Matrix OE includes the

Optional Features

automated provisioning, optimization, and recovery management capabilities for HPE CloudSystem Matrix, the ideal platform for private cloud and Infrastructure as a Service (IaaS).

For more information, visit: <http://h20392.www2.hpe.com/portal/swdepot/displayProductInfo.do?productNumber=HPID>

HPE iLO Scale-Out

HPE iLO Scale-Out is the preferred license built for web hosting, cloud service providers, and high performance computing data centers, managing massive scale out environments. This license offers sophisticated scripting tools that provides remote access through Text Console via SSH, Dynamic power capping, Email-based Alerting and proactive notifications. <http://www.hpe.com/servers/iLO/scale-out>

HPE Cluster Platforms

HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering.

<https://www.hpe.com/us/en/solutions/hpc-high-performance-computing.html>

HPE HPC Interconnects

High Performance Computing (HPC) interconnect technologies are available for this server as part of the HPE Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by Hewlett Packard Enterprise when integrated within an HPE cluster.

Get connected to HPE

To get the most from your investment in Hewlett Packard Enterprise servers, get connected to Hewlett Packard Enterprise using our innovative remote support technology which provides system health monitoring, pre-failure alert notification and more.

Expansion Blade Support

Supports one (1) optional PCI Expansion Blade

NOTE: D2200sb and D2220sb storage blades are not compatible with BL460c Gen10 server blade.

NOTE: Gen9 and older HPE option cards will not function in PCI Expansion Blade when paired with a BL460c Gen10 server blade

Factory Express Portfolio for Servers and Storage

HPE Factory Express offers configuration, customization, integration and deployment services for Hewlett Packard Enterprise servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. Hewlett Packard Enterprise products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services on your specific server model please contact your sales representative or go to: <https://www.hpe.com/us/en/services/factory-express.html>

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>

Service and Support

Recommended Support Services for BL460

Protect your business beyond warranty with HPE Support Services

HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution roadmap. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, operational services provides innovative new approaches like Flexible Capacity and Datacenter Care, to keep your business at peak performance. HPE is ready to bring together all the pieces of the puzzle for you, with an eye on the future, and make the complex simple.

Connect your devices:

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%1 reduction in down time, near 100%2 diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to HPE support.

1- IDC 2 – HP CSC reports 2014 – 2015

Learn more about getting connected at <http://www.hpe.com/services/getconnected>

Proactive Care service levels

HPE Proactive Care* with 24x7 coverage, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

HPE Proactive Care Advanced* - 24x7 coverage, three year Support Service

This service helps achieve a higher return on your product investment with personalized support from a local assigned Account Support Manager who will share best practice advice and personalized recommendations designed to help improve availability and performance to increase stability and reduce unplanned downtime. Leverage your system's ability to connect to HPE for pre-failure alerts, automatic call logging and parts dispatch. For business critical incidents, this service offers critical event management to reduce mean time to resolution. This recommendation provides 24x7 coverage with four-hour response for hardware and collaborative support that offers two-hour callback for supported software issues. Collaborative software management is included with independent software vendors unless you have your software support from HPE where we own all cases from start through to resolution. <https://www.hpe.com/h20195/v2/getdocument.aspx?docname=4AA5-3259ENW>

NOTE: HPE Proactive Care and HPE Proactive Care Advanced require that the customer connect their devices to make the most of these services and receive all the deliverables.

Other related Services

HPE Installation and Startup Service

Provides for the installation and startup of HPE technology including BladeSystem, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux).

HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

Service and Support

HPE Datacenter Care service

HPE Datacenter Care helps improve IT stability and security, increase the value of IT, and enable agility and innovation. It is a structured framework of repeatable, tested, and globally available services “building blocks.” You can deploy, operate, and evolve your datacenter wherever you are on your IT journey. With HPE Datacenter Care, you benefit from a personalized relationship with HPE via a single point of accountability for HPE and others’ products. For more information, visit <http://www.hpe.com/services/datacentercare>

HPE Flexibly Capacity

With Flexible Capacity, you get the speed, scalability, and economics of the public cloud in the privacy of your data center. Gain the advantages of the public cloud—consumption-based payment, rapid scalability without worrying about capacity constraints. Reduce the “heavy lifting” needed to operate a data center. And retain the advantages that IT provides the business (i.e., control, security). Deliver the right user experience, choose the right technology for the business, manage privacy and compliance, and manage the cost of IT. And, you have the option to use the public cloud when needed.

HPE Factory Express for Servers and Storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAXxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

HPE Technology Services Support Credits offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <http://www.hpe.com/ww/learn>

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers. Learn more <http://www.hpe.com/support/hpesc>

HPE's Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

NOTE*: HPE Support Center Mobile App is subject to local availability. For more information: <http://www.hpe.com/services>

Service and Support

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

Models

| | | |
|-----------------------------|--|---|
| [SKU Number] | 863446-B21 | 863447-B21 |
| Model Name | HPE ProLiant BL460c Gen10 Intel Xeon-G 5120 2.2GHz 14-core 2P 64GB-R Server | HPE ProLiant BL460c Gen10 Intel Xeon-G 6140 2.3GHz 18-core 2P 128GB-R Server |
| Processor | Intel Xeon Gold 5120 (14C, 2.2G, 105W) | Intel Xeon Gold 6140 (18C, 2.3G, 140W) |
| Number of Processors | 2 | 2 |
| Cache Memory | 19.25MB | 24.75MB |
| Memory (max) | 1.5TB | 1.5TB |
| Network Controller | 536FLB | 650FLB |
| Storage Controller | HPE Smart Array P204b-i (12G SAS, 1GB FBWC) | HPE Smart Array P204b-i (12G SAS, 1GB FBWC) |
| Hard Drive | Not included | Not included |
| Mezzanine Slots | 2 x16 PCIe 3.0 | 2 x16 PCIe 3.0 |
| Warranty | 3-3-3 | 3-3-3 |

Configuration Information - Factory Integrated Models

HPE Recommended Options have the best performance, value and availability.

Recommended Options have been selected by Hewlett Packard Enterprise experts to provide the right technology for a range of workloads and market segments. Fully integrated into the ProLiant management and security experience, Recommended Options provide the best fit with timely availability. [View the list for your region.](#)

Extended Options provide an extended catalog of products tailored for customers in specific markets or with specific workloads, requiring the utmost in performance or value. Fully integrated into the ProLiant management and security experience, Extended Options represent great value and performance but typically have a longer lead-time.

NOTE: This section lists some of the steps required to configure a Factory Integrated Model (configure-to-order or CTO server). To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

NOTE: Configure-to-order server blades must start with a CTO Blade Server.

NOTE: FIO indicates that this option is only available as a factory installable option.

NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

Step 1: Base Server Blade Configuration (Select a configurable Blade)

| | | |
|---------------|---|------------|
| Models | HPE ProLiant BL460c Gen10 10Gb/20Gb FlexibleLOM Configure-to-order Blade Server | 863442-B21 |
| | HPE ProLiant BL460c Gen10 TAA-compliant Configure-to-order Blade Server | 875938-B21 |

NOTE: Trade Agreement Act (TAA) and means that these SKUs are manufactured in countries that are part of the global trade act. This provides greater security assurance that these servers come from countries that signed the agreement act. This is particularly important to HPE customers in our federal sector and other verticals that have concerns about the country of origin for our solutions.

Configurable Models ship with:

One (1) FlexibleLOM connector providing a choice for one (1) of the supported 10Gb/20Gb FlexibleLOMs (see Step 2)
 Two (2) HPE small form factor hot-plug SAS/SATA/ HDD or SSD hard drive bays
 Two (2) x16 PCIe I/O expansion slots (one Type A, one Type A/B)
 One (1) integrated USB connector and one (1) MicroSDHC connector
 One (1) TPM connector
 HPE iLO Management (standard)

Step 2: Choose Required Options (one of the following from each list unless otherwise noted)

HPE Processors

NOTE: All configure-to-order processor kits (i.e. xxxxxx-L21) contain one (1) processor.

NOTE: If two processors are desired, select one xxxxxx-L21 here in Step 2 and one xxxxxx-B21 in Step 4.

Intel Xeon-Platinum Processors

| | |
|--|------------|
| HPE BL460c Gen10 Intel® Xeon-Platinum 8160 (2.1GHz/24-core/150W) FIO Processor Kit | 875957-L21 |
| HPE BL460c Gen10 Xeon-Platinum 8164 (2.0GHz/26-core/150) Processor FIO Kit | 875958-L21 |
| HPE BL460c Gen10 Xeon-Platinum 8158 (3.0GHz/12-core/150) Processor FIO Kit | 875956-L21 |
| HPE BL460c Gen10 Xeon-Platinum 8153 (2.0GHz/16-core/150) Processor FIO Kit | 875954-L21 |

Intel Xeon-Gold Processors

| | |
|--|------------|
| HPE BL460c Gen10 Intel® Xeon-Gold 5115 (2.4GHz/10-core/85W) FIO Processor Kit | 872013-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 5118 (2.3GHz/12-core/105W) FIO Processor Kit | 872014-L21 |

Configuration Information - Factory Integrated Models

| | |
|--|------------|
| HPE BL460c Gen10 Intel® Xeon-Gold 5120 (2.2GHz/14-core/105W) FIO Processor Kit | 872015-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 5122 (3.6GHz/4-core/105W) FIO Processor Kit | 875939-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6126 (2.6GHz/12-core/120W) FIO Processor Kit | 875940-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6128 (3.4GHz/6-core/115W) FIO Processor Kit | 875941-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6130 (2.1GHz/16-core/120W) FIO Processor Kit | 875942-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6132 (2.6GHz/14-core/140W) FIO Processor Kit | 875943-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6134 (3.3GHz/8-core/130W) FIO Processor Kit | 875944-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6136 (3.0GHz/12-core/150W) FIO Processor Kit | 875945-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6138 (2.0GHz/20-core/120W) FIO Processor Kit | 875946-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6140 (2.3GHz/18-core/135W) FIO Processor Kit | 875947-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6142 (2.6GHz/16-core/145W) FIO Processor Kit | 875948-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6144 (3.5GHz/8-core/150W) FIO Processor Kit | 875949-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6148 (2.4GHz/20-core/145W) FIO Processor Kit | 875950-L21 |
| HPE BL460c Gen10 Intel® Xeon-Gold 6152 (2.1GHz/22-core/135W) FIO Processor Kit | 875951-L21 |

Intel Xeon-Silver Processors

| | |
|---|------------|
| HPE BL460c Gen10 Intel® Xeon-Silver 4110 (2.1GHz/8-core/85W) FIO Processor Kit | 872012-L21 |
| HPE BL460c Gen10 Intel® Xeon-Silver 4112 (2.6GHz/4-core/85W) FIO Processor Kit | 872009-L21 |
| HPE BL460c Gen10 Intel® Xeon-Silver 4114 (2.2GHz/10-core/85W) FIO Processor Kit | 872010-L21 |
| HPE BL460c Gen10 Intel® Xeon-Silver 4116 (2.1GHz/12-core/85W) FIO Processor Kit | 872011-L21 |

Intel Xeon-Bronze Processor

| | |
|--|------------|
| HPE BL460c Gen10 Intel® Xeon-Bronze 3104 (1.7GHz/6-core/85W) FIO Processor Kit | 872006-L21 |
|--|------------|

NOTE: When using processors of 135W or greater, 10 fans are required in the c7000 for optimal performance.
NOTE: DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

NOTE: Supports 1 or 2 processors. Mixing different processor models is not supported.

NOTE: For the Intel® C621 Chipset Scalable Family Processors come with model numbers to indicate SKU level, processor generation, SKU model, integrations-optimizations or memory capacity. (ie. HPE BL460c Gen10 Gen10 Intel Xeon-Gold 6134M; 6 is the SKU Level, 1 is the processor generation, 34 is the SKU model, m indicates memory sku)

NOTE: The letter "M" following the model number indicates higher maximum memory support up to 1.5TB per processor.

NOTE: Platinum – 8100 Series - 2S - 2UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2666 MT/s, 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA), 48 lanes PCIe 3.0, advanced RAS.

NOTE: Gold – 5100, 6100 Series - 2S - 2UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2400 MHz (SKU 5122=supports 2666), 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA) (SKU 5122 supports 2x 512 bit FMA), 48 lanes PCIe 3.0, advanced RAS.

NOTE: Silver – 4100 Series - 2S - 2UPI @ 9.6 GT/s, 6-Channel DDR4 @ 2400 MHz, 768 GB memory capacity, Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA), 48 lanes PCIe 3.0, standard RAS.

NOTE: The BL460c Gen10 includes two I/O mezzanine expansion slots. A processor must be installed in processor slot 1 for access to the first mezzanine expansion slot (expansion slot 1). A processor must be installed in processor slot 2 for access to the second mezzanine expansion slot (expansion slot 2).

HPE Memory

HPE SmartMemory

Registered DIMMs (RDIMMs)

| | |
|---|------------|
| HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 815097-B21 |
|---|------------|

Configuration Information - Factory Integrated Models

| | |
|---|------------|
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 815098-B21 |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 835955-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 815100-B21 |

Load Reduced DIMMs (LRDIMMs)

| | |
|--|------------|
| HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit | 815101-B21 |
| HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Memory Kit | 815102-B21 |

NOTE: HPE memory from previous generation servers is not supported with this server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen10.

NOTE: LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a server.

NOTE: 128GB DIMMs cannot be mixed with other DIMM capacities within the server

NOTE: Depending on the memory configuration and processor model, the memory speed may run at 2666MT/s, 2400MT/s, or 2133MT/s. Please see the Online Memory Configuration Tool

at: <https://h22195.www2.hp.com/DDR4memoryconfig/Home/LEGAL>

Non-Volatile Memory DIMMs (NVDIMMs)

| | |
|---|------------|
| HPE 16GB NVDIMM Single Rank x4 DDR4-2666 Module Kit | 845264-B21 |
|---|------------|

NOTE: HPE memory from previous generation servers (DDR3) is not compatible with this compute module. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen10. For additional information, please see the [HPE SmartMemory QuickSpecs](#).

NOTE: LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a compute module.

NOTE: For the latest information on [Memory Speed](#).

NOTE: If you want to know more about the memory, reference the [RAS feature whitepaper](#).

HPE Networking

FlexibleLOM Adapters

NOTE: The server requires one (1) FlexibleLOM that is installed in the FlexibleLOM connectors. All FlexibleLOMs are dual port: One port is routed to interconnect module bay 1 and the other to bay 2.

20Gb FlexibleLOM Adapters

| | |
|---|------------|
| HPE FlexFabric 20Gb 2-port 630M Adapter | 700076-B21 |
| HPE FlexFabric 20Gb 2-port 630FLB Adapter | 700065-B21 |
| HPE FlexFabric 20Gb 2-port 650M Adapter | 700767-B21 |
| HPE FlexFabric 20Gb 2-port 650FLB Adapter | 700763-B21 |

10Gb FlexibleLOM Adapters

| | |
|---|------------|
| HPE FlexFabric 10Gb 2-port 534M Adapter | 700748-B21 |
| HPE FlexFabric 10Gb 2-port 536FLB Adapter | 766490-B21 |
| HPE Ethernet 10Gb 2-port 560M Adapter | 665246-B21 |
| HPE Ethernet 10Gb 2-port 560FLB Adapter | 655639-B21 |

HPE Storage Controllers

| | |
|--|------------|
| HPE FIO Enable Smart Array B140i Setting | 784308-B21 |
|--|------------|

NOTE: The HPE Smart Array S100i SR Controller (chipset SATA) comes standard with the HPE BL460c Gen10 10Gb/20Gb FLB CTO Blade. If the HPE Smart Array P204i-b controllers is not chosen, a SATA cable will be provided to support SATA devices for the two internal drive bays. If RAID is required when using the S100i, please choose 'HPE FIO Enable Smart Array S100i SR Setting' (784308-B21).

| | |
|--|------------|
| HPE Smart Array P204i-b SR Gen10 (4 Internal Lanes/1GB Cache) 12G SAS Modular Controller | 804367-B21 |
| HPE Smart Array P408e-m SR Gen10 (8 External Lanes/2GB Cache) 12G SAS Mezzanine Controller | 804381-B21 |

Configuration Information - Factory Integrated Models

Step 3: Choose Additional Factory Integration Options

HPE Unique Options

HPE BL460c Gen10 M.2 FIO Kit 873870-B21

HPE Gen10 NVMe FIO Setting 873373-B21

NOTE: The HPE Gen10 NVMe FIO Setting (873373-B21) is required to support SFF NVMe SSDs within the system. This option is not compatible with the HPE Smart Array P204i-b, Hewlett Packard Enterprise recommends the use of a dual M.2 solid state drive enablement kit (873870-B21) together with M.2 SSD media for boot when using this option.

HPE Legacy FIO Mode Setting 758959-B22

NOTE: Changes default UEFI BIOS setting into Legacy BIOS setting. (758959-B22) is not supported with HPE Dual 8GB microSD EM USB Kit (741279-B21) nor with HPE FIO Enable Smart Array S100i SR Setting (784308-B21). Must select HPE Gen10 TPM 1.2 FIO if this is selected.

HPE Memory Fast Fault Tolerance FIO Kit 875293-B21

NOTE: Enables Double Device Data Correct (DDDC) with significantly higher performance.

HPE Gen10 TPM 1.2 FIO 872108-B21

NOTE: Can only be selected with TPM 2.0 Gen10 Kit (864279-B21)

Converged Infrastructure Management Software

HPE OneView with iLO Advanced - Server hardware required on same purchase order

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU E5Y35AAE

HPE OneView for Blade Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU F6Q89A

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below. For additional options, including server blade enclosures interconnect, mezzanine options and power subsystem options; please see the Core Options and Additional sections below; or the following:

- HPE BladeSystem c3000 Enclosure QuickSpecs:
<https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128340.pdf>
NOTE: The c3000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c7000 Enclosure QuickSpecs:
<https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>
NOTE: The c7000 HPE c-Class enclosures have full backwards and forwards compatibility, existing server blades are supported in the new enclosures and any future server blades will be supported in the existing enclosures.
- HPE BladeSystem c-Class Interconnect and Mezzanine Components:
<https://www.hpe.com/us/en/integrated-systems/bladesystem.html#portfolio>

NOTE: For optimal cooling and system performance the BL460c Gen10 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.

Core Options

HPE Recommended Options have the best performance, value and availability.

Recommended Options have been selected by Hewlett Packard Enterprise experts to provide the right technology for a range of workloads and market segments. Fully integrated into the ProLiant management and security experience, Recommended Options provide the best fit with timely availability. **[View the list for your region.](#)**

Extended Options provide an extended catalog of products tailored for customers in specific markets or with specific workloads, requiring the utmost in performance or value. Fully integrated into the ProLiant management and security experience, Extended Options represent great value and performance but typically have a longer lead-time.

HPE Networking

NOTE: A 10 Gigabit Ethernet adapter supports linking at 1Gbps or 10Gbps when connected to an interconnect module with 10Gb Ethernet downlinks.

NOTE: A 10 Gigabit Ethernet adapter supports linking at only 1Gbps when connected to an interconnect module with 1Gb Ethernet downlinks.

NOTE: The 10 Gigabit Ethernet adapters on each server blade connect to a 10Gb interconnect in bays 3-6 (HPE BladeSystem c7000 Enclosure) or bays 2-4 (HPE BladeSystem c3000 Enclosure).

20 Gigabit Ethernet Mezzanine Cards - Recommended

HPE FlexFabric 20Gb 2-port 630M Adapter (Recommended) 700076-B21

NOTE: Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04312720>

HPE FlexFabric 20Gb 2-port 650M Adapter (Recommended) 700767-B21

NOTE: Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04347342>

10 Gigabit Ethernet Mezzanine Cards - Recommended

HPE FlexFabric 10Gb 2-port 534M Adapter (Recommended) 700748-B21

NOTE: Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/us/en/product-catalog/servers/server-adapters.html>

HPE Ethernet 10Gb 2-port 560M Adapter (Recommended) 665246-B21

NOTE: Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04111406.pdf>

FlexibleLOM Adapters

NOTE: The server supports one (1) FlexibleLOM that is installed in the FlexibleLOM connectors and is already included in the pre-configured models. However, it must be added in Step 2 for Configure-to-Order Models. The FlexibleLOM options below are used to change these original FlexibleLOMs.

20Gb FlexibleLOM Adapters - Recommended

HPE FlexFabric 20Gb 2-port 630FLB Adapter (Recommended) 700065-B21

NOTE: Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04312719>

HPE FlexFabric 20Gb 2-port 650FLB Adapter (Recommended) 700763-B21

NOTE: Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04347341>

NOTE: Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04347246>

HPE Ethernet 10Gb 2-port 560FLB Adapter (Recommended) 655639-B21

NOTE: Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04111516.pdf>

Core Options

HPE Infiniband Mezzanine Adapters - Extended

NOTE: When an InfiniBand adapter is installed in mezzanine slot 1, only one port is active (regardless of operating mode). When installed in mezzanine slot 2, both ports are active.

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+M Adapter (Extended) 764283-B21

NOTE: The FDR InfiniBand adapter must be installed in mezzanine slot 1 for FDR mode and may be installed in either mezzanine slot if operated in any other mode.

10Gb FlexibleLOM Adapters - Recommended

HPE FlexFabric 10Gb 2-port 536FLB Adapter (Recommended) 766490-B21

HPE Fibre Channel- Recommended

HPE LPe1605 16Gb Fibre Channel HBA for BladeSystem c-Class (Recommended) 718203-B21

NOTE: Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/getpdf.aspx/c04315132.pdf?ver=2>

HPE QMH2672 16Gb Fibre Channel Host Bus Adapter (Recommended) 710608-B21

NOTE: Please see QuickSpecs for technical specifications and additional information at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04126962>

HPE Processors

Intel Xeon-Platinum Processors - Recommended

HPE BL460c Gen10 Intel Xeon-Platinum 8160 (2.1GHz/24-core/145W) Processor Kit (Recommended) 875957-B21

HPE BL460c Gen10 Intel Xeon-Platinum 8164 (2.0GHz/26-core/150W) Processor Kit (Recommended) 875958-B21

HPE BL460c Gen10 Intel Xeon-Platinum 8158 (3.0GHz/12-core/105W) Processor Kit (Recommended) 875956-B21

Intel Xeon-Platinum Processors - Extended

HPE BL460c Gen10 Intel Xeon-Platinum 8153 (2.0GHz/16-core/125W) Processor Kit (Extended) 875954-B21

Intel Xeon-Gold Processors - Recommended

HPE BL460c Gen10 Intel Xeon-Gold 5115 (2.4GHz/10-core/85W) Processor Kit (Recommended) 872013-B21

HPE BL460c Gen10 Intel Xeon-Gold 5118 (2.3GHz/12-core/105W) Processor Kit (Recommended) 872014-B21

HPE BL460c Gen10 Intel Xeon-Gold 5120 (2.2GHz/14-core/105W) Processor Kit (Recommended) 872015-B21

HPE BL460c Gen10 Intel Xeon-Gold 5122 (3.6GHz/4-core/105W) Processor Kit (Recommended) 875939-B21

HPE BL460c Gen10 Intel Xeon-Gold 6126 (2.6GHz/12-core/120W) Processor Kit (Recommended) 875940-B21

HPE BL460c Gen10 Intel Xeon-Gold 6128 (3.4GHz/6-core/115W) Processor Kit (Recommended) 875941-B21

HPE BL460c Gen10 Intel Xeon-Gold 6130 (2.1GHz/16-core/120W) Processor Kit (Recommended) 875942-B21

HPE BL460c Gen10 Intel Xeon-Gold 6132 (2.6GHz/14-core/140W) Processor Kit (Recommended) 875943-B21

HPE BL460c Gen10 Intel Xeon-Gold 6134 (3.3GHz/8-core/130W) Processor Kit (Recommended) 875944-B21

HPE BL460c Gen10 Intel Xeon-Gold 6136 (3.0GHz/12-core/150W) Processor Kit (Recommended) 875945-B21

HPE BL460c Gen10 Intel Xeon-Gold 6138 (2.0GHz/20-core/120W) Processor Kit (Recommended) 875946-B21

HPE BL460c Gen10 Intel Xeon-Gold 6140 (2.3GHz/18-core/140W) Processor Kit (Recommended) 875947-B21

HPE BL460c Gen10 Intel Xeon-Gold 6142 (2.6GHz/16-core/145W) Processor Kit (Recommended) 875948-B21

HPE BL460c Gen10 Intel Xeon-Gold 6148 (2.4GHz/20-core/145W) Processor Kit (Recommended) 875950-B21

HPE BL460c Gen10 Intel Xeon-Gold 6152 (2.1GHz/22-core/135W) Processor Kit (Recommended) 875951-B21

Intel Xeon-Silver Processors - Recommended

HPE BL460c Gen10 Intel Xeon-Silver 4110 (2.1GHz/8-core/85W) Processor Kit (Recommended) 872012-B21

HPE BL460c Gen10 Intel Xeon-Silver 4112 (2.6GHz/4-core/85W) Processor Kit (Recommended) 872009-B21

HPE BL460c Gen10 Intel Xeon-Silver 4114 (2.2GHz/10-core/85W) Processor Kit (Recommended) 872010-B21

HPE BL460c Gen10 Intel Xeon-Silver 4116 (2.1GHz/12-core/85W) Processor Kit (Recommended) 872011-B21

Intel Xeon-Bronze Processor

Core Options

HPE BL460c Gen10 Intel Xeon-Bronze 3104 (1.7GHz/6-core/85W) Processor Kit

872006-B21

NOTE: When using processors of 135W or greater, 10 fans are required in the c7000 for optimal performance.

NOTE: DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

NOTE: Supports 1 or 2 processors. Mixing different processor models is not supported.

NOTE: For the Intel® C621 Chipset Scalable Family Processors come with model numbers to indicate SKU level, processor generation, SKU model, integrations-optimizations or memory capacity. (ie. HPE BL460c Gen10 Intel Xeon-Gold 6134M; 6 is the SKU Level, 1 is the processor generation, 34 is the SKU model, m indicates memory sku)

NOTE: The letter "M" following the model number indicates higher maximum memory support up to 1.5TB per processor.

NOTE: Platinum – 8100 Series - 2S - 2UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2666 MT/s, 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA), 48 lanes PCIe 3.0, advanced RAS.

NOTE: Gold – 5100, 6100 Series - 2S - 2UPI @ 10.4 GT/s, 6-Channel DDR4 @ 2400 MHz (SKU 5122=supports 2666), 768 GB memory capacity (1.5 TB on select skus), Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA) (SKU 5122 supports 2x 512 bit FMA), 48 lanes PCIe 3.0, advanced RAS.

NOTE: Silver – 4100 Series - 2S - 2UPI @ 9.6 GT/s, 6-Channel DDR4 @ 2400 MHz, 768 GB memory capacity, Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512(1x 512-bit FMA), 48 lanes PCIe 3.0, standard RAS.

NOTE: The BL460c Gen10 includes two I/O mezzanine expansion slots. A processor must be installed in processor slot 1 for access to the first mezzanine expansion slot (expansion slot 1). A processor must be installed in processor slot 2 for access to the second mezzanine expansion slot (expansion slot 2).

HPE Solid State M.2 SATA Drives

HPE Solid State M.2 drives for installation internal to server blade - Recommended

NOTE: The solid state M.2 drives require the selection of HPE BL460c Gen10 M.2 FIO Enablement Kit (873870-B21).

NOTE: M.2 drives cannot be mixed with other sizes and capacities within the system.

NOTE: RAID 1, 0, and 5 are provided through the S100i in UEFI BIOS mode only.

HPE BL460c Gen10 M.2 FIO Enablement Kit (Recommended) (Recommended)

873870-B21

HPE 240GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD (Recommended)

875488-B21

HPE 480GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD (Recommended)

875498-B21

HPE Solid State M.2 drives for installation internal to server blade - Extended

HPE 480GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD (Extended)

875490-B21

HPE 960GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD (Extended)

875492-B21

HPE 960GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD (Extended)

875500-B21

HPE 400GB NVMe x4 Lanes Mixed Use M.2 22110 3yr Wty Digitally Signed Firmware SSD (Extended)

875583-B21

HPE 800GB NVMe x4 Lanes Mixed Use M.2 22110 3yr Wty Digitally Signed Firmware SSD (Extended)

875585-B21

HPE 480GB NVMe x4 Lanes Read Intensive M.2 22110 3yr Wty Digitally Signed Firmware SSD (Extended)

875579-B21

HPE 960GB NVMe x4 Lanes Read Intensive M.2 22110 3yr Wty Digitally Signed Firmware SSD (Extended)

875581-B21

HPE Drives

NOTE: The ProLiant BL460c Gen9 server includes the HPE hot-plug small form factor (SFF) SmartDrive carrier for enhanced management and reduced maintenance errors. HPE drives from generation G7 servers and before are not compatible with the BL460c Gen9 drive bays.

NOTE: The mixing of standard SAS drives with SAS SSD is supported within the server, but limits the RAID configuration to two separate RAID 0 volumes. Mixing of other drives types is not supported.

NOTE: HPE hard drives have either a one year or three year warranty; refer to the specific hard drive

Core Options

QuickSpecs for details.

NOTE: The hard drive options are not required when configuring a drive-less model.

HPE NVMe PCIe Read Intensive SFF (2.5-inch) Solid State Drives - Recommended

HPE 2TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 877986-B21

HPE NVMe PCIe Read Intensive SFF (2.5-inch) Solid State Drives - Extended

HPE 480GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875587-B21

HPE 960GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875589-B21

HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875591-B21

HPE 1TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 877984-B21

HPE 4TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 877988-B21

HPE NVMe PCIe Mixed Use SFF (2.5-inch) Solid State Drives - Recommended

HPE 400GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 875593-B21

HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 875595-B21

HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 877994-B21

HPE NVMe PCIe Mixed Use SFF (2.5-inch) Solid State Drives - Extended

HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875597-B21

HPE 3.2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 877998-B21

HPE NVMe PCIe Write Intensive SFF (2.5-inch) Solid State Drives - Recommended

HPE 375GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 878014-B21

SATA Hot Plug SmartDrive SFF (2.5-inch) SSD Drives - Recommended

HPE 3.84TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) P00896-B21

SATA Hot Plug SmartDrive SFF (2.5-inch) SSD Drives - Extended

HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877740-B21

HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877746-B21

HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877752-B21

HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877758-B21

HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877764-B21

HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877776-B21

HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877782-B21

HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 877788-B21

HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) 880295-B21

SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives - Recommended

HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) 870753-B21

HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) 870757-B21

HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) 870759-B21

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD (Recommended) 765464-B21

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended) 832514-B21

HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD (Recommended) 765466-B21

HPE 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD (Recommended) 881457-B21

SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives - Extended

HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD (Extended) 870765-B21

Core Options

SATA (2.5-inch) Hard Drives - Recommended

| | |
|--|------------|
| HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended) | 655710-B21 |
| HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD (Recommended) | 765455-B21 |

12G SAS Read Intensive SFF (2.5-inch) SC SSD - Recommended

| | |
|--|------------|
| HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 875326-B21 |
| HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 875313-B21 |
| HPE 480GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 875311-B21 |
| HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 872390-B21 |
| HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 872392-B21 |
| HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 872394-B21 |
| HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | P04556-B21 |
| HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | P04560-B21 |
| HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | P04564-B21 |
| HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | P04566-B21 |

12G SAS Read Intensive SFF (2.5-inch) SC SSD - Extended

| | |
|---|------------|
| HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) | 875330-B21 |
| HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) | 870144-B21 |
| HPE 15.3TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) | 870148-B21 |
| HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) | P04570-B21 |

12G SAS Mixed Use SFF (2.5-inch) SC SSD - Recommended

| | |
|--|------------|
| HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 873359-B21 |
| HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 873363-B21 |
| HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 873365-B21 |
| HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 873367-B21 |
| HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 872374-B21 |
| HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 872376-B21 |
| HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 872382-B21 |

12G SAS Mixed Use SFF (2.5-inch) SC SSD - Extended

| | |
|---|------------|
| HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) | 872386-B21 |
|---|------------|

12G SAS Write Intensive SFF (2.5-inch) SC SSD - Recommended

| | |
|--|------------|
| HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 873351-B21 |
| HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 873355-B21 |

12G SAS Write Intensive SFF (2.5-inch) SC SSD - Extended

| | |
|---|------------|
| HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended) | 873357-B21 |
|---|------------|

6G SAS Mixed Use SFF (2.5-inch) SC Solid State Drive - Recommended

| | |
|---|------------|
| HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 875478-B21 |
| HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 875474-B21 |
| HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 875470-B21 |
| HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 875483-B21 |

12G SAS SFF (2.5-inch) SC 3yr Wty H2 Drive - Recommended

| | |
|--|------------|
| HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD (Recommended) | 872481-B21 |
| HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) | 872479-B21 |
| HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) | 872477-B21 |
| HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended) | 872475-B21 |

Core Options

12G SATA 2.5in RI-3 SFF SC SSD - Recommended

| | |
|--|------------|
| HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 875513-B21 |
| HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 875511-B21 |
| HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 875509-B21 |
| HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended) | 875503-B21 |

NOTE: The mixing of standard SAS drives with SAS SSD is supported within the server, but limits the RAID configuration to two separate RAID 0 volumes. Mixing of other drives types is not supported

Additional Options

HPE Recommended Options have the best performance, value and availability.

Recommended Options have been selected by Hewlett Packard Enterprise experts to provide the right technology for a range of workloads and market segments. Fully integrated into the ProLiant management and security experience, Recommended Options provide the best fit with timely availability. [View the list for your region.](#)

Extended Options provide an extended catalog of products tailored for customers in specific markets or with specific workloads, requiring the utmost in performance or value. Fully integrated into the ProLiant management and security experience, Extended Options represent great value and performance but typically have a longer lead-time.

HPE iLO Advanced License

HPE Integrated Lights-Out (iLO) Advanced for ProLiant BladeSystem Remote Management

| | |
|---|------------|
| HPE iLO Advanced for BladeSystem Electronic License with 3yr Support on iLO Licensed Features | E6U63ABE |
| HPE iLO Advanced for BladeSystem 1-server License with 3yr Support on iLO Licensed Features | BD502A |
| HPE iLO Advanced for BladeSystem Electronic License with 1yr Support on iLO Licensed Features | E6U60ABE |
| HPE iLO Advanced for BladeSystem 1-server License with 1yr Support on iLO Licensed Features | 512488-B21 |

NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one or three years of 24 x 7 HPE Software Technical Support Service.

NOTE: For additional license kits, including electronic delivery options, please see the iLO QuickSpecs at <https://www.hpe.com/us/en/servers/integrated-lights-out-ilo.html>

NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one or three year of 24 x 7 HPE Software Technical Support Service.

Converged Infrastructure Management Software

HPE OneView

HPE OneView with iLO Advanced

| | |
|--|----------|
| HPE OneView including 3yr 24x7 Support Physical 1-server LTU | E5Y34A |
| HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU | E5Y35AAE |
| HPE OneView Physical Media Kit LTU | E5Y37A |
| HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU | P8B24A |
| HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU | P8B26AAE |
| HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU | P8B31A |

NOTE: For additional license kits please see the QuickSpecs at <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154343>

HPE Security

| | |
|--|------------|
| HPE Trusted Platform Module 2.0 Gen10 Option (Recommended) | 864279-B21 |
|--|------------|

NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008 R2 and 2012. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 R2 and 2012 has not been tampered with while the system was offline.

NOTE: For more information about TPM, including a white paper, go to <https://h20195.www2.hpe.com/v2/GetPDF.aspx/c04939549.pdf>

Additional Options

NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.

NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

HPE Storage Controllers - Recommended

| | |
|--|------------|
| HPE Smart Array P204i-b SR Gen10 (4 Internal Lanes/1GB Cache) 12G SAS Modular Controller (Recommended) | 804367-B21 |
| HP FIO Enable Smart Array B140i Setting | 784308-B21 |
| HPE Gen10 NVMe FIO Setting | 873373-B21 |

HPE Storage Controllers - Extended

| | |
|---|------------|
| HPE Smart Array P408e-m SR Gen10 (8 External Lanes/2GB Cache) 12G SAS Mezzanine Controller (Extended) | 804381-B21 |
|---|------------|

NOTE: The HPE Gen10 NVMe FIO Setting (873373-B21) is required to support SFF NVMe SSDs within the system. This option is not compatible with the HPE Smart Array P204i-b, Hewlett Packard Enterprise recommends the use of a dual M.2 solid state drive kit for boot when using this option.

NOTE: The HPE Smart Array S100i SR Controller (chipset SATA) comes standard with the HPE BL460c Gen10 10Gb/20Gb FLB CTO Blade. If the HPE Smart Array P204i-b controllers is not chosen, a SATA cable will be provided to support SATA devices for the two internal drive bays. If RAID is required when using the S100i, please choose 'HPE FIO Enable Smart Array S100i SR Setting' (784308-B21).

HPE Secure Encryption

| | |
|---|----------|
| HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU | Q2F26AAE |
|---|----------|

NOTE: HPE Secure Encryption is supported on the HPE Smart Array P204i-b and P408e-m as an option. HPE Secure Encryption licensing is based on the number of physical drives requiring encryption.

NOTE: For more information about HPE Secure Encryption, go to <https://www.hpe.com/us/en/product-catalog/detail/pip.6532260.html>

HPE InfiniBand Mezzanine Adapters - Extended

NOTE: InfiniBand FDR is the only speed supported on the HPE BL460c Gen10. For additional information, please see the HPE BladeSystem c7000 Enclosure and InfiniBand QuickSpecs at:

<https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>

<https://www.hpe.com/h20195/v2/getpdf.aspx/c04126044.pdf?ver=26>

| | |
|---|------------|
| HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+M Adapter (Extended) | 764283-B21 |
|---|------------|

NOTE: The FDR InfiniBand adapter must be installed in mezzanine slot 1 for FDR mode and may be installed in any mezzanine slot if operated in any other mode.

NOTE: When an InfiniBand adapter is installed in mezzanine slot 1, only one port is active (regardless of operating mode). When installed in any other mezzanine slot, both ports are active.

HPE Flash Media Kits for USB Drives

HPE Enterprise Mainstream Flash Media Kits for Memory Cards - Recommended

| | |
|--|------------|
| HPE 8GB microSD Flash USB Drive (Recommended) | 737953-B21 |
| HPE 8GB microSD Flash Memory Card (Recommended) | 726116-B21 |
| HPE 32GB microSD Flash Memory Card (Recommended) | 700139-B21 |
| HPE 8GB Dual microSD Flash USB Drive (Recommended) | 741279-B21 |

HPE Pointnext operational services

Proactive Care Services

| | |
|---|--------|
| HPE 3 Year Proactive Care 24x7 ProLiant BL460c Gen10 Service | H7LT4E |
| HPE 3 Year Proactive Care 24x7 with DMR ProLiant BL460c Gen10 Service | H7LT5E |
| HPE 3 Year Proactive Care Advanced 24x7 ProLiant BL460c Gen10 Service | H7LT7E |

Additional Options

HPE 3 Year Proactive Care Advanced 24x7 with DMR ProLiant BL460c Gen10 Service

H7LT8E

Installation Services

HPE Install c-Class Server Blade Service


UE493E

NOTE: Additional HPE Pointnext operational services can be found at: <https://www.hpe.com/us/en/services/operational.html>

Memory

Memory Subsystem Architecture

Each processor socket contains six memory channels that support one or two DIMMs each for a total of eight (8) DIMMs per installed processor or a grand total of sixteen (16) DIMMs for the server blade

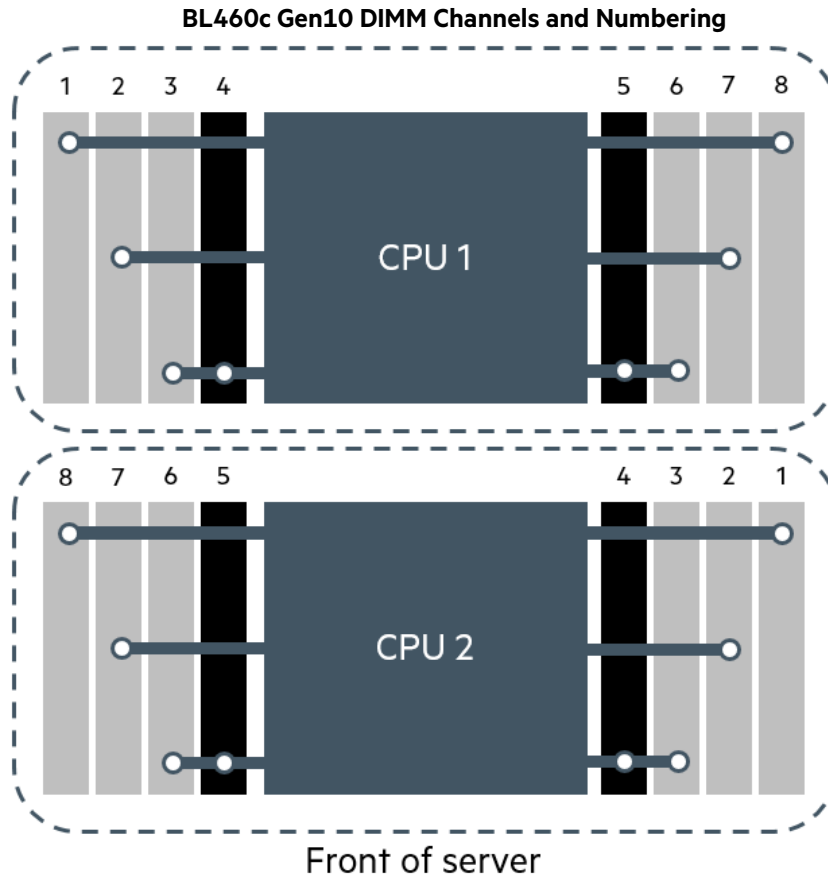

8 DIMM per CPU Population Guidelines

| DIMMs per processor | DIMM # | | | | CPU | DIMM # | | | |
|---------------------|--------|---|---|---|-----|--------|---|---|---|
| | 1 | 2 | 3 | 4 | | 5 | 6 | 7 | 8 |
| 1 DIMM | | | X | | | | | | |
| 2 DIMMs | | X | X | | | | | | |
| 3 DIMMs | X | X | X | | | | | | |
| 4 DIMMs | | X | X | | | | | | |
| 5 DIMMs | X | X | X | | | | X | X | |
| 6 DIMMs | X | X | X | | | | X | X | X |
| 7 DIMMs | X | X | X | X | | | X | X | X |
| 8 DIMMs | X | X | X | X | | X | X | X | X |

NOTE: Chart to be read from left to right. For example, when installing four (4) DIMMs on a processor, DIMMs 2, 3, 6, and 7 should be populated.

Memory

NOTE: For optimal performance, HPE does not recommend configurations with five (5) or seven (7) DIMMs in the BL460c Gen10 server blade.

NOTE: For additional information, please see the HPE SmartMemory QuickSpecs

at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

Memory Population Rules and Guidelines

- A minimum of one DIMM is required per processor.
- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- DIMM sizes can be mixed in channel. To maximize performance, it is recommended to balance the total memory capacity between all installed processors and to load the channels similarly whenever possible.
- LRDIMM and RDIMMs are all distinct memory technologies and cannot be mixed within a compute module.
- DIMMs of different speeds may be mixed in any order; the compute module will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.
- HPE memory from previous generation servers is not compatible with the HPE ProLiant BL460c Gen10 Server Blade.

To realize the performance memory capabilities listed in this document, HPE SmartMemory is required. For additional information, please see the HPE SmartMemory QuickSpecs at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>

BL460c Gen10 Server Blade

Memory Speed Table

| 6DPC | BL460c Gen10 Server Blade | | | |
|--|---------------------------|---------------------------|---------------------------|---------------------------|
| DIMM Type | Register DIMM (RDIMM) | | | |
| HPE SKU P/N | 815097-B21 | 815098-B21 | 835955-B21 | 815100-B21 |
| SKU Description | HPE 8GB 1Rx8 PC4-2666V-R | HPE 16GB 1Rx4 PC4-2666V-R | HPE 16GB 2Rx8 PC4-2666V-R | HPE 32GB 2Rx4 PC4-2666V-R |
| DIMM Rank | Single Rank (1R) | Single Rank (1R) | Dual Rank (2R) | Dual Rank (2R) |
| DIMM Capacity | 8GB | 16GB | 16GB | 32GB |
| Voltage | 1.2V | 1.2V | 1.2V | 1.2V |
| DRAM depth [bit] | 1G | 2G | 1G | 2G |
| DRAM Width [bit] | x8 | x4 | x8 | x4 |
| DRAM Density | 8Gb | 8Gb | 8Gb | 8Gb |
| CAS Latency | 19-19-19 | 19-19-19 | 19-19-19 | 19-19-19 |
| DIMM Native Speed (MT/s) | 2666 | 2666 | 2666 | 2666 |
| HPE Server Memory Speed (MT/s) with Intel Xeon 8100 & 6100 Series Scalable Family Processors (Platinum)(also supported 5122) | | | | |
| 1 DIMM Per Channel | 2666 | 2666 | 2666 | 2666 |
| 2 DIMM Per Channel | 2666 | 2666 | 2666 | 2666 |
| HPE Server Memory Speed (MT/s) with Intel Xeon 5100 & 4100 Series Scalable Family Processors (Silver/Gold)(except for 5122 processor above) | | | | |
| 1 DIMM Per Channel | 2400 | 2400 | 2400 | 2400 |
| 2 DIMM Per Channel | 2400 | 2400 | 2400 | 2400 |
| HPE Server Memory Speed (MT/s) with Intel Xeon 3100 Series Scalable Family Processors (Bronze) | | | | |
| 1 DIMM Per Channel | 2133 | 2133 | 2133 | 2133 |
| 2 DIMM Per Channel | 2133 | 2133 | 2133 | 2133 |

Memory

| DIMM Type | Load Reduced (LRDIMM) | |
|---|---------------------------|----------------------------|
| HPE SKU P/N | 815101-B21 | 815102-B21 |
| SKU Description | HPE 64GB 4Rx4 PC4-2400V-L | HPE 128GB 8Rx4 PC4-2666V-L |
| DIMM Rank | Quad Rank (4R) | Octal Rank (8R) |
| DIMM Capacity | 64GB | 128GB |
| Voltage | 1.2V | 1.2V |
| DRAM depth [bit] | 2G | 2G |
| DRAM Width [bit] | x4 | |
| DRAM Density | 8Gb | 8Gb |
| CAS Latency | 19-19-19 | 19-19-19 |
| DIMM Native Speed (MT/s) | 2666 | 2666 |
| HPE Server Memory Speed (MT/s) with Intel Xeon 8100 & 6100 Series Scalable Family Processors (Gold/Platinum) | | |
| 1 DIMM Per Channel | 2666 | 2666 |
| 2 DIMM Per Channel | 2666 | 2666 |
| HPE Server Memory Speed (MT/s) with Intel Xeon 5100 & 4100 Series Scalable Family Processors (Silver/Gold) | | |
| 1 DIMM Per Channel | 2400 | 2400 |
| 2 DIMM Per Channel | 2400 | 2400 |

Technical Specifications

System Unit

Dimensions

(H x W x D) (with bezel)

7.11 x 2.18 x 20.37 in (18.07 x 5.54 x 51.76 cm)

Weight

(approximate)

Maximum: all processors, 16 DIMMs, hard drives, mezzanine cards, and two flash cache batteries installed) 14.00 lb (6.33 kg)

Minimum: one processor and 2 DIMMs installed 10.50 lb (4.75 kg)

Power Specifications

For power specifications including input requirements, BTU rating, and power supply output, please see the:

- HPE BladeSystem c3000 Enclosure QuickSpecs at <https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=c04123379>
- HPE BladeSystem c7000 Enclosure QuickSpecs at <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04229580>

To review typical system power ratings use the HPE Power Advisor which is available via the online tool located at <https://paonline56.itcs.hpe.com>.

NOTE: For optimal cooling and system performance the BL460c Gen10 Server Blade requires the c7000 enclosure to be configured with 10 fans and the c3000 enclosure to be configured with 6 fans.

System Inlet Temperature

Operating

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1,000 ft) above sea level to a maximum of 3,050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed.

System performance may be reduced if operating with a fan fault or above 30°C (86°F).

Non-operating

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

Extended Ambient Operating Support

For Approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft)

NOTE: Qualifications for extended ambient configurations are detailed at: http://h17007.www1.hpe.com/us/en/enterprise/servers/solutions/info-library/index.aspx?cat=extended_ambient_operating_support#.Wuyykk3rtaQ

Relative Humidity

(non-condensing)

Operating

10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.

Non-operating

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Altitude

Operating

3,050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1,500 ft/min).

Non-operating

9,144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1,500 ft/min).

Acoustic Noise

For acoustic noise specifications, please see the HPE BladeSystem c-Class Enclosures QuickSpecs located at:

Technical Specifications

- HPE BladeSystem c3000 Enclosure
QuickSpecs: <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128340.pdf>
- HPE BladeSystem c7000 Enclosure
QuickSpecs: <https://www.hpe.com/h20195/v2/GetPDF.aspx/c04128339.pdf>

HPE FlexFabric 10Gb 2-port 536FLB FlexibleLOM

| | |
|------------------------------|--|
| Type | Integrated dual-port KR 10Gb FlexibleLOM with FlexFabric (Flex-10, FCoE, hardware-based iSCSI, iSCSI boot, TCP/IP offload engine, and autosensing 1Gb/10Gb Ethernet capability) |
| Network Processor | QLogic 57840S with integrated MAC/PHY |
| Data Transfer Method | x8 PCI Express 3.0 |
| Network Transfer Rate | Two ports, each at 20Gbps full duplex; 40Gbps aggregate full duplex theoretical bandwidth NOTE: Each port is autosensing 1Gb/10Gb, and can interoperate with 1Gb or 10Gb HPE BladeSystem c-Class interconnect components. Both ports will operate at the same speed. NOTE: Each port on the 536FLB adapter transmits from the server at 20Gbps (theoretical) full duplex. |
| IEEE Compliance | 802.1p, 802.1q, 802.1qau, 802.3ad, 802.3ae, 802.3ap (10GBase-KX4) and 802.3x |
| Standard Features | Full hardware offload of iSCSI and FCoE storage protocol processing for highest performance converged Ethernet data and storage networks. Dual-port 10GbE Flex-10 FlexibleLOM network adapter that provides the flexibility to choose the type of LOM to meet growing infrastructure needs Industry-leading throughput and latency performance Supports the HPE Flex-10 blade interconnect technology User configurable bandwidth settings when combined with the 10Gb Flex-10 Virtual Connect module. From 100Mb/s to 10Gb/s on up to four "Physical Function" NICs per port, in increments of 100Mb/s for NIC. The combined bandwidth of NICs cannot exceed port bandwidth i.e. 10 Gb. Up to 40Gb/s bi-directional near line rate throughput Hardware acceleration and offloads for stateless TCP/IP, TCP Offload Engine (TOE) Improved small packet performance Support for Preboot eXecution Environment (PXE) Integrated PHY and MAC Supports for SR-IOV Support for Network Partitioning (NPAR) |

HPE FlexFabric 20Gb 2-port 650FLB FlexibleLOM

| | |
|------------------------------|---|
| Type | Integrated dual-port KR2 20Gb FlexibleLOM with FlexFabric (Flex-20, FCoE, RoCE, Tunnel Offload with VXLAN/NVGRE, hardware-based iSCSI, iSCSI boot, TCP/IP offload engine, and autosensing Ethernet speed capability) |
| Network Processor | Emulex XE-104 |
| Data Transfer Method | x8 PCI Express 3.0 |
| Network Transfer Rate | Two ports, each at 40 Gbps bi-directional; 80 Gbps aggregate bi-directional theoretical bandwidth |
| IEEE Compliance | 802.3ae, 802.1Q, 802.3x, 802.1p, 802.3ad/LACP, 802.1AB(LLDP), 802.1Qbg, 802.1Qbb, 802.1Qaz, 802.3ap |
| Standard Features | Dual 20Gb ports provide up to 80Gb bi-directional per adapter Multi-speed adapter operates at either 20GbE or 10GbE Converges FCoE or RoCE with LAN traffic on a single Ethernet wire Tunnel Offload support for VXLAN and NVGRE RDMA over Converged Ethernet (RoCE) for greater server efficiency and lower latency (6125XLG only) Advanced storage offload processing freeing up valuable CPU cycles Supports UEFI and legacy boot options Mixed Storage – supports NIC + FCoE on one port, and NIC + iSCSI on the other |

Technical Specifications

Concurrent Storage – concurrently supports NIC, FCoE, and iSCSI storage functions on the same port (NIC + FCoE + iSCSI)
Industry-leading throughput and latency performance
Supports the HPE Flex-20 blade interconnect technology
Over eight million small packets/s, ideal for web/mobile applications, mobile messaging, and social media
User configurable bandwidth settings when combined with the 20Gb Flex-20 Virtual Connect module. From 100Mb/s to 10Gb/s on up to four "Physical Function" NICs per port, in increments of 100Mb/s for NIC. The combined bandwidth of NICs cannot exceed port bandwidth i.e. 20 Gb/s.
Greater bandwidth with PCIe 3.0
Jumbo Frames support
Supports Wake On LAN (WOL)
Support for Preboot eXecution Environment (PXE)
Support for Microsoft Windows SMB Direct
Optimized host virtualization density with SR-IOV support

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hpe.com/info/recycle>. To recycle your product, please go to: <http://www.hpe.com/info/recycle> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <http://www.hpe.com/info/recycle>. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|---|
| 06-Aug-2018 | Version 9 | Changed | Overview, Configuration Information - Factory Integrated Models, Core Options, and Additional Options sections were updated. |
| | | Added | SKU added in Configuration Information - Factory Integrated Models section: 875949-L21 |
| 04-Jun-2018 | Version 8 | Changed | Standard Features, Configuration Information-Factory Integrated Models, Core Options, Additional Options, Memory, and Technical Specifications sections were updated. |
| | | Added | SKUs added in QuickSpecs: 875956-L21, 875954-L21, 872009-L21, 872006-L21, 872012-B21, 875583-B21, 875585-B21, 875579-B21, 875581-B21, 878014-B21, P04556-B21, P04560-B21, P04564-B21, P04566-B21, P04570-B21, 873351-B21, 873355-B21, 873357-B21 |
| | | Removed | SKUs removed: 872008-L21, 872008-L21, 872012-B21, 875317-B21, 875319-B21, 880875-B21, 880877-B21. |
| 02-Apr-2018 | Version 7 | Changed | Service and Support, Configuration Information - Factory Integrated Models, Core Options, and Additional Options sections were updated. |
| | | Added | SKUs added in Core Options, and Additional Options sections: 845264-B21, 875587-B21, 875589-B21, 875591-B21, 877984-B21, 877986-B21, 877988-B21, 875593-B21, 875595-B21, 875597-B21, 877994-B21, 877998-B21, 877740-B21, 877746-B21, 877752-B21, 877758-B21, 877764-B21, 877776-B21, 877782-B21, 877788-B21, 880295-B21, P00896-B21, 870753-B21, 870757-B21, 870759-B21, 870765-B21, 765464-B21, 832514-B21, 765466-B21, 881457-B21, 655710-B21, 765455-B21, 880875-B21, 880877-B21, 875330-B21, 875326-B21, 870144-B21, 875313-B21, 875311-B21, 872390-B21, 872392-B21, 872394-B21, 870148-B21, 873359-B21, 873363-B21, 873365-B21, 873367-B21, 872374-B21, 872376-B21, 872382-B21, 872386-B21, 875478-B21, 875474-B21, 875470-B21, 875483-B21, 872481-B21, 872479-B21, 872477-B21, 872475-B21, 875513-B21, 875511-B21, 875509-B21, 875503-B21. |
| 12-Feb-2018 | Version 6 | Changed | Standard Features, Configuration Information - Factory Integrated Models, Core Options, Additional Options, and Memory sections were updated. |
| | | Added | SKUs added in Configuration Information – Factory Integrated Models section: 700076-B21, 700767-B21, 700748-B21, 665246-B21, 655639-B21, 700065-B21, 700763-B21, 766490-B21, 873351-B21, 873355-B21, 873357-B21, 877740-B21, 875503-B21, 877746-B21, 875509-B21, 877752-B21, 875511-B21, 877758-B21, 875513-B21, 877764-B21, 880875-B21, 880877-B21, 875587-B21, 875589-B21, 875591-B21, 875317-B21, 875319-B21, 875498-B21, 875500-B21, 872390-B21, 872392-B21, 872394-B21, 875311-B21, 875313-B21, 875326-B21, 875330-B21, 870144-B21, 870148-B21, 880295-B21, 875483-B21, 877776-B21, 875470-B21, 877782-B21, 875474-B21, 877788-B21, 875478-B21, 877994-B21, 877998-B21, 875488-B21, 875490-B21, 875492-B21, 872374-B21, 873359-B21, 872376-B21, 873363-B21, 872382-B21, 873365-B21, 872386-B21, 873367-B21. |
| | | Removed | SKUs deleted in Configuration Information - Factory Integrated Models, Core Options, and Additional Options sections: 875954-L21, 875955-L21, 875956-L21, 877851-L21, 877807-L21, 875952-L21, 875953-L21, 872009-L21, 872006-L21, 872007-L21, 700066-B21, 700764-B21, 766491-B21, 684214-B21, 759208-B21, 785067-B21, 759210-B21, 759212-B21, 781516-B21, 785069-B21, 781518-B21, 791034-B21, |

Summary of Changes

| | | | |
|-------------|-----------|---------|--|
| | | | 870763-B21, 875492-B21, 872359-B21, 872363-B21, 869374-B21, 869376-B21, 869378-B21, 869384-B21, 869386-B21. |
| 06-Nov-2017 | Version 5 | Changed | QuickSpecs was updated. |
| | | Removed | Obsolete SKUs were deleted: 777262-B21, 777264-B21, 875494-B21, 875496-B21, 736936-B21, 736939-B21, 764892-B21, 764904-B21, 764906-B21, 764908-B21, 815605-B21, 822594-B21, 822593-B21, 815606-B21, 765034-B21, 765036-B21, 765038-B21, 765044-B21. |
| 25-Sep-2017 | Version 4 | Changed | Standard Features section was updated. |
| | | Added | SKU added in Core Options section: 881457-B21. |
| 07-Aug-2017 | Version 3 | Changed | Standard Features and Configuration Information - Factory Integrated Models sections were updated. |
| | | Added | SKUs added: 875943-L21, 875944-L21, 877807-L21, 875945-L21, 875946-L21, 875947-L21, 875488-B21, 875490-B21, 875492-B21, 875494-B21, 875496-B21, 875498-B21, 875500-B21. |
| 17-Jul-2017 | Version 2 | Changed | Information in QuickSpecs was updated. |
| 11-Jul-2017 | Version 1 | Created | New QuickSpecs. |



Sign up for updates



© Copyright 2018 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

a00008517enw - 15939 - Worldwide - V9 - 6-August-2018