

### Overview

#### HPE ProLiant RL300 Gen11

The HPE ProLiant RL300 Gen11 is a single socket server optimized for the next generation of cloud-native compute, which supports a wide range of evolving applications and use cases for service providers and digital-first enterprises.

Built on the legendary HPE ProLiant foundation and powered by Ampere® Altra® and Ampere® Altra® Max processors, the HPE ProLiant RL300 Gen11 offers high core density, power efficiency, and workload performance for the rapidly expanding cloud-native development and application sphere.

This 1P, 1U server delivers more cores for less wattage, with an industry-leading core count of up to 128 cores. Get the most out of your scale-out, cloud-native applications with this efficient server.




#### 10SFF Front View

- |   |                                |
|---|--------------------------------|
| 1. Quick removal access panel                   | 6. NIC status LED              |
| 2. Serial no. label pull tab                    | 7. UID button/LED              |
| 3. iLO Service Port                             | 8. USB 3.2 gen 1 port          |
| 4. Power On/Standby button and system power LED | 9. 10 NVMe Hot Plug Drive Bays |
| 5. Health LED                                   |                                |

**Notes:** Optional: +2 M.2 NVMe drives


### Overview

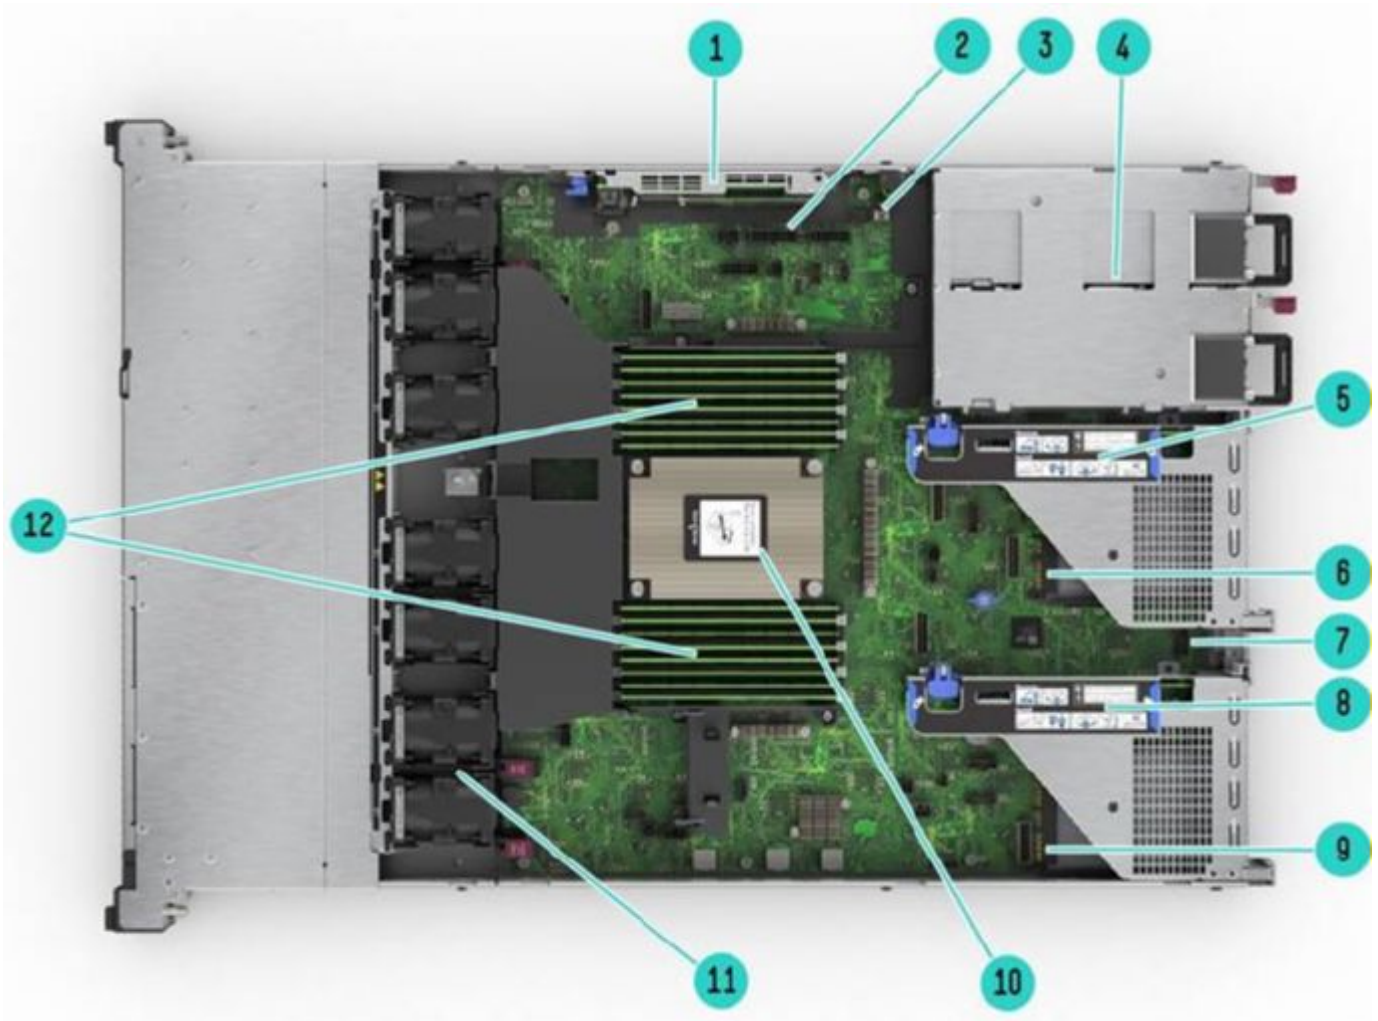

#### Internal View Chassis

- |  |  |
|--|--|
| 1. M.2 Enablement Assembly                             | 7. Serial Port Connector                                 |
| 2. Hard drive backplane power connector                | 8. Primary PCIe riser, standard                          |
| 3. Chassis intrusion detection connector               | 9. OCP 3.0 Slot 1  |
| 4. Hot Plug redundant HPE Flexible Slot Power supplies | 10. Processor (heatsink shown)                           |
| 5. Secondary PCIe Riser, standard                      | 11. Fan cage shown with 7 performance Hot-swappable fans |
| 6. OCP 3.0 Slot 2                                      | 12. DDR4 DIMM slots.                                     |

### Overview

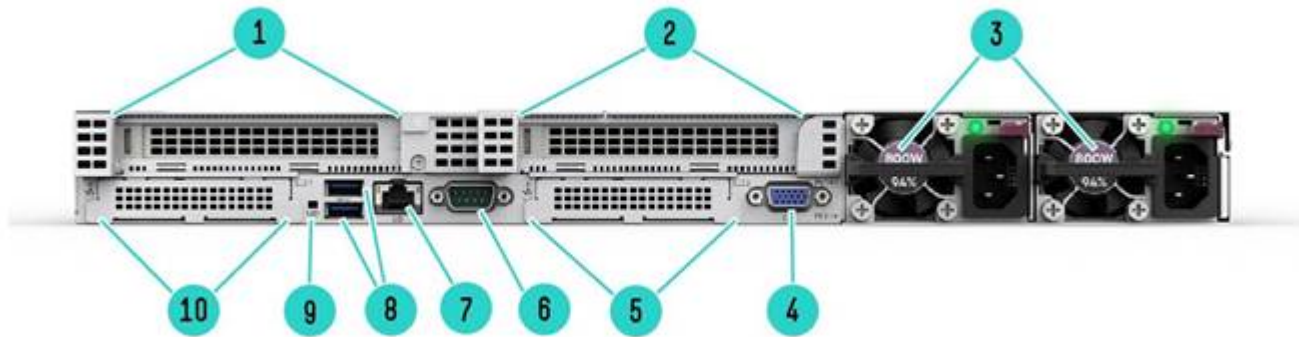

### Rear View

- |   |                            |
|---|----------------------------|
| 1. Slot 1 PCIe 4.0                          | 6. Serial Port (Optional)  |
| 2. Slot 2 PCIe 4.0                          | 7. iLO Management Port     |
| 3. Hot Plug Power Supply 1 and 2 (Optional) | 8. USB 3.2 Gen1 Ports (2)  |
| 4. VGA port                                 | 9. UID LED                 |
| 5. Optional: OCP 3.0 Slot                   | 10. Optional: OCP 3.0 Slot |

### What's New

- The new HPE ProLiant RL300 Gen11 server is the first in a series of HPE ProLiant RL servers that deliver next-generation compute performance with high power efficiency
- Powered by Ampere® Altra® and Ampere® Altra® Max processors
- Dual OCP 3.0 Slots
- Support for up to 10 SFF NVMe drives

### Platform Information

#### Form Factor

- 1U rack

#### Chassis Types

- 8 SFF NVMe U.2/U.3
- 10 SFF NVMe U.2/U.3

**Notes:** Backplane supports both U.2 and U.3 "dynamic" SFF drives. U.3 "static" drives (denoted by U.3ST) are not supported.

#### System Fans

- The HPE ProLiant RL300 Gen11 ships standard with high performance fans.

## Standard Features

**Processors** - One of the following depending on model.

**Notes:** For more information regarding Ampere® Altra® and Ampere® Altra® Max processors, please see the following:

<https://amperecomputing.com/processors/ampere-altra/>

| Ampere® Altra® and Altra® Max Processors | Cores | Max/Nominal Frequency | Max Memory | Est. Usage Power* | TDP  | Cache   | Memory   |
|--|-------|-----------------------|------------|-------------------|------|---|----------|
| M128-30                                  | 128   | 3.0 GHz               | 4TB        | 178W              | 250W | 64 KB L1 I-cache, 64 KB L1 D-cache per core<br>1 MB L2 cache per core<br>16 MB System Level Cache (SLC) | 3200MT/s |
| Q80-30                                   | 80    | 3.0 GHz               | 4TB        | 161W              | 210W | 64 KB L1 I-cache, 64 KB L1 D-cache per core<br>1 MB L2 cache per core<br>32 MB System Level Cache (SLC) | 3200MT/s |

**Notes:**

- Processors that begin with a "Q" (e.g. Q80-30) are Ampere® Altra® Processors
- Processors that begin with an "M" (e.g. M128-30) are Ampere® Altra® Max Processors
- Ampere® Altra® and Ampere® Altra® Max processors, being single threaded, deliver consistent frequency denoted by the Max Frequency irrespective of the number of cores operational.
- \*Estimated usage power is provided to guide selections based on estimated power consumption. The estimated power usage has been provided by Ampere® where usage power data is based on estimated SPECrate® 2017\_int\_base (GCC10) and is subject to change based on system configuration and other factors. Ampere® defines Usage Power as average power consumed over time by a given workload.

## On System Management Chipset

HPE iLO 6 ASIC

**Notes:** Read and learn more in the [iLO QuickSpecs](#).

## Memory

One of the following depending on model

### Standard Features

| Type                             | HPE DDR4 Smart Memory | Registered (RDIMM), Load Reduced (LRDIMM)                                  |
|----------------------------------|-----------------------|--|
| <b>DIMM Slots Available</b>      | 16                    | 16 DIMM slots per processor, 8 channels per processor, 2 DIMMs per channel |
| <b>Maximum capacity (RDIMM)</b>  | 1.0 TB                | 16 x 64 GB RDIMM @ 3200 MT/S at 1 or 2 DPC                                 |
| <b>Maximum capacity (LRDIMM)</b> | 4.0 TB                | 16 x 256 GB LRDIMM @ 3200 MT/s at 1 or 2 DPC                               |

**Notes:** The maximum memory speed is dependent on the DIMM selection.

### Memory Protection

#### Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and multibit error that occurs within a single DRAM chip.

### Expansion Slots

| Default Risers      |            |           |                 |                               |        |
|---------------------|------------|-----------|-----------------|-------------------------------|--------|
| Slots #             | Technology | Bus Width | Connector Width | Slot Form Factor              | Notes  |
| 1 (Primary Riser)   | PCIe 4.0   | X16       | X16             | Full-height, Full-length slot | Proc 1 |
| 2 (Secondary Riser) | PCIe 4.0   | X16       | X16             | Full-height, Half-length slot | Proc 1 |

| OCP Expansion Slots   |                               |                                |
|-----------------------|-------------------------------|--------------------------------|
| Chassis configuration | OCP Slot 1 Bus Width          | OCP Slot 2 Bus Width           |
| 10SFF CTO Server      | Standard: x8<br>Upgrade: NA*  | Standard: x8<br>Upgrade: x16** |
| 8SFF CTO Server       | Standard: x8<br>Upgrade: x16* | Standard: x8<br>Upgrade: x16** |

#### Notes:

- Bus width indicated the number of electrical lanes running to the connector.
- Both the primary and secondary riser are included by default for all HPE ProLiant RL300 Gen11 servers.
- \*OCP Slot 1 can be upgraded from X8 to X16 only when the 8SFF CTO server chassis is selected with the HPE ProLiant RL300 Gen11 OCP1 Upgrade Cable Kit (P58922-B21). OCP Slot 1 cannot be upgraded to X16 when the 10SFF CTO server chassis is selected.
- \*\*OCP Slot 2 can be upgraded from X8 to X16 with the HPE ProLiant RL300 Gen11 OCP2 Upgrade Cable Kit (P58924-B21). OCP Slot 2 can be upgraded when either the 8SFF CTO server chassis or the 10SFF CTO server chassis is selected.

### Internal Storage Devices

One of the following depending on model

#### Hard Drives

- None ship standard

## Standard Features

| Maximum Internal Storage       |          |               |
|--------------------------------|----------|---------------|
|                                | Capacity | Configuration |
| Hot Plug SFF NVMe PCIe U.3 SSD | 153.6 TB | 10 x 15.36 TB |

## Interfaces

|  |                                |
|--|--------------------------------|
| Serial                                 | Optional, rear                 |
| Video Port                             | 1 Rear VGA Port - Standard     |
| HPE iLO Remote Management Network Port | 1 Gb Dedicated                 |
| Front iLO Service Port                 | 1 standard                     |
| USB 3.2 Gen1                           | Up to 3 total: 1 front, 2 rear |

## European Union (EU) Lot 9 regulation

Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.

HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline. For more information regarding HPE Lot 9 conformance, please visit: <https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

## Power Supply

- HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit

## Notes:

–Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.

–800W Flex Slot Titanium Plus power supplies must be used with high-line input (200V-240V AC).

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen11 Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

For information on power specifications and technical content visit [HPE Server power supplies](#).

### Standard Features

---

#### Operating Systems Support for the RL300 ProLiant Server

Please see [HPE Servers Support & Certification Matrices](#) for versioning details via hyperlinks provided below:

- [Canonical Ubuntu](#)
  - [Oracle Linux - Oracle Linux 8](#)
  - [Red Hat Enterprise Linux \(RHEL\)](#)
  - [SUSE Linux Enterprise Server \(SLES\)](#)
- 

#### Embedded Management

##### HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO.

Learn more at <http://www.hpe.com/info/ilo>.

##### UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

##### iLO RESTful API

iLO RESTful API is Redfish API conformance and offer simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at

<http://www.hpe.com/info/restfulapi>.

##### OpenBMC Support

OpenBMC Capable through iLO6 Transfer of Ownership Process.

Learn more at [OpenBMC Support](#)

---

#### HPE Server UEFI

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen11 servers have a UEFI Class 3 implementation.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.2 Gen1 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- UEFI Boot Mode only
- NVMe Boot Support
- iSCSI Software Initiator Support.
- HTTP/HTTPs Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

**Notes:** No support for Legacy mode

---

## Standard Features

---

### Server Utilities

#### Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

#### Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

#### HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

#### RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

#### Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/powershell>.

---

### Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**Notes:** Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

---



### Optional Features

#### Server Management

##### HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. All HPE ProLiant RL300 Gen11 servers have all iLO Advanced features supported by the server enabled by default.

---

#### Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go - and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°C, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

---

### Service and Support

#### HPE Pointnext - Service and Support

**Get the most from your HPE Products.** Get the expertise you need at every step of your IT journey with **HPE Pointnext Services**. We help you lower your risks and overall costs using automation and methodologies that have been tested and refined by HPE experts through thousands of deployments globally. HPE Pointnext **Advisory Services**, focus on your business outcomes and goals, partnering with you to design your transformation and build a roadmap tuned to your unique challenges. Our **Professional** and **Operational Services** can be leveraged to speed up time-to-production, boost performance and accelerate your business. HPE Pointnext specializes in flawless and on-time implementation, on-budget execution, and creative configurations that get the most out of software and hardware alike.

#### Consume IT on your terms

**HPE GreenLake** brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

#### Managed services to run your IT operations

**HPE GreenLake Management Services** provides services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

---

#### Recommended Services

##### HPE Pointnext Tech Care.

HPE Pointnext Tech Care is the new operational service experience for HPE products. Tech Care goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Pointnext Tech Care has been reimagined from the ground up to support a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Pointnext Tech Care is available in three response levels. Basic, which provides 9x5 business hour availability and a 2 hour response time. Essential which provides a 15 minute response time 24x7 for most enterprise level customers, and Critical which includes a 6 hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

##### HPE Pointnext Complete Care

HPE Pointnext Complete Care is a modular, edge-to-cloud IT environment service that provides a holistic approach to optimizing your entire IT environment and achieving agreed upon IT outcomes and business goals through a personalized and customer-centric experience. All delivered by an assigned team of HPE Pointnext Services experts. HPE Pointnext Complete Care provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/complecare>

### Service and Support

#### Other related Services

##### **HPE Server Hardware Installation**

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://h20195.www2.hpe.com/v2/Getdocument.aspx?docname=5981-9356enw>

##### **HPE Installation and Startup Service**

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

##### **DC for Hyperscale**

Complete Care for Hyperscale is available for Service Providers and HPC customers who use a scale out approach to computing with a high volume homogenous infrastructure and resilient architecture can take advantage of this environment support tailored to their operating model.

##### **HPE Factory Express for Servers and storage**

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAXXX3PAR suite, XP, rackable tape libraries and configurable network switches.

##### **HPE Service Credits**

HPE Service Credits offers flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

##### **HPE Education Services**

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

<http://www.hpe.com/ww/learn>

---

### Service and Support

#### HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>.

The HPE Support Center Mobile App\* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

**Notes:** \*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>.

**Notes:** HPE ProLiant RL300 Gen11 Server is covered under the HPE Service Contract applied to the HPE ProLiant Server. No separate HPE support services need to be purchased.

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [here](#).

---

#### Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

---

### Configuration Information

#### Mainstream SKUs

HPE launched the Mainstream SKU initiative as a market-driven approach to Demand Steering. It is a simplified portfolio of our top selling options that meet the current and future market trends. HPE has committed to provide a more predictable and faster experience for these options. Mainstream SKUs enjoy higher safety stock levels and have higher fulfillment service levels than non-Mainstream SKUs. Mainstream orders are fulfilled +30% faster than non-Mainstream orders, have fewer shortages and better recovery dates. This platform has Mainstream SKUs in the options portfolio, and is eligible for the improved Mainstream experience. Mainstream SKUs are designated with a Mainstream symbol in our configurators.

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information.

#### Step 1: Base Configuration (choose one of the following configurable models)

| CTO Server                     | HPE ProLiant RL300 Gen11 M128-30 10SFF CTO Server                      | HPE ProLiant RL300 Gen11 Q80-30 10SFF CTO Server | HPE ProLiant RL300 Gen11 M128-30 8SFF CTO Server | HPE ProLiant RL300 Gen11 Q80-30 8SFF CTO Server |
|--------------------------------|--|--|--|---|
| SKU Number                     | P59867-B21   | P59868-B21                                       | P59869-B21                                       | P59870-B21                                      |
| Processor                      | M128-30  | Q80-30   | M128-30  | Q80-30  |
| DIMM Slots                     | 16-DIMM slots  |  |  |   |
| Storage Controller             | Storage controllers not supported                                      |  |  |   |
| PCIe                           | Two standard in primary riser in addition to two OCP3.0 Slots          |  |  |   |
| Drive Cage - included          | 10 SFF   | 10 SFF   | 8 SFF  | 8 SFF   |
| Additional Network Controllers | Two OCP 3.0 PCIe Gen4 slots available                                  |  |  |   |
| Fans                           | The HPE ProLiant RL300 Gen11 ships standard with high performance fans |  |  |   |
| Management                     | HPE iLO for HPE ProLiant RL ships standard and enabled by default      |  |  |   |
| USB                            | Front: 1 USB 3.2 Gen1 + iLO service port<br>Rear: 2 USB 3.2 Gen1       |  |  |   |

**Notes:** CTO servers do not ship with rail kits, they need to be ordered separately

#### Configuration Information

|                     |                  |                   |
|---------------------|------------------|-------------------|
| CTO Server          | 8 FF CTO Chassis | 10SFF CTO Chassis |
| Included Drive Cage | 8 SFF            | 10 SFF            |
| Universal Media Bay | Not Available    | Not Available     |

**Notes:** This applies to CTO configurations, field upgrades may differ depending field configuration.

### Configuration Information

---

#### Step 2: Choose Required Options (only one of the following unless otherwise noted)

##### Step 2a: Choose Memory Options

Please select one or more memory from below.

Memory population rules can be found at: <https://www.hpe.com/docs/server-memory>

##### Notes:

- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- Quantity of memory DIMMs selected must be 1,2,4,8 or 16
- Memory compatibility may vary or be limited within a specific server family depending upon the specific configuration being requested. Because each server environment and requirements can vary, memory compatibility is based not only upon the server family, but may also be affected by the amount and type of additional hardware options installed within a specific server configuration. For this reason, some HPE memory DIMMs may be qualified for a server model or family and yet occasionally not be supported with limited configurations within that server family. Please consult with the HPE server Quickspecs or your HPE representative if you have any questions regarding memory compatibility with a specific HPE server configuration.

##### Registered DIMMs (RDIMMs)

|   |            |
|---|------------|
| HPE 16GB (1x16GB) Single Rank x4 DDR4-3200 CAS-22-22-22 Registered Memory Kit | P56425-B21 |
| HPE 32GB (1x32GB) Single Rank x4 DDR4-3200 CAS-22-22-22 Registered Memory Kit | P56427-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Memory Kit   | P56429-B21 |
| HPE 64GB (1x64GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Memory Kit   | P56431-B21 |

##### Load Reduced DIMMs (LRDIMMs)

|  |            |
|--|------------|
| HPE 256GB (1x256GB) Octal Rank x4 DDR4-3200 CAS-26-22-22 Load Reduced 3DS Memory Kit | P56435-B21 |
|--|------------|

##### Notes:

- 16GB~256GB memory SKUs can run the transfer rate of 3200 MT/s at both 1 DIMM and 2 DIMM per channel
- Only homogenous configurations are supported. Mixing of DIMM capacities is not allowed

##### Step 2b: Choose Power Supplies

Select one or two power supplies from below.

|   |            |
|---|------------|
| HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit | 865438-B21 |
|---|------------|

**Notes:** All power supplies in a server should match. Mixing Power Supplies is not supported.

---

#### Step 3: Choose Additional Factory Integratable Options

One of the following from each list may be selected if desired at time of factory integration

##### HPE Unique Options

|  |            |
|--|------------|
| HPE DL38X Gen10 Plus Rear Serial Cable Kit | P14606-B21 |
|--|------------|

### Configuration Information

**Notes:**

- Field-upgradable serial connector upgrade where the serial connector is attached to the cable.
- The connector is mounted to the server chassis and the cable is plugged into system board

HPE ProLiant RL300 Gen11 OCP1 Upgrade Cable Kit

P58922-B21

**Notes:**

- Used to upgrade OCP slot 1 from X8 to X16. OCP Slot 1 can be upgraded from X8 to X16 only when the 8SFF CTO server chassis is selected.
- OCP Slot 1 cannot be upgraded to X16 when the 10SFF CTO server chassis is selected.

HPE ProLiant RL300 Gen11 OCP2 Upgrade Cable Kit

P58924-B21

**Notes:**

- Used to upgrade OCP slot 2 from X8 to X16. OCP Slot 2 can be upgraded from X8 to X16.
- OCP Slot 2 can be upgraded when either the 8SFF CTO server chassis or the 10SFF CTO server chassis is selected.

**BIOS Mode**

UEFI is the default, legacy mode is not supported

---

### **Step 4: Choose additional options for Factory Integration from Core and Additional Options sections below**

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

---

## Core Options

**SSD Selection**

To streamline the configuration process for HPE ProLiant Gen11 servers and to provide the best product availability, HPE recommends SSDs from the list located here: <http://www.hpe.com/products/recommend>.

**Read Intensive - NVMe - SFF - Solid State Drives**

|  |            |
|--|------------|
| HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD  | P50216-B21 |
| HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD  | P50219-B21 |
| HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD  | P50222-B21 |
| HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD | P50224-B21 |

**Notes:** Additional drive capacity options to be released incrementally following launch

**Internal Dual M.2 Kit**

|   |            |
|---|------------|
| HPE ProLiant RL300 Gen11 M.2 Enablement Kit | P58621-B21 |
|---|------------|

**Notes:** Enables M.2 drives for the HPE ProLiant RL300 Gen11

**Read Intensive - M.2 - Solid State Drives**

|   |            |
|---|------------|
| HPE 480GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD  | P40513-B21 |
| HPE 960GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD  | P40514-B21 |
| HPE 1.92TB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD | P40515-B21 |

**Hard Drive Blank Kits**

|  |            |
|--|------------|
| HPE Small Form Factor Hard Drive Blank Kit | 666987-B21 |
|--|------------|

**HPE Networking****PCIe Adapters****10/25 Gigabit Ethernet adapters**

|   |            |
|---|------------|
| Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P42044-B21 |
|---|------------|

**100/200 Gigabit Ethernet adapters**

|  |            |
|--|------------|
| Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE | P25960-B21 |
|--|------------|

**OCP Adapter**

|  |            |
|--|------------|
| Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | P42041-B21 |
|--|------------|

**Notes:** Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information: [https://www.hpe.com/psnow/doc/A00002507ENW.pdf?jumpid=in\\_lit-psnow-getpdf](https://www.hpe.com/psnow/doc/A00002507ENW.pdf?jumpid=in_lit-psnow-getpdf)

**HPE Power Supplies**

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Plus Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

|   |            |
|---|------------|
| HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit | 865438-B21 |
|---|------------|

**Notes:**

– Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.

– Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the



### Core Options

United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements. HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

---

### Additional Options

#### Embedded Management

##### HPE iLO Advanced

**Notes:** All HPE ProLiant RL300 Gen11 servers have all iLO Advanced features supported by the server enabled by default.

---

#### HPE Racks

- Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
  - Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
  - Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
- 

#### HPE Power Distribution Units (PDUs)

- Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
  - Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
  - Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
  - Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- 

#### HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).
  - Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
  - Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.
- 

#### HPE Rack Options

- Please see the [HPE KVM Switches web page](#) for information on these products and their specifications.
- 

#### Rail Kits

Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative (695539-001).

---

### Additional Options

#### Notes:

- CTO servers do not ship with rail kits ,they need to be ordered seperately
- Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

|  |            |
|--|------------|
| HPE DL3XX Gen11 Easy Install Rail 2 Kit                            | P52351-B21 |
| HPE ProLiant DL300 Gen10 Plus 1U Cable Management Arm for Rail Kit | P26489-B21 |

---

### HPE Support Services

#### Tech Care

|  |        |
|--|--------|
| HPE 3 Year Tech Care Basic RL300 Gen11 HW Service          | H36SDE |
| HPE 3 Year Tech Care Basic wDMR RL300 Gen11 HW Service     | H36SFE |
| HPE 3 Year Tech Care Basic wCDMR RL300 Gen11 HW Service    | H36SGE |
| HPE 5 Year Tech Care Essential RL300 Gen11 HW Service      | H36TPE |
| HPE 5 Year Tech Care Essential wDMR RL300 Gen11 HW Service | H36TQE |
| HPE 5 Year Tech Care Critical for RL300 Gen11 HW Service   | H36TSE |
| HPE 5 Year Tech Care Critical wDMR RL300 Gen11 HW Service  | H36TTE |
| HPE 5 Year Tech Care Critical wCDMR RL300 Gen11 HW Service | H36TVE |

**Notes:** For a full listing of support services available for this server, please visit <http://www.hpe.com/services>.

---

### Technical Specifications

#### System Unit

- **Dimensions** (Height x Width x Depth)
    - 4.29 x 43.46 x 64.69 cm / 1.69 x 17.11 x 25.57 in
  - **Weight** (approximate)
    - Chassis with CPU/CPU heatsink installed: 12.27kgs (27.06lbs)
    - Drive: 0.2kgs (0.44lbs)
    - Memory: 0.02kgs (0.04lbs)
    - Power Supply: 0.87kgs (1.92lbs)
    - Maximum weight with 16 DIMMS, 10 HDDs, 2 Power Supplies: 15.85kgs (35.94lbs)
- 

#### Input Requirements(per power supply)

##### Rated Line Voltage

- 200 to 240 VAC
- 

#### BTU Rating

##### Maximum

- For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only
- 

#### Power Supply Output(per power supply)

- **Rated Steady-State Power**
    - For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only
  - **Maximum Peak Power**
    - For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 1VAC), 800W (at 240 VAC) input for China only
- 

#### System Inlet Temperature

- **Standard Operating Temperature**
    - 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.
    - System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
  - **Extended Ambient Operating Temperature**
    - For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C
-

### Technical Specifications

per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:<http://www.hpe.com/servers/ashrae>

- For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:

<http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- **Non-operating**

- -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
- 

### Relative Humidity(non-condensing)

- **Operating**

- 8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

- **Non-operating**

- 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
- 

### Altitude

- **Operating**

- 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

- **Non-operating**

- 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
- 

### Emissions Classification (EMC) - Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

---

### Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers [end-of-life product return, trade-in, and recycling programs](#), in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

---

## Technical Specifications

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

---



## Summary of Changes

| Date        | Version History | Action  | Description of Change  |
|-------------|-----------------|---------|--|
| 19-Oct-2023 | Version 4       | Changed | Standard Features section was updated  |
| 05-Sep-2023 | Version 3       | Changed | Standard Features and Core Options sections were updated   |
| 17-Apr-2023 | Version 2       | Changed | Correction of errors and addition of new drive and networking options<br>Overview, Standard Features and Core Options sections were updated. |
| 12-Sep-2022 | Version 1       | New     | New QuickSpecs.  |

### Copyright

---

Make the right purchase decision. Contact our presales specialists.



---

© Copyright 2023 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a50004294enw - 16898 - Worldwide - V4 - 19-October-2023