

# WS-C2960+48PST-L Datasheet

[Get a Quote](#)

## Overview

The WS-C2960+48PST-L is a LAN Base switch that provides 48 x 10/100 PoE Ethernet ports, 2 x 1000BT and 2 x SFP uplink interfaces.

### Quick Specs

Figure 1 shows the appearance of WS-C2960+48PST-L.

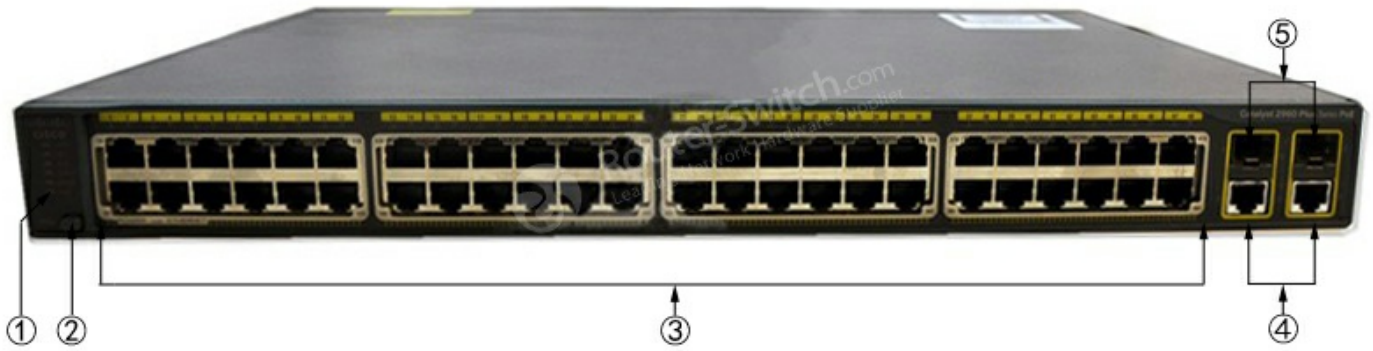


Table 1 shows the Quick Specs.

<b>Product Code</b>	WS-C2960+48PST-L
<b>Enclosure Type</b>	Rack-mountable 1U
<b>Feature Set</b>	LAN Base
<b>Uplink Interfaces</b>	2 x SFP and 2 x 1000BASE-T
<b>Ports</b>	48 x 10/100 Ethernet Ports
<b>Available PoE Power</b>	370W
<b>Maximum Number of PoE (IEEE 802.3af) Ports</b>	24 ports up to 15.4W
<b>Forwarding Bandwidth</b>	16 Gbps
<b>RAM</b>	128MB
<b>Flash Memory</b>	64MB
<b>Dimensions</b>	4.4cm x 45.0cm x 33.2cm
<b>Package Weight</b>	9.19 Kg

### Product Details

Figure 2 shows the front panel of WS-C2960+48PST-L.



Note:

(1) Switch LEDs (2) Mode Button (3) 10/100 PoE ports (4) 10/100/1000 uplink ports (5) SFP module slots

·The Switch LEDs include SYST, RPS, Status, PoE, Duplex and Speed LEDs.

·10/100 PoE ports mean that Ports 1 to 48 on the switch are PoE ports

·Each of the PoE ports deliver up to 15.4 W of PoE.

**Figure 3 shows the back panel of WS-C2960+48PST-L.**



Note:

(1) RJ-45 console port (2) Fan exhaust (3) RPS connector (4) AC power connector

## The Accessories

**Table 2 shows the accessories of WS-C2960+48PST-L.**

Models	Description
<a href="#">CAB-CONSOLE-RJ45</a>	Console Cable 6ft with RJ45 and DB9F
<a href="#">GLC-SX-MMD</a>	1000BASE-SX SFP transceiver module, MMF, 850nm, DOM
<a href="#">GLC-LH-SM</a>	GE SFP, LC connector LX/LH transceiver

## Get more information

Do you have any question about the Cisco C2960+48PST-L switch?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

## WS-C2960+48PST-L Specification

### Configurations

10/100 Ethernet Interfaces	48
Uplink Interfaces	2 SFP and 2 1000BASE-T
Cisco IOS Software Feature Set	LAN Base
Available PoE Power	370W (24 ports up to 15.4W)

### Hardware

Flash memory	64 MB
DRAM	128 MB

### Performance and Scalability

Forwarding bandwidth	16 Gbps
Maximum active VLANs	255
VLAN IDs available	4K
Maximum transmission unit (MTU) - L3 packet	9000 bytes
Jumbo frame - Ethernet frame	9018 bytes
Forwarding Rate: 64-Byte L3 Packets, Millions of packets per second	13.1

### Mechanical

Dimensions (H x W x D)	1.73 x 17.70 x 13.07 in (4.4 x 45.0 x 33.2 cm)
Weight	12 lb (5.4Kg)
Package Weight	20.26 lb (9.19 Kg)

### Environmental Ranges

Operating temperature up to 5000 ft (1500 m)	23° to 113°F (-5° to 45°C)
Operating temperature up to 10,000 ft (3000 m)	23° to 104°F (-5° to 40°C)

Short-term exception at sea level*	23° to 131°F (-5° to 55°C)
Short-term exception up to 5000 feet (1500 m)*	23° to 122°F (-5° to 50°C)
Short-term exception up to 10,000 feet (3000 m)*	23° to 113°F (-5° to 45°C)
Short-term exception up to 13,000 feet (4000 m)*	23° to 104°F (-5° to 40°C)
Storage temperature up to 15,000 feet (4573 m)	23° to 158°F (-25° to 70°C)
Operating altitude	Up to 10,000 Feet (Up to 3,000 Meters)
Storage altitude	Up to 13,000 Feet (Up to 4,000 Meters)
Operating relative humidity	10% to 95% noncondensing
Storage relative humidity	10% to 95% noncondensing
Sound Pressure, dBA	Typical, LpAm: 41 Maximum, LpAD: 44
Sound Power, dbA	Typical, LwA: 51 Maximum, LwAD: 54
MTBF in thousands of hours	312
<b>Connectors and Interfaces</b>	
Ethernet Interfaces	10BASE-T ports: RJ-45 connectors, 2-pair Category 3, 4, or 5 unshielded twisted-pair (UTP) cabling 100BASE-TX ports: RJ-45 connectors, 2-pair Category 5 UTP cabling 1000BASE-T ports: RJ-45 connectors, 4-pair Category 5 UTP cabling 1000BASE-T SFP-based ports: RJ-45 connectors, 4-pair Category 5 UTP cabling
Indicator LEDs	Per-port status: Link integrity, disabled, activity, speed, and full duplex System status, Port Status, PoE, RPS, link duplex, and link speed
Console	Cisco Catalyst console cables: CAB-CONSOLE-RJ45 Console cable 6 ft. with RJ-45
Power	The internal power supply is an auto-ranging unit and supports input voltages between 100 and 240V AC. Use the supplied AC power cord to connect the AC power connector to an AC power outlet. The Cisco RPS connector offers connection for an optional Cisco RPS 2300 that uses AC input and supplies DC output to the switch. Only the Cisco RPS 2300 (model PWR-RPS2300) should be attached to the redundant-power-system receptacle.
<b>Management and Standards Support</b>	

Management	BRIDGE-MIB CISCO-CABLE-DIAG-MIB CISCO-CDP-MIB CISCO-CLUSTER-MIB CISCO-CONFIG-COPY-MIB CISCO-CONFIG-MAN-MIB CISCO-DHCP-SNOOPING-MIB CISCO-ENTITY-VENDORTYPE-OID-MIB CISCO-ENVMON-MIB CISCO-ERR-DISABLE-MIB CISCO-FLASH-MIB CISCO-FTP-CLIENT-MIB CISCO-IGMP-FILTER-MIB CISCO-IMAGE-MIB CISCO-IP-STAT-MIB CISCO-LAG-MIB CISCO-MAC-NOTIFICATION-MIB CISCO-MEMORY-POOL-MIB CISCO-PAGP-MIB CISCO-PING-MIB CISCO-POE-EXTENSIONS-MIB CISCO-PORT-QOS-MIB CISCO-PORT-SECURITY-MIB CISCO-PORT-STORM-CONTROL-MIB CISCO-PRODUCTS-MIB CISCO-PROCESS-MIB CISCO-RTTMON-MIB CISCO-SMI-MIB CISCO-STP-EXTENSIONS-MIB CISCO-SYSLOG-MIB CISCO-TC-MIB CISCO-TCP-MIB CISCO-UDLDP-MIB CISCO-VLAN-IPTABLE RELATIONSHIP-MIB CISCO-VLAN-MEMBERSHIP-MIB CISCO-VTP-MIB ENTITY-MIB ETHERLIKE-MIB IEEE8021-PAE-MIB IEEE8023-LAG-MIB IF-MIB INET-ADDRESS-MIB OLD-CISCO-CHASSIS-MIB OLD-CISCO-FLASH-MIB OLD-CISCO-INTERFACES-MIB OLD-CISCO-IP-MIB OLD-CISCO-SYS-MIB OLD-CISCO-TCP-MIB OLD-CISCO-TS-MIB RFC1213-MIB RMON-MIB RMON2-MIB SNMP-FRAMEWORK-MIB SNMP-MPD-MIB SNMP-NOTIFICATION-MIB SNMP-TARGET-MIB SNMPv2-MIB TCP-MIB UDP-MIB ePM MIB
------------	---

Standards	<p>IEEE 802.1D Spanning Tree Protocol  IEEE 802.1p CoS Prioritization  IEEE 802.1Q VLAN  IEEE 802.1s  IEEE 802.1w  IEEE 802.1X  IEEE 802.1ab (LLDP)  IEEE 802.3ad  IEEE 802.3af  IEEE 802.3ah (100BASE-X single/multimode fiber only)  IEEE 802.3x full duplex on 10BASE-T, 100BASE-TX, and 1000BASE-T ports  IEEE 802.3 10BASE-T  IEEE 802.3u 100BASE-TX  IEEE 802.3ab 1000BASE-T  IEEE 802.3z 1000BASE-X  RMON I and II standards  SNMP v1, v2c, and v3</p>
RFC compliance	<p>RFC 768 - UDP  RFC 783 - TFTP  RFC 791 - IP  RFC 792 - ICMP  RFC 793 - TCP  RFC 826 - ARP  RFC 854 - Telnet  RFC 951 - Bootstrap Protocol (BOOTP)  RFC 959 - FTP  RFC 1112 - IP Multicast and IGMP  RFC 1157 - SNMP v1  RFC 1166 - IP Addresses  RFC 1256 - Internet Control Message Protocol (ICMP) Router Discovery  RFC 1305 - NTP  RFC 1492 - TACACS+  RFC 1493 - Bridge MIB  RFC 1542 - BOOTP extensions  RFC 1643 - Ethernet Interface MIB  RFC 1757 - RMON  RFC 1901 - SNMP v2C  RFC 1902-1907 - SNMP v2  RFC 1981 - Path MTU Discovery for IPv6  RFC 2068 - HTTP  RFC 2131 - DHCP  RFC 2138 - RADIUS  RFC 2233 - IF MIB v3  RFC 2373 - IPv6 Aggregatable Addrs  RFC 2460 - IPv6  RFC 2461 - IPv6 Neighbor Discovery  RFC 2462 - IPv6 Autoconfiguration  RFC 2463 - ICMP IPv6  RFC 2474 - Differentiated Services (DiffServ) Precedence  RFC 2597 - Assured Forwarding  RFC 2598 - Expedited Forwarding  RFC 2571 - SNMP Management  RFC 3046 - DHCP Relay Agent Information Option  RFC 3376 - IGMP v3  RFC 3580 - 802.1X RADIUS</p>
<b>Voltage and Power Ratings</b>	
Voltage (Autoranging)	100 to 240 VAC
Current (Amperes)	4.0 - 2.0
Frequency	50 to 60Hz
Power Rating (kVA)	0.46
DC Input Voltages (RPS Input)	3A at 12V (7A at -52V)

Power Consumption	0% traffic: 51.1 10% traffic: 50.8 100% traffic: 51.4 ATIS weighted average: 50.9
<b>Safety and Compliance</b>	
Regulatory Compliance	Products should comply with CE Marking per directives 2004/108/EC and 2006/95/EC
Safety	UL 60950-1 Second Edition CAN/CSA-C22.2 No. 60950-1 Second Edition EN 60950-1 Second Edition IEC 60950-1 Second Edition AS/NZS 60950-1
EMC - Emissions	47CFR Part 15 (CFR 47) Class A AS/NZS CISPR22 Class A CISPR22 Class A EN55022 Class A ICES003 Class A VCCI Class A EN61000-3-2 EN61000-3-3 KN22 Class A CNS13438 Class A
EMC - Immunity	EN55024 CISPR24 EN300386 KN24
Environmental	Reduction of Hazardous Substances (RoHS) including Directive 2011/65/EU

## Download Resource

---

### Selection Decision

 [Cisco's New Switch Selection Decision 2018](#)

### Support and Resources

 [Cisco Switch Catalyst 2960-Plus Series Datasheet](#)

### Transition Guide

 [Cisco Catalyst 2960/2960-SF/2960-S Series Transition Guide](#)

 [Guide to Upgrade Cisco Access and Backbone Switch](#)

 [Selecting Cisco Switches-Campus, Branch, Digital Building](#)

## Want to Buy

---

[Order Now](#)

[Get a Quote](#)

## Why Router-switch.com

---

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.





200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

## Contact Us

---

- Tel: +1-626-239-8066 (USA) 852-30691898/ 852-30691868 (Hong Kong)
- Fax: 852-30691898 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)